

# PSR-...- 24DC/FSP/2X1/1X2

## SIL coupling relay

Data sheet  
104510\_en\_01

© PHOENIX CONTACT 2013-06-20



### 1 Description

The **PSR-FSP** SIL coupling relay can be used for power adaptation and electrical isolation in high and low demand applications up to SIL3 according to IEC 61508, EN 61511 as well as EN 50156.

The safety relay is equipped with two enabling current paths that drop out without delay corresponding to stop category 0 according to DIN EN 60204-1.

By filtering the control controller test pulses, premature failure of the forcibly guided safety relay is prevented.

### Features

- SIL3 coupling relay for safety-related switching off
- can be used in high and low demand applications
- Easy proof test according to IEC 61508 due to forcibly guided alarm contact
- Integrated DCS test pulse filter
- Low inrush current
- Two undelayed enable contacts
- Optional plug-in screw or spring-cage terminal blocks

**WARNING: Risk of electric shock**

Observe the safety instructions in the corresponding section.



Make sure you always use the latest documentation.  
It can be downloaded from the product at [phoenixcontact.net/products](http://phoenixcontact.net/products).



This data sheet is valid for all products listed on the following page:

---

<b>2</b>	<b>Table of contents</b>	
1	Description .....	1
2	Table of contents .....	2
3	Ordering data .....	3
4	Technical data .....	3
5	Basic circuit diagram .....	6
6	Derating .....	6
7	Load curve - resistive load .....	7
8	Load curve - inductive load .....	7
9	Safety notes.....	8
10	Pin assignment .....	9
11	Application examples .....	10
	11.1 Single-channel connection with integration of the confirmation current path.....	10
12	Proof test .....	10

### 3 Ordering data

Description	Type	Order No.	Pcs. / Pkt.
Safe coupling relay for SIL3 high and low demand applications, connects digital output signals to the I/O, 2 enabling current paths, 2 alarm contacts, module for safe state off applications, integrated test pulse filter, plug-in screw connection, width: 17.5 mm	PSR-SCP- 24DC/FSP/2X1/1X2	2986960	1
Safe coupling relay for SIL3 high and low demand applications, connects digital output signals to the I/O, 2 enabling current paths, 1 alarm contact, module for safe state off applications, integrated test pulse filter, plug-in spring-cage connection, width: 17.5 mm	PSR-SPP- 24DC/FSP/2X1/1X2	2986957	1
Documentation	Type	Order No.	Pcs. / Pkt.
User manual, German, for applications for PSR safety relay	UM DE SAFETY RELAY APPLICATION	2888709	1

### 4 Technical data

Input data	
Nominal input voltage $U_N$	24 V DC
Input voltage range (factor)	0.85 ... 1.1
Typical input current	55 mA
Typical inrush current	max. 100 mA
Typical response time	50 ms
Typical release time	50 ms
Recovery time	1 s
Output data	
Contact type	2 undelayed enabling current paths 1 undelayed confirmation current path
Contact material	AgCuNi, + 0.2 $\mu$ m Au
Minimum switching voltage	15 V AC/DC
Maximum switching voltage	250 V AC/DC
Limiting continuous current	5 A (N/O contact)
Maximum inrush current	5 A
Inrush current, minimum	5 mA
Interrupting rating (ohmic load) max.	120 W (24 V DC, $\tau = 0$ ms, N/C contact: 2.4 W) 192 W (48 V DC, $\tau = 0$ ms, N/C contact: 4.8 W) 162 W (60 V DC, $\tau = 0$ ms, N/C contact: 6 W) 66 W (110 V DC, $\tau = 0$ ms, N/C contact: 11 W) 60 W (220 V DC, $\tau = 0$ ms, N/C contact: 22 W)
Maximum interrupting rating (inductive load)	72 W (24 V DC, $\tau = 40$ ms, N/C contact: 2.4 W) 43 W (48 V DC, $\tau = 40$ ms, N/C contact: 4.8 W) 41 W (60 V DC, $\tau = 40$ ms, N/C contact: 6 W) 35 W (110 V DC, $\tau = 40$ ms, N/C contact: 11 W) 48 W (220 V DC, $\tau = 40$ ms, N/C contact: 22 W)
Switching capacity min.	75 mW
Mechanical service life	Approx. $10^7$ cycles
Switching capacity (3600/h cycles)	5 A (24 V (DC13)) 5 A (230 V (AC15))
Output fuse	10 A gL/gG (N/O contact) 6 A gL/gG (N/C contact)

**General data**

Relay type	Electromechanically forcibly guided, dust-proof relay.
Nominal operating mode	100% operating factor
Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Mounting position	Any
Air and creepage distances between the power circuits	DIN EN 50178/VDE 0160
Rated surge voltage / insulation	6 kV / Safe isolation, increased insulation

**Connection data****Screw connection****Spring-cage conn.**

Conductor cross section, solid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section, stranded	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil	24 ... 12	24 ... 16
Stripping length	7 mm	8 mm

**Ambient conditions**

Ambient temperature (operation)	-20 °C ... 55 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Max. permissible relative humidity (operation)	75 %
Max. permissible humidity (storage/transport)	≤ 75 % (Condensation and icing are not permitted based on the average annual temperature)

**Certification / Approvals**

Approvals	
-----------	--

**Safety data**

Stop category according to IEC 60204	0
--------------------------------------	---

**Safety parameters for IEC 61508 - High demand**

SIL	3
PFH <sub>d</sub>	2.02 x 10 <sup>-11</sup>
Diagnostic coverage (DC)	99 %
MTTF <sub>d</sub>	5653071.2 Years
Demand rate	< 12 Months
Proof test interval	240 Months

**The specifications apply assuming the following calculation basis**

d <sub>op</sub>	365 Days
h <sub>op</sub>	24 h
t <sub>Cycle</sub>	3600 s

**Alternative illustration of the device as 1001 structure for process customers**

Equipment type	Type A
HFT	0
SIL	3
Safe Failure Fraction (SFF)	99.99 %
λ <sub>SD</sub>	198 FIT
λ <sub>SU</sub>	63.9 FIT
λ <sub>DD</sub>	3.66 FIT
λ <sub>DU</sub>	0.02 FIT

**Alternative illustration of the device as 1001 structure for process customers**

$\lambda_{\text{Total}}$	264.38 FIT
MTBF	342 Years
PFH	$2.02 \times 10^{-11}$

**Safety parameters for IEC 61508 - Low demand**

SIL	3
Diagnostic coverage (DC)	0 %
$\text{MTTF}_d$	22981.55 Years
$\text{PFD}_{\text{avg}}$	$1.76 \times 10^{-6}$
Proof test interval	60 Months

**Alternative illustration of the device as 1001 structure for process customers**

Equipment type	Type A
HFT	0
SIL	3
Safe Failure Fraction (SFF)	99.76 %
$\lambda_{\text{SD}}$	0 FIT
$\lambda_{\text{SU}}$	1026.9 FIT
$\lambda_{\text{DD}}$	0 FIT
$\lambda_{\text{DU}}$	2.42 FIT
$\lambda_{\text{Total}}$	1029.32 FIT
MTBF	104 Years
$\text{PFD}_{\text{avg}}$	$1.06 \times 10^{-5}$ (For $T_1 = 1$ year)

**Safety characteristic data according to EN ISO 13849**

Category	4
Performance level	e
$\text{MTTF}_d$	1140 Years
$d_{\text{op}}$	365 Days
$h_{\text{op}}$	24 h
$t_{\text{Cycle}}$	3600 s

## 5 Basic circuit diagram

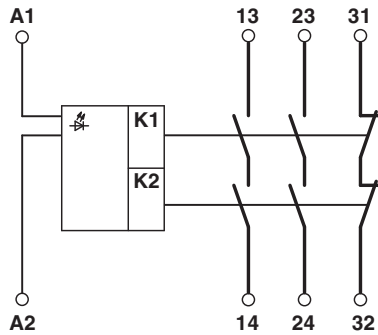


Figure 1 Block diagram

## 6 Derating

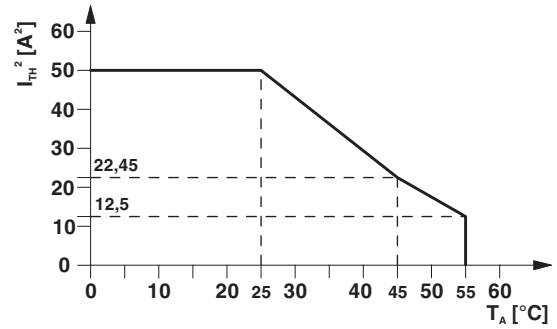


Figure 2 Derating curve

Designation	Explanation
A1/A2	Safety relay input voltage
13/14	Load current path 1
23/24	Load current path 2
31/32	Confirmation path

7 Load curve - resistive load

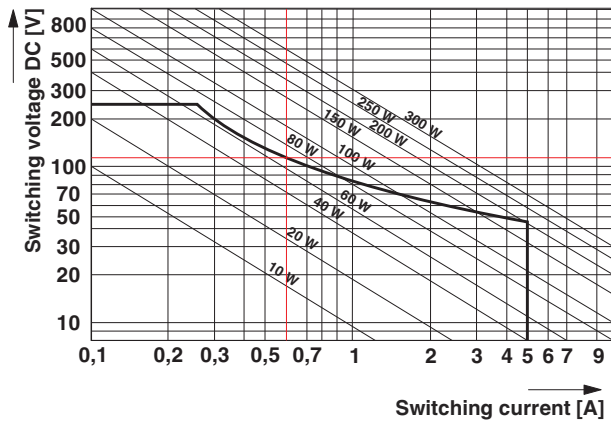


Figure 3 resistive load

8 Load curve - inductive load

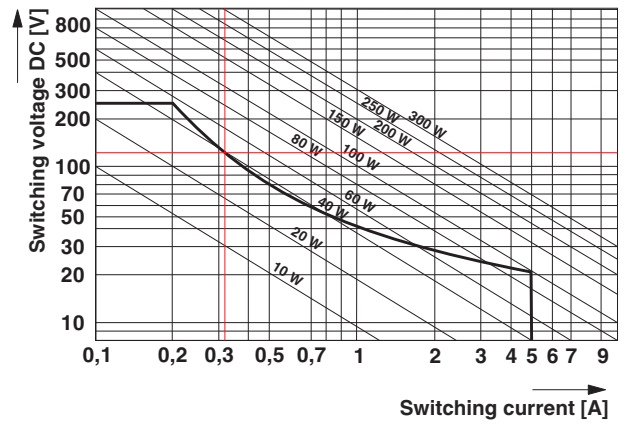


Figure 4 inductive load

## 9 Safety notes



### **WARNING: Risk of electric shock**

During operation, parts of electrical switching devices carry hazardous voltages.

Before working on the switching device, disconnect the power.

Please observe the safety regulations of electrical engineering and industrial safety and liability associations.

Disregarding these safety regulations may result in death, serious personal injury or damage to equipment.

Startup, mounting, modifications, and upgrades should only be carried out by a skilled electrical engineer!



### **WARNING: Risk of automatic machine restart!**

For emergency stop applications, the machine must be prevented from restarting automatically by a higher-level control system.

Protective covers must not be removed when operating electrical switching devices.



### **WARNING: Danger due to faulty devices!**

The devices may be damaged following an error and correct operation can no longer be ensured.

In the event of an error, replace the device immediately.

Repairs to the device, especially if the housing must be opened, may only be carried out by the manufacturer or authorized persons. Otherwise the warranty is invalidated.



### **NOTE: Risk of damage to equipment due to incorrect installation**

For reliable operation, the safety relay must be installed in housing protected from dust and humidity (IP54).

Carry out wiring according to the application. Refer to the "Application examples" section for this.



### **NOTE: Risk of damage to equipment due to noise emissions**

When operating relay modules the operator must meet the requirements for noise emission for electrical and electronic equipment (EN 61000-6-4) on the contact side and, if required, take appropriate measures.



### **NOTE: Module damage due to polarity reversal**

Polarity reversal places a burden on the electronics and can damage the module.

With resistance monitoring, an error is indicated to the higher-level controller.

Always connect the supply voltage as follows:

A1 to + 24 V

A2 to GND



## 10 Pin assignment

### Operating and indication element

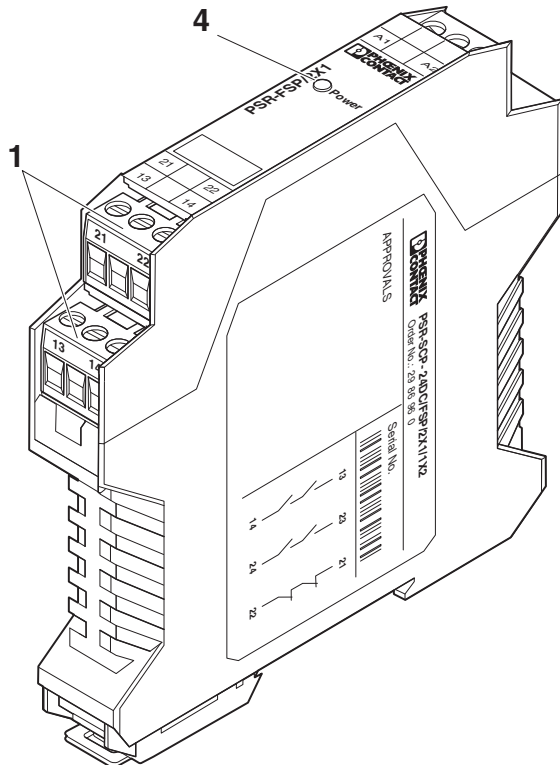


Figure 5 PSR-SCP- 24DC/FSP/2X1/1X2

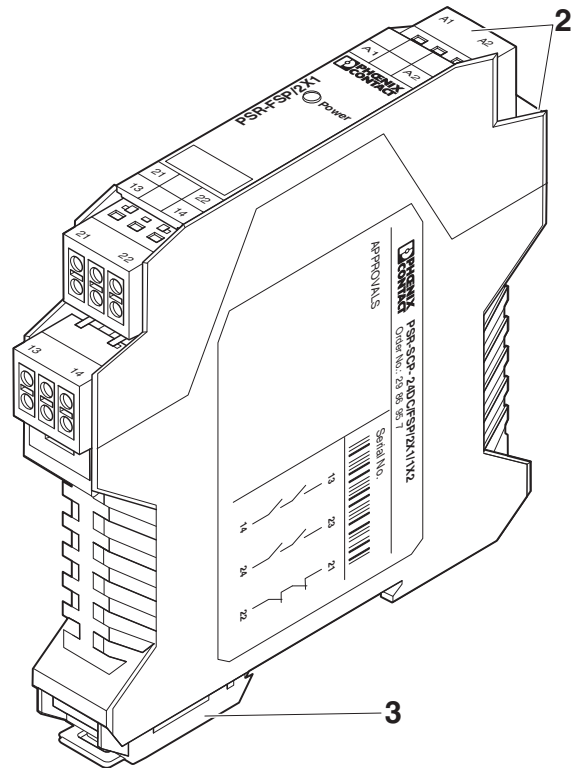



Figure 6 PSR-SPP- 24DC/FSP/2X1/1X2

Designation	Explanation
1	COMBICON plug-in screw terminal blocks
2	COMBICON plug-in spring-cage terminal blocks
3	Metal lock for mounting on the DIN rail
4	LED status indicator, green - Power

## 11 Application examples

### 11.1 Single-channel connection with integration of the confirmation current path

Single-channel connection with confirmation current path 31/32 integrated in the safety controller, suitable for high-demand applications up to safety category 4/PLe, SIL 3/SILCL 3 (with error prevention and external evaluation of the alarm contact)

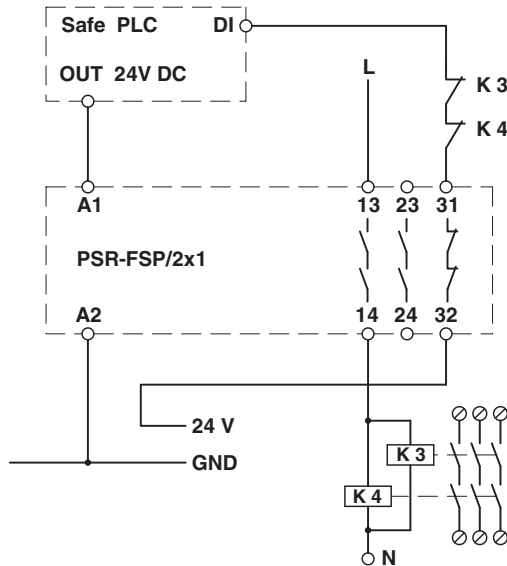

## 12 Proof test

To verify that the emergency stop coupling relay function is operating correctly, reset it and perform a continuity test for confirmation current path (connection terminal blocks 31/32).



### NOTE: Malfunction

In the event of a faulty continuity test, correct function of the emergency stop coupling relay is no longer possible.

The emergency stop coupling relay must be replaced immediately.