

## Up to PL e of EN ISO 13849-1 PNOZ X2.7P



Safety relay for monitoring E-STOP pushbuttons, safety gates and light beam devices

### Approvals

| PNOZ X2.7P |   |
|------------|---|
|            | ◆ |
|            | ◆ |
|            | ◆ |

### Unit features

- ▶ Positive-guided relay outputs:
  - 3 safety contacts (N/O), instantaneous
  - 1 auxiliary contact (N/C), instantaneous
- ▶ Connection options for:
  - E-STOP pushbutton
  - Safety gate limit switch
  - Reset button
  - Light barriers
- ▶ LED indicator for:
  - Switch status channel 1/2
  - Supply voltage
- ▶ Plug-in connection terminals (either spring-loaded terminal or screw terminal)
- ▶ See order reference for unit types

### Safety features


- The relay meets the following safety requirements:
- ▶ The circuit is redundant with built-in self-monitoring.
  - ▶ The safety function remains effective in the case of a component failure.
  - ▶ The correct opening and closing of the safety function relays is tested automatically in each on-off cycle.

### Unit description

The safety relay meets the requirements of EN 60947-5-1, EN 60204-1 and VDE 0113-1 and may be used in applications with

- ▶ E-STOP pushbuttons
- ▶ Safety gates
- ▶ Light beam devices

### Block diagram

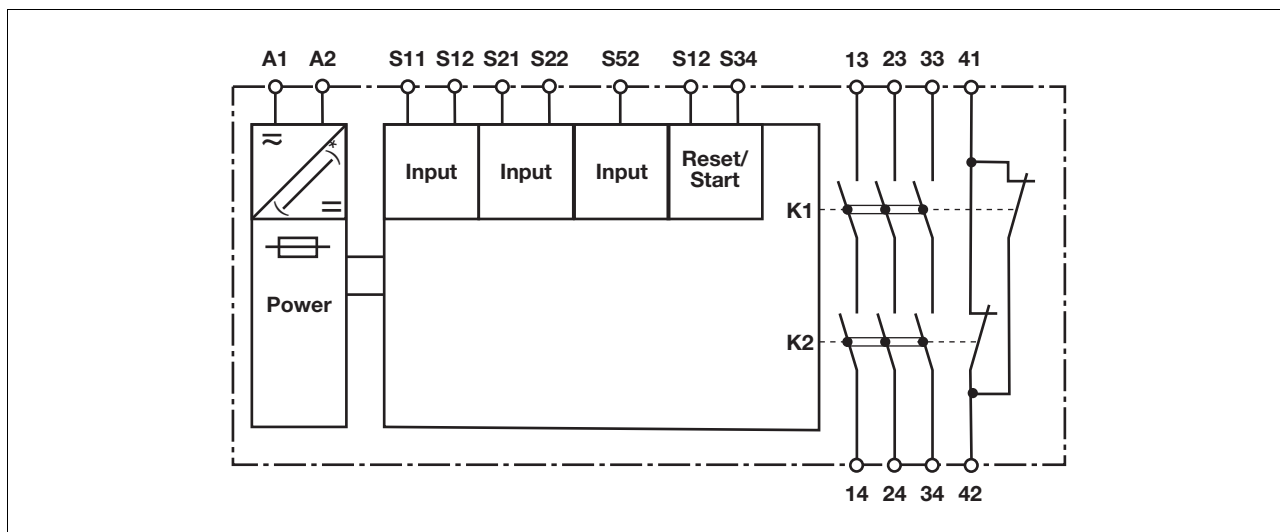


\*only with  $U_B$  24 – 240 VAC/DC

## Up to PL e of EN ISO 13849-1 PNOZ X2.7P

### Function description

- ▶ Single-channel operation: no redundancy in the input circuit, earth faults in the reset circuit are detected.
- ▶ Dual-channel operation without detection of shorts across contacts: redundant input circuit, detects
  - earth faults in the reset and input circuit,
  - short circuits in the input circuit and, with a monitored reset, in the reset circuit too,
- ▶ Dual-channel operation with detection of shorts across contacts: redundant input circuit, detects
  - earth faults in the reset and input circuit,
  - short circuits in the input circuit and, with a monitored reset, in the reset circuit too,
- shorts between contacts in the input circuit.
- ▶ Monitored reset: Unit is active once the input circuit is closed and once the reset circuit is closed after the waiting period has elapsed (see technical details).
- ▶ Increase in the number of available instantaneous safety contacts by connecting contact expansion modules or external contactors.

### Timing diagram

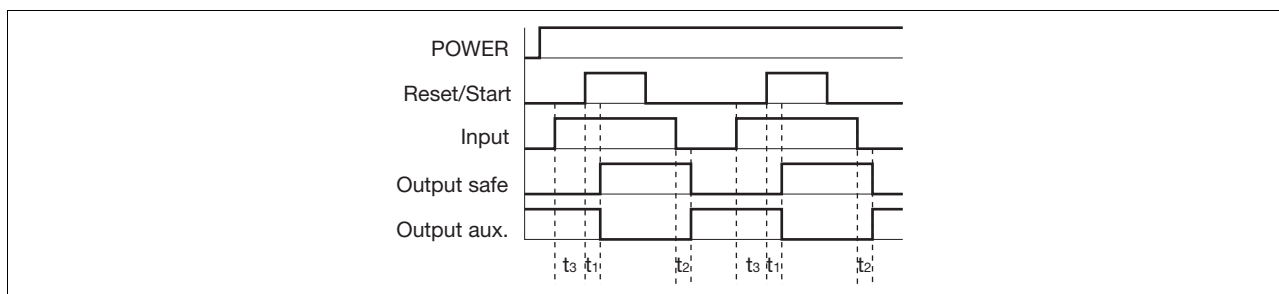

### Key

- ▶ Power: Supply voltage
- ▶ Reset/start: Reset circuit S12-S34
- ▶ Input: Input circuits S11-S12, S21-S22, S52
- ▶ Output safe: Safety contacts 13-14, 23-24, 33-34
- ▶ Output aux: Auxiliary contacts 41-42
- ▶  $t_1$ : Switch-on delay
- ▶  $t_2$ : Delay-on de-energisation
- ▶  $t_3$ : Waiting period

### Wiring

Please note:

- ▶ Information given in the “Technical details” must be followed.
- ▶ Outputs 13-14, 23-24, 33-34 are safety contacts, output 41-42 is an auxiliary contact (e.g. for display).
- ▶ To prevent contact welding, a fuse should be connected before the output contacts (see technical details).
- ▶ Calculation of the max. cable runs  $l_{max}$  in the input circuit:

$$l_{max} = \frac{R_{lmax}}{R_l / km}$$

$R_{lmax}$  = max. overall cable resistance (see technical details)

$R_l / km$  = cable resistance/km

- ▶ Use copper wire that can withstand 60/75 °C.
- ▶ Sufficient fuse protection must be provided on all output contacts with capacitive and inductive loads.

## Up to PL e of EN ISO 13849-1 PNOZ X2.7P

### Preparing for operation

► Supply voltage

| Supply voltage | 24 – 240 VAC/DC | 24 VAC/DC |
|----------------|-----------------|-----------|
|                |                 |           |

► Input circuit

| Input circuit   | Single-channel | Dual-channel |
|---|----------------|--------------|
| E-STOP<br><b>without</b> detection of shorts across contacts  |                |              |
| E-STOP<br><b>with</b> detection of shorts across contacts   |                |              |
| Safety gate<br><b>without</b> detection of shorts across contacts   |                |              |
| Safety gate<br><b>with</b> detection of shorts across contacts  |                |              |
| Light beam device<br><b>with</b> detection of shorts across contacts via ESPE<br>(not on units with a universal power supply) |                |              |

## Up to PL e of EN ISO 13849-1 PNOZ X2.7P

### ▶ Reset circuit

| Reset circuit   | E-STOP wiring (single-channel)<br>Safety gate (single-channel) | E-STOP wiring (dual-channel)<br>Safety gate (dual-channel) |
|-----------------|--|--|
| Monitored reset |  |  |

### ▶ Feedback circuit


| Feedback circuit                  | Automatic reset | Monitored reset |
|-----------------------------------|-----------------|-----------------|
| Contacts from external contactors |                 |                 |

### ▶ Key

|       |                           |
|-------|---------------------------|
| S1/S2 | E-STOP/safety gate switch |
| S3    | Reset button              |
|       | Switch operated           |
|       | Gate open                 |
|       | Gate closed               |

## Up to PL e of EN ISO 13849-1 PNOZ X2.7P

### Terminal configuration

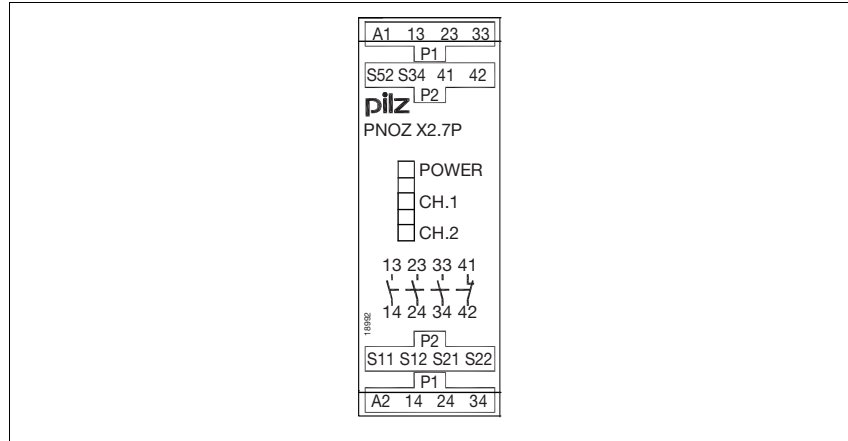


### Installation

- ▶ The safety relay should be installed in a control cabinet with a protection type of at least IP54.
- ▶ Use the notch on the rear of the unit to attach it to a DIN rail.
- ▶ Ensure the unit is mounted securely on a vertical DIN rail (35 mm) by using a fixing element (e.g. retaining bracket or an end angle).

### Dimensions

\* with spring-loaded terminals

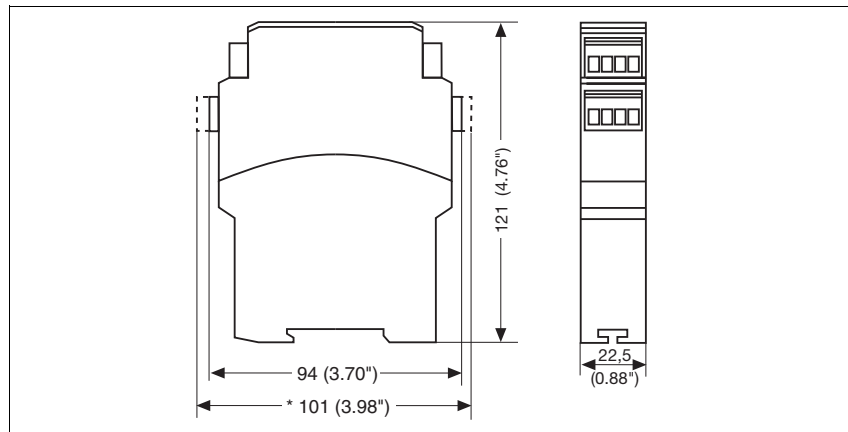

## Up to PL e of EN ISO 13849-1 PNOZ X2.7P

### Notice


This data sheet is only intended for use during configuration. For installation and operation, please refer to the operating instructions supplied with the unit.

### Service life graph

The service life graphs indicate the number of cycles from which failures due to wear must be expected. The

wear is mainly caused by the electrical load; the mechanical load is negligible.

$U_B$  24 V AC/DC

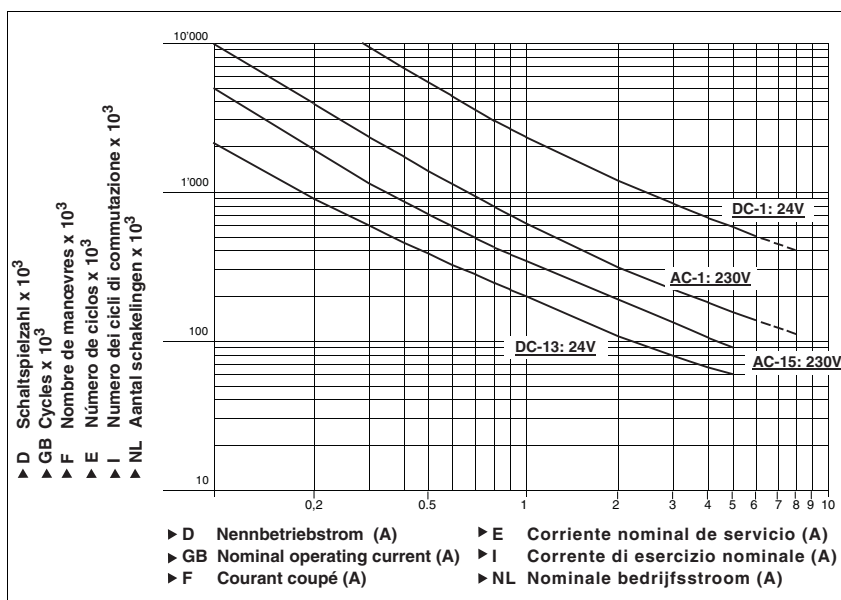

### Example


- ▶ Inductive load: 0,2 A
- ▶ Utilisation category: AC15
- ▶ Contact service life: 2,000,000 cycles

Provided the application requires fewer than 2,000,000 cycles, the PFH value (see technical details) can be used in the calculation.

To increase the service life, sufficient spark suppression must be provided on all output contacts. With capacitive loads, any power surges that occur must be noted. With contactors, use freewheel diodes for spark suppression.

## Up to PL e of EN ISO 13849-1 PNOZ X2.7P

U<sub>B</sub> 24 - 240 V AC/DC

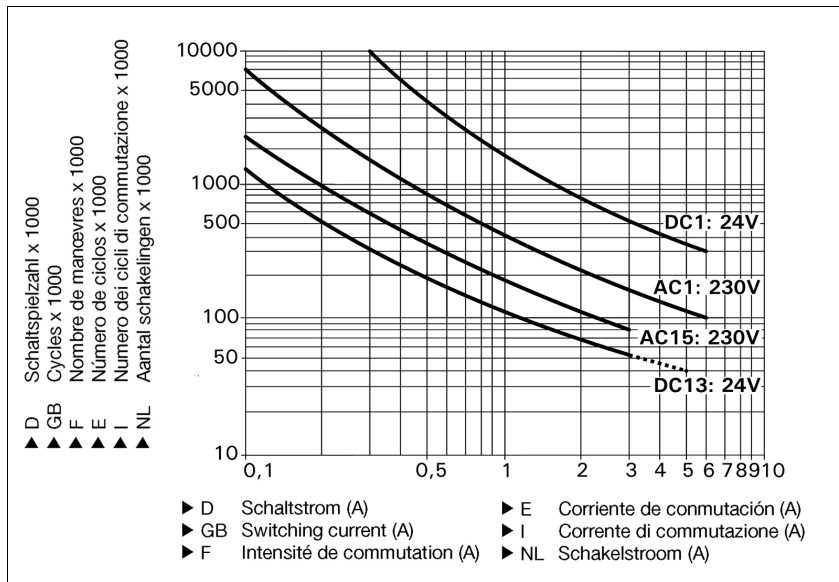

### Example

- ▶ Inductive load: 0,2 A
- ▶ Utilisation category: AC15
- ▶ Contact service life: 1,000,000 cycles

Provided the application requires fewer than 1,000,000 cycles, the PFH value (see technical details) can be used in the calculation.

To increase the service life, sufficient spark suppression must be provided on all output contacts. With capacitive loads, any power surges that occur must be noted. With contactors, use freewheel diodes for spark suppression.

### Technical details

#### Electrical data

|  |  |
|--|--|
| Supply voltage                         |  |
| Supply voltage U <sub>B</sub> AC/DC    | <b>24 - 240 V, 24 V</b>  |
| Voltage tolerance                      | <b>-15 %/+10 %</b>   |
| Power consumption at U <sub>B</sub> AC | <b>4.5 VA</b> No. 777306, 787306<br><b>5.5 VA</b> No. 777305, 787305   |
| Power consumption at U <sub>B</sub> DC | <b>2.0 W</b> No. 777306, 787306<br><b>2.5 W</b> No. 777305, 787305     |
| Frequency range AC                     | <b>50 - 60 Hz</b>  |
| Residual ripple DC                     | <b>160 %</b>   |
| Voltage and current at                 |  |
| Input circuit DC: <b>24.0 V</b>        | <b>25.0 mA</b> No. 777306, 787306<br><b>30.0 mA</b> No. 777305, 787305 |
| Reset circuit DC: <b>24.0 V</b>        | <b>40.0 mA</b> No. 777305, 787305<br><b>50.0 mA</b> No. 777306, 787306 |
| Feedback loop DC: <b>24.0 V</b>        | <b>40.0 mA</b> No. 777305, 787305<br><b>50.0 mA</b> No. 777306, 787306 |
| Number of output contacts              |  |
| Safety contacts (S) instantaneous:     | <b>3</b>   |
| Auxiliary contacts (N/C):              | <b>1</b>   |

## Up to PL e of EN ISO 13849-1 PNOZ X2.7P

| <b>Electrical data</b>  |   |
|---|---|
| Utilisation category in accordance with <b>EN 60947-4-1</b>                 |   |
| Safety contacts: AC1 at <b>240 V</b>  | $I_{\min}$ : <b>0.01 A</b> , $I_{\max}$ : <b>6.0 A</b><br>$P_{\max}$ : <b>1500 VA</b> |
| Safety contacts: DC1 at <b>24 V</b>   | $I_{\min}$ : <b>0.01 A</b> , $I_{\max}$ : <b>6.0 A</b><br>$P_{\max}$ : <b>150 W</b>   |
| Auxiliary contacts: AC1 at <b>240 V</b>                                     | $I_{\min}$ : <b>0.01 A</b> , $I_{\max}$ : <b>6.0 A</b><br>$P_{\max}$ : <b>1500 VA</b> |
| Auxiliary contacts: DC1 at <b>24 V</b>                                      | $I_{\min}$ : <b>0.01 A</b> , $I_{\max}$ : <b>6.0 A</b><br>$P_{\max}$ : <b>150 W</b>   |
| Utilisation category in accordance with <b>EN 60947-5-1</b>                 |   |
| Safety contacts: AC15 at <b>230 V</b>                                       | $I_{\max}$ : <b>3.0 A</b> No. 777306, 787306<br><b>5.0 A</b> No. 777305, 787305       |
| Safety contacts: DC13 at <b>24 V</b> (6 cycles/min)                         | $I_{\max}$ : <b>4.0 A</b> No. 777306, 787306<br><b>5.0 A</b> No. 777305, 787305       |
| Auxiliary contacts: AC15 at <b>230 V</b>                                    | $I_{\max}$ : <b>3.0 A</b> No. 777306, 787306<br><b>5.0 A</b> No. 777305, 787305       |
| Auxiliary contacts: DC13 at <b>24 V</b> (6 cycles/min)                      | $I_{\max}$ : <b>4.0 A</b> No. 777306, 787306<br><b>5.0 A</b> No. 777305, 787305       |
| Contact material  | <b>AgCuNi + 0.2 µm Au</b>   |
| External contact fuse protection ( $I_k = 1$ kA) to <b>EN 60947-5-1</b>     |   |
| Blow-out fuse, quick  |   |
| Safety contacts:  | <b>10 A</b> No. 777305, 787305<br><b>6 A</b> No. 777306, 787306                       |
| Auxiliary contacts:   | <b>10 A</b> No. 777305, 787305<br><b>6 A</b> No. 777306, 787306                       |
| Blow-out fuse, slow   |   |
| Safety contacts:  | <b>4 A</b> No. 777306, 787306<br><b>6 A</b> No. 777305, 787305                        |
| Auxiliary contacts:   | <b>4 A</b> No. 777306, 787306<br><b>6 A</b> No. 777305, 787305                        |
| Circuit breaker 24 VAC/DC, characteristic B/C                               |   |
| Safety contacts:  | <b>4 A</b> No. 777306, 787306<br><b>6 A</b> No. 777305, 787305                        |
| Auxiliary contacts:   | <b>4 A</b> No. 777306, 787306<br><b>6 A</b> No. 777305, 787305                        |
| Max. overall cable resistance $R_{l\max}$<br>input circuits, reset circuits |   |
| single-channel at $U_B$ DC  | <b>30 Ohm</b> No. 777305, 787305<br><b>45 Ohm</b> No. 777306, 787306                  |
| single-channel at $U_B$ AC  | <b>100 Ohm</b> No. 777305, 787305<br><b>45 Ohm</b> No. 777306, 787306                 |
| dual-channel without detect. of shorts across contacts at $U_B$ DC          | <b>50 Ohm</b> No. 777305, 787305<br><b>80 Ohm</b> No. 777306, 787306                  |
| dual-channel without detect. of shorts across contacts at $U_B$ AC          | <b>100 Ohm</b> No. 777305, 787305<br><b>80 Ohm</b> No. 777306, 787306                 |
| dual-channel with detect. of shorts across contacts at $U_B$ DC             | <b>15 Ohm</b>   |
| dual-channel with detect. of shorts across contacts at $U_B$ AC             | <b>15 Ohm</b>   |
| Min. input resistance when switching on                                     | <b>141 Ohm</b> No. 777306, 787306<br><b>71 Ohm</b> No. 777305, 787305                 |
| <b>Safety-related characteristic data</b>                                   |   |
| PL in accordance with <b>EN ISO 13849-1: 2006</b>                           | <b>PL e (Cat. 4)</b>  |
| Category in accordance with <b>EN 954-1</b>                                 | <b>Cat. 4</b>   |
| SIL CL in accordance with <b>EN IEC 62061</b>                               | <b>SIL CL 3</b>   |
| PFH in accordance with <b>EN IEC 62061</b>                                  | <b>2.31E-09</b>   |
| SIL in accordance with <b>IEC 61511</b>                                     | <b>SIL 3</b>  |
| PFH in accordance with <b>IEC 61511</b>                                     | <b>2.03E-06</b>   |
| $T_M$ [year] in accordance with <b>EN ISO 13849-1: 2006</b>                 | <b>20</b>   |



## Up to PL e of EN ISO 13849-1 PNOZ X2.7P

| Times   |   |
|---|---|
| Switch-on delay   |   |
| on monitored reset with rising edge typ.  | <b>30 ms</b>  |
| on monitored reset with rising edge max.  | <b>40 ms</b> No. 777306, 787306                                   |
|   | <b>50 ms</b> No. 777305, 787305                                   |
| Delay-on de-energisation  |   |
| with E-STOP typ.  | <b>10 ms</b> No. 777306, 787306                                   |
|   | <b>15 ms</b> No. 777305, 787305                                   |
| with E-STOP max.  | <b>20 ms</b> No. 777306, 787306                                   |
|   | <b>30 ms</b> No. 777305, 787305                                   |
| with power failure typ.   | <b>60 ms</b> No. 777305, 787305                                   |
| with power failure max.   | <b>100 ms</b> No. 777305, 787305                                  |
| with power failure typ. $U_B$ AC/DC: <b>24 V</b> No. 777306, 787306                                       | <b>180 ms</b> No. 777306, 787306                                  |
| with power failure max. $U_B$ AC/DC: <b>24 V</b> No. 777306, 787306                                       | <b>230 ms</b> No. 777306, 787306                                  |
| with power failure typ. $U_B$ AC : <b>240 V</b>   | <b>1,100 ms</b> No. 777306, 787306                                |
| with power failure max. $U_B$ AC : <b>240 V</b>   | <b>1500 ms</b> No. 777306, 787306                                 |
| Recovery time at max. switching frequency 1/s   |   |
| after E-STOP  | <b>50 ms</b>  |
| after power failure   | <b>200 ms</b> No. 777305, 787305                                  |
|   | <b>250 ms</b> No. 777306, 787306                                  |
| after power failure on universal power supply   | <b>1500 ms</b> No. 777306, 787306                                 |
| Waiting period with a monitored reset   |   |
| with rising edge  | <b>250 ms</b> No. 777305, 787305                                  |
|   | <b>300 ms</b> No. 777306, 787306                                  |
| Min. start pulse duration with a monitored reset  |   |
| with rising edge  | <b>30 ms</b>  |
| Simultaneity, channel 1 and 2   | $\infty$  |
| Supply interruption before de-energisation  | <b>20 ms</b>  |
| Environmental data  |   |
| EMC   | <b>EN 60947-5-1, EN 61000-6-2, EN 61000-6-4</b>                   |
| Vibration to <b>EN 60068-2-6</b>  |   |
| Frequency   | <b>10 - 55 Hz</b>   |
| Amplitude   | <b>0.35 mm</b>  |
| Climatic suitability  | <b>EN 60068-2-78</b>  |
| Airgap creepage in accordance with <b>EN 60947-1</b>  |   |
| Pollution degree  | <b>2</b>  |
| Overvoltage category  | <b>III / II</b>   |
| Rated insulation voltage  | <b>250 V</b>  |
| Rated impulse withstand voltage   | <b>4.00 kV</b>  |
| Ambient temperature   | <b>-10 - 55 °C</b> No. 777306, 787306                             |
|   | <b>-35 - 55 °C</b> No. 777305, 787305                             |
| Storage temperature   | <b>-40 - 85 °C</b>  |
| Protection type   |   |
| Mounting (e.g. cabinet)   | <b>IP54</b>   |
| Housing   | <b>IP40</b>   |
| Terminals   | <b>IP20</b>   |
| Mechanical data   |   |
| Housing material  |   |
| Housing   | <b>PPO UL 94 V0</b>   |
| Front   | <b>ABS UL 94 V0</b>   |
| Cross section of external conductors with screw terminals   |   |
| 1 core flexible   | <b>0.25 - 2.50 mm<sup>2</sup>, 24 - 12 AWG</b> No. 777305, 777306 |
| 2 core, same cross section, flexible:   |   |
| with crimp connectors, without insulating sleeve  | <b>0.25 - 1.00 mm<sup>2</sup>, 24 - 16 AWG</b> No. 777305, 777306 |
| without crimp connectors or with TWIN crimp connectors  | <b>0.20 - 1.50 mm<sup>2</sup>, 24 - 16 AWG</b> No. 777305, 777306 |
| Torque setting with screw terminals   | <b>0.50 Nm</b> No. 777305, 777306                                 |
| Cross section of external conductors with spring-loaded terminals: Flexible with/without crimp connectors | <b>0.20 - 1.50 mm<sup>2</sup>, 24 - 16 AWG</b> No. 787305, 787306 |

## Up to PL e of EN ISO 13849-1 PNOZ X2.7P

### Mechanical data

|   |   |
|---|---|
| Spring-loaded terminals: Terminal points per connection | <b>2</b> No. 787305, 787306   |
| Stripping length  | <b>8 mm</b> No. 787305, 787306  |
| Dimensions  |   |
| Height  | <b>101.0 mm</b> No. 787305, 787306<br><b>94.0 mm</b> No. 777305, 777306               |
| Width   | <b>22.5 mm</b>  |
| Depth   | <b>121.0 mm</b>   |
| Weight  |   |
|   | <b>190 g</b> No. 777305, 787305<br><b>205 g</b> No. 787306<br><b>210 g</b> No. 777306 |

No. stands for order number.

It is essential to consider the relay's service life graphs. The relay outputs' safety-related characteristic data is only valid if the values in the service life graphs are met.

The PFH value depends on the switching frequency and the load on the relay output.  
If the service life graphs are not accessible, the stated PFH value can be

used irrespective of the switching frequency and the load, as the PFH value already considers the relay's B10d value as well as the failure rates of the other components.

All the units used within a safety function must be considered when calculating the safety characteristic data.

The standards current on **2009-12** apply.

### Conventional thermal current

| Number of contacts | $I_{th}$ (A) at $U_B$ DC   | $I_{th}$ (A) at $U_B$ AC   |
|--------------------|--|--|
| 1                  | <b>6.00 A</b>  | <b>6.00 A</b>  |
| 2                  | <b>6.00 A</b>  | <b>4.00 A</b> No. 777305, 787305<br><b>6.00 A</b> No. 777306, 787306 |
| 3                  | <b>4.50 A</b> No. 777306, 787306<br><b>5.00 A</b> No. 777305, 787305 | <b>3.50 A</b> No. 777305, 787305<br><b>4.50 A</b> No. 777306, 787306 |

### Order reference

| Type         | Features                  | Terminals               | Order no. |
|--------------|---------------------------|-------------------------|-----------|
| PNOZ X2.7P C | 24 VAC 24 VDC             | Spring-loaded terminals | 787 305   |
| PNOZ X2.7P   | 24 VAC 24 VDC             | Screw terminals         | 777 305   |
| PNOZ X2.7P C | 24 - 240 VAC 24 - 240 VDC | Spring-loaded terminals | 787 306   |
| PNOZ X2.7P   | 24 - 240 VAC 24 - 240 VDC | Screw terminals         | 777 306   |