




3-phase common link PKZM0..w/o aux.cont.



Powering Business Worldwide™

Part no. **B3.0/4-PKZ0**
Article no. **063960**

Delivery programme

			
Product range			Accessories
Accessories			Three-phase commoning link
			Protected against accidental contact, short-circuit proof, $U_e = 690\text{ V}$, $I_u = 63\text{ A}$ Can be extended by rotating by installation For PKZM0-... or PKE without side mounted auxiliary contacts or shunt releases
Circuit-breaker		Number	4
Length		mm	180
Unit width		mm	45
Notes			
For parallel power feed to several motor-protective circuit-breakers on terminals 1, 3, 5			

Approvals

Product Standards	UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking
UL File No.	E36332
UL CCN	NLRV
CSA File No.	98494
CSA Class No.	3211-06
NA Certification	UL listed, CSA certified
Specially designed for NA	No


Main conducting paths

Rated impulse withstand voltage	U_{imp}	V AC	6000
Overvoltage category/pollution degree			III/3
Rated operational voltage	U_e	V AC	690
Rated uninterrupted current	I_u	A	63

Technical data ETIM 4.0

Insulated			YES
Number of phases			3
Cross-section		mm ²	0
Rated uninterrupted current I_u		A	63
Length		mm	180
Rated conditional short-circuit current I_q		kA	0
Rated impulse voltage		kV	6
Design of electrical connection			Fork connector
Rated short-time withstand current I_{cw}		kA	0
Suitable for devices with auxiliary contacts			No
Suitable for devices with neutral pole			No
Suitable for number of devices			2
Max. rated operating voltage U_e		V	690
Unit width		mm	45

Dimensions

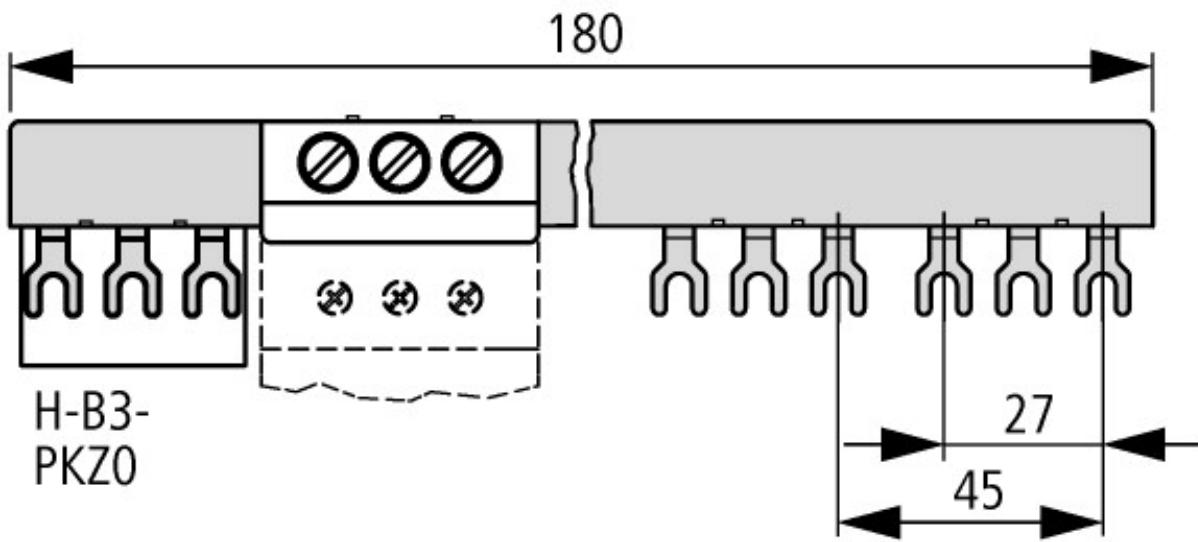

Three-phase commoning link

Additional product information (links)

AWA1210-2295 Three-phase commoning link

AWA1210-2295 Three-phase commoning link	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/22950506.pdf
Motor starters and "Special Purpose Ratings" for the North American market	http://www.moeller.net/binary/ver_techpapers/ver953en.pdf
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf