


Distribution panel system CombiLine-M

Module for terminals horizontal

The mounting frame must be ordered separately

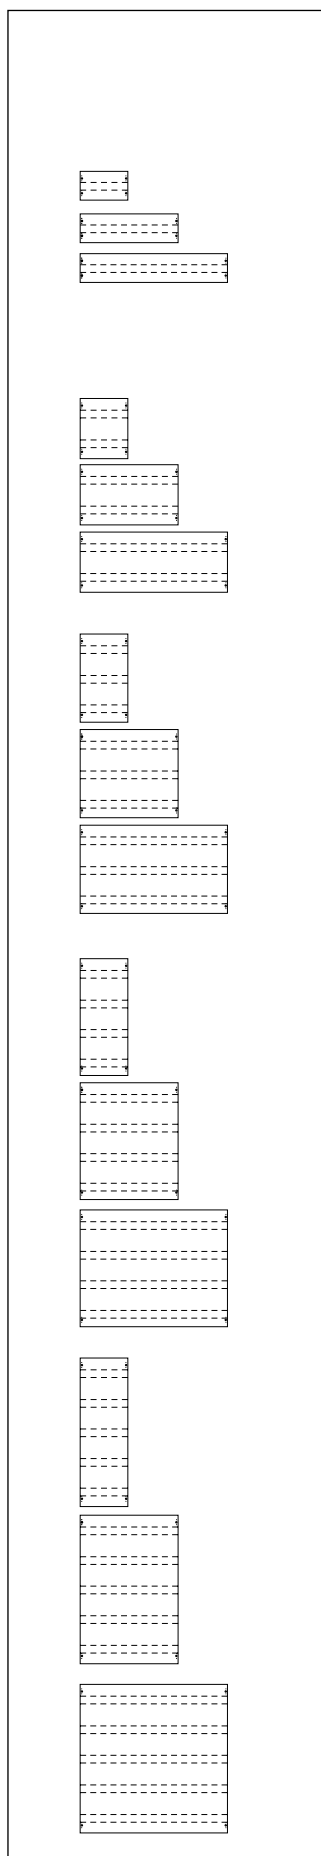

With DIN rails 35 x 15 mm on deep-mounting brackets (steplessly adjustable / see note below) For earthed or double insulated assembly \perp \square				EDF*1	WR*2	Minimum cabinet depth	FLATPACK*3 Not mounted	MOUNTED Installed in the cabinet		
GU	Height	Width	SU				Type	Ord.no.*4	Type	Ord.no.*4
1	150 mm	250 mm	12	■		120 mm	MBK106K*	41632	MK106K*	41112
	150 mm	250 mm	12	■	■	200 mm	MBK106	41677	MK106	41227
	150 mm	500 mm	24	■		120 mm	MBK206K*	41633	MK206K*	41113
	150 mm	500 mm	24	■	■	200 mm	MBK206	41679	MK206	41228
	150 mm	750 mm	36	■	■	200 mm	MBK306	41681	MK306	41229
2	300 mm	250 mm	24	■		120 mm	MBK107K*	41634	MK107K*	41114
	300 mm	250 mm	24	■	■	200 mm	MBK107	41683	MK107	41230
	300 mm	500 mm	48	■		120 mm	MBK207K*	41635	MK207K*	41115
	300 mm	500 mm	48	■	■	200 mm	MBK207	41685	MK207	41231
	300 mm	750 mm	72	■	■	200 mm	MBK307	41687	MK307	41232
3	450 mm	250 mm	36	■		120 mm	MBK108K*	41636	MK108K*	41116
	450 mm	250 mm	36	■	■	200 mm	MBK108	41689	MK108	41233
	450 mm	500 mm	72	■	■	200 mm	MBK208	41691	MK208	41234
	450 mm	750 mm	108	■	■	200 mm	MBK308	41693	MK308	41235
4	600 mm	250 mm	48	■	■	200 mm	MBK109	41695	MK109	41236
	600 mm	500 mm	96	■	■	200 mm	MBK209	41697	MK209	41237
	600 mm	750 mm	144	■	■	200 mm	MBK309	41699	MK309	41238
5	750 mm	250 mm	60	■	■	200 mm	MBK110	41701	MK110	41239
	750 mm	500 mm	120	■	■	200 mm	MBK210	41703	MK210	41240
	750 mm	750 mm	180	■	■	200 mm	MBK310	41705	MK310	41241

Note

The upper DIN rail is mounted with at least one pair of short deep-mounting brackets (ZW39P2).

Module design

- 1 GU: 1 X ZW39P2
- 2 GU: 1 X ZW39P2, 1 X ZW59P2
- 3 GU: 2 X ZW39P2, 1 X ZW59P2
- 4 GU: 2 X ZW39P2, 2 X ZW59P2
- 5 GU: 2 X ZW39P2, 3 X ZW59P2

➔ For mounting frames, see page 8/49

*1 ■ Module for EDF mounting frame *2 ■ Module for WR mounting frame *3 Earthed as delivered, except for MBK...K modules
Only double insulated \square design is possible.