

I(G)/SVB main switch

Part no. T5-4-15682/I5/SVB-SW

207282 Article no.





1/4

IP 65

IP 65

Delivery programme					
			Without Emergency-Stop function		
			With auxiliary contacts		
Contact sequence					
Main conducting paths					
No. of poles		М	6		
Auxiliary contacts					
		N/0	1		
		В	1		
Max. motor rating					
AC-23A					
400/415 V 50-60 Hz	P	kW	30		
Rated uninterrupted current	<i>I</i> <sub>u</sub>	Α	100		
Design			Surface mounting		
Note for table headerWith black rotary handle and locking collar, lockable in the 0 position					

General			
Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL Switch-disconnectors to IEC/EN 60947-3 Load-break switches to IEC/EN 60947-3
Lifespan, mechanical	Operations	× 10 <sup>6</sup>	0.5
Maximum operating frequency	Operations/h		3000
Climatic proofing			Damp heat, constant, to IEC 60068-2-78; Damp heat, cyclical, to IEC 60068-2-30
Ambient temperature		°C	
Open		°C	- 25 50
Enclosed		°C	- 25 40
Mounting position			As required
Mechanical shock resistance to IEC 60068-2-27	Half-sinusoidal shock 20 ms	g	> 15
Contacts			
Rated operational voltage	U <sub>e</sub>	V AC	690


Mounting position			As required
Mechanical shock resistance to IEC 60068-2-27	Half-sinusoidal shock 20 ms	g	>15
Contacts			
Rated operational voltage	<i>U</i> <sub>e</sub>	V AC	690
Rated impulse withstand voltage	$U_{\rm imp}$	V AC	6000
Overvoltage category/pollution degree			III/3
Rated uninterrupted current	<i>I</i> <sub>u</sub>	Α	
open	<i>I</i> <sub>u</sub>	Α	100
Enclosed	<i>I</i> <sub>u</sub>	Α	100
Load rating with intermittent operation, class 12			
AB 25 % DF		× I <sub>e</sub>	2
AB 40 % DF		× I <sub>e</sub>	1.6
AB 60 % DF		× I <sub>e</sub>	1.3
Short-circuit rating			
Fuse		A gG/gL	100
Rated short-time withstand current (1 s current)	I <sub>cw</sub>	A <sub>rms</sub>	1850

Safe isolation to VDE 0106 Part 101 and Part 101/A1			
between the contacts		V AC	440
Switching angles		0	90 60 45 30
Contact units			10
Double-break contacts			max. 20
Current heat loss per contact at $I_{\rm e}$		W	7.5
Terminal capacities			
Solid or stranded		mm <sup>2</sup>	1 × (2.5 – 35) 2 × (2.5 – 16)
Flexible with ferrule to DIN 46228		mm <sup>2</sup>	1 × (1.5 – 25) 2 × (1.5 – 10)
Terminal screw			M6
Tightening torque		Nm	4
Switching capacity			
AC		× U <sub>s</sub>	
Rated making capacity $\cos \phi = 0.35$		Α	950
Rated breaking capacity, motor load switch $\cos\phi$ = 0.35		Α	
230 V		Α	760
400 V		Α	740
500 V		Α	590
690 V		Α	420
Rated operational current 440 V load-break switch AC-21A	I <sub>e</sub>	Α	100
AC-23A Motor load switches (main switches maintenance switches)	Р	kW	
230 V	Р	kW	18.5
400 V	Р	kW	30
500 V	Р	kW	37
690 V	Р	kW	30
Rated operational current control switch AC-15			
230 V	l <sub>e</sub>	Α	16
400 V	I <sub>e</sub>	Α	6
500 V	I <sub>e</sub>	А	4
DC		× U <sub>s</sub>	
DC-1, Load-break switches L/R = 1 ms			
Rated operational current	<i>l</i> e	Α	80
Voltage per contact pair in series		V	60
Control circuit reliability at 24 V DC, 10 mA	Fault probability	H <sub>F</sub>	< 10 <sup>-5</sup> , < 1 fault in 100000 operations

## **Notes**

**Notes** For mechanical shock resistance: T3.../l....>12g Applies to T0(3).../SVB: isolating characteristics to IEC/EN 60947 *U*for rated operational voltage up to 500 V AC Applies to rated uninterrupted current  $I_0$  of the contact: with T5-4-8344/15 max. 95 A


To terminal capacity solid, stranded and flexible:
T0(3), (6), (8)...: Maximum of 2 cross-section sizes difference admissible between 2 conductors
T5(B)-...: Maximum of 1 cross-section size difference admissible between 2 conductors
For type T8-3-8342/... the following applies: switching angle = 90° and flat connection = 1 busbar 25 × 5 or 2 busbars 20 × 3

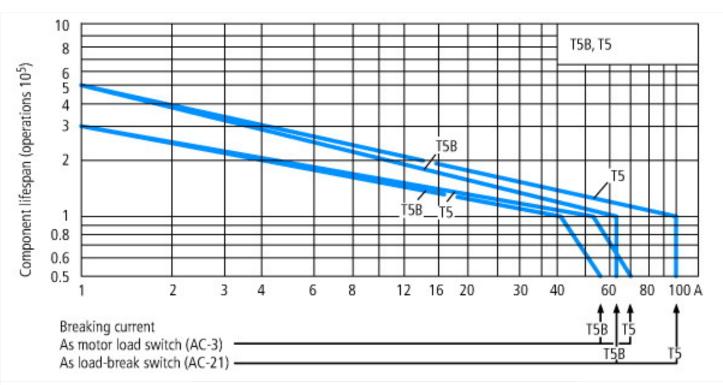


For utilisation category AC-4 (extreme load: 100 % inching, reversing or plugging)

The blocked rotor current of the motor should not exceed the rated current of the switch for AC-21A to ensure a reasonable device lifespan.

## **Dimensions**

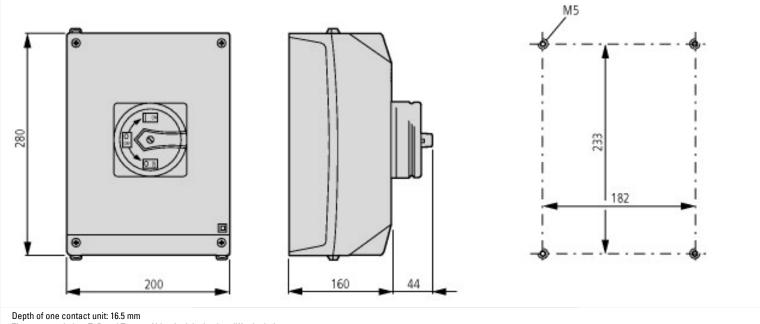

The rotary switches T5B and T5 are of identical design but differ in their contacts.

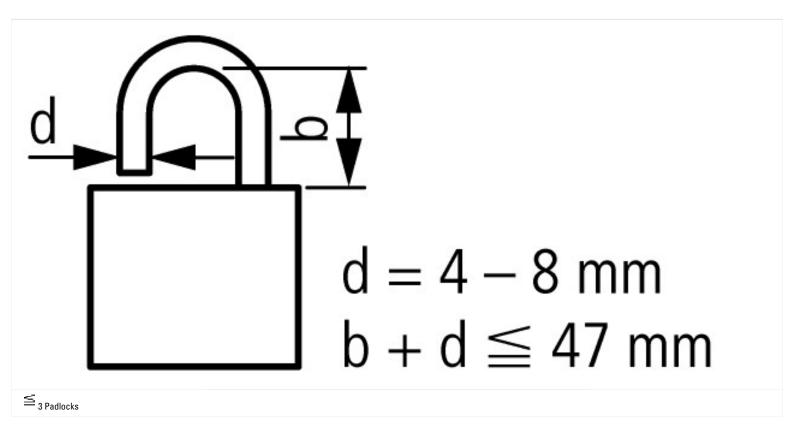

## **Additional product information (links)**

Installation instructions

AWA1150-1692 Rotary switch

ftp://ftp.moeller.net/DOCUMENTATION/AWA\_INSTRUCTIONS/16920808.pdf