

Power Feed Module

KFD2-EB2

- Interface for Power Rail
- Supply current ≤ 4 A
- Replaceable fuse
- Relay contact output, reversible
- LED status indication

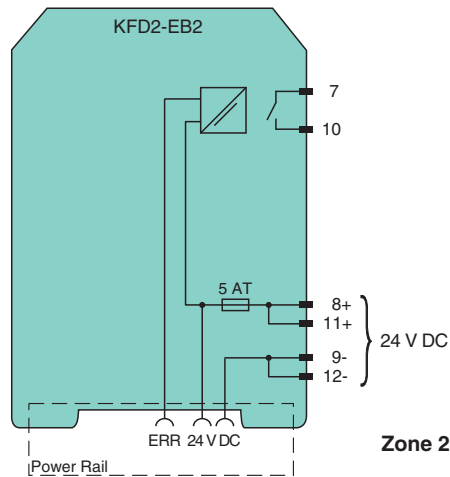
Power Feed Module



Function

The power feed module supplies the Power Rail with a voltage of 24 V DC and a maximum current of 4 A. In the event of a device fault or a wiring fault of any isolator on the Power Rail, the collective error messaging relay alerts the controller via a binary I/O point. This relay can be configured as normally-open or normally-closed. A green LED on the front of the device indicates the power state, and a red LED lights up during a fault condition. In the sense of functional safety (SIL) the device provides no dangerous failures. Thereby the safe condition of the supplied isolators must be defined as the de-energized state. Thus the device will not influence the safety calculation or the SIL value. This device is compatible with all versions of the Power Rail.

Connection



Technical Data

Supply	
Connection	terminals 11+, 12- terminals 8+, 9-
Rated voltage	U_r 20 ... 30 V DC The maximum rated operating voltage of the devices plugged onto the Power Rail must not be exceeded.
Fusing	5 AT/250 V AC recommended maximum utilization of the fuse: 80 %
Power dissipation	≤ 1 W
Output	
Connection	Power Rail

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 189783_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com


PEPPERL+FUCHS

Technical Data

Output rated operating current	max. 4 A
Output voltage	$U_i \geq \text{rated voltage } U_r = U_i - 0.6 \text{ V}$
Fault signal	relay output: NO contact
Contact loading	30 V AC/ 2 A / $\cos \phi \geq 0.7$; 40 V DC/ 2 A
Energized/De-energized delay	approx. 20 ms / approx. 20 ms
Indicators/settings	
Display elements	LEDs
Control elements	DIP-switch
Configuration	via DIP switches
Labeling	space for labeling at the front
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
Conformity	
Electromagnetic compatibility	NE 21:2006
Degree of protection	IEC 60529:2001
Ambient conditions	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications	
Degree of protection	IP20
Connection	screw terminals
Mass	approx. 100 g
Dimensions	20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) , housing type B2
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas	
Certificate	TÜV 00 ATEX 1618 X
Marking	⊕ II 3G Ex nA nC IIC T4
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-15:2010
International approvals	
FM approval	
Control drawing	116-0160
IECEX approval	IECEX UL 16.0051X
Approved for	Ex nA nC IIC T4 Gc
General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .
Accessories	
Optional accessories	<ul style="list-style-type: none"> - universal power rail UPR-03(-M)(-S) - universal power rail UPR-05(-S) - profile rail K-DUCT-GY(-UPR-03) - profile rail K-DUCT-GY(-UPR-05) - profile rail K-DUCT-BU(-UPR-03) - profile rail K-DUCT-BU(-UPR-05)

Assembly

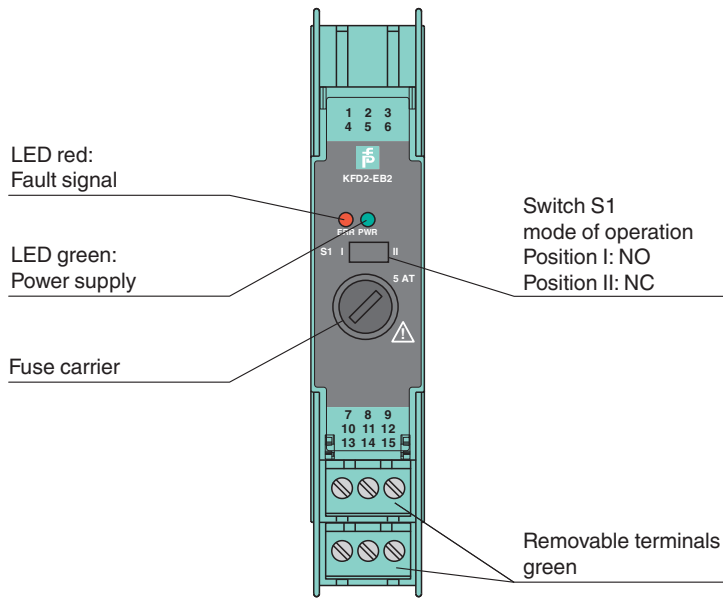Front view












Matching system components

	KFD2-STC5-Ex1	
	KFD2-STC5-Ex1	
	KFD2-SR2-Ex1.W	
	KFD2-STV5-Ex1-1	K-System, isolated barrier, 1-channel, SMART transmitter power supply with voltage output, DC power supply, 24 V, with removable terminal blocks, 20 mm width, output 0/1 V ... 5 V
	KFD2-STC5-Ex1.H	K-System, isolated barrier, 1-channel, SMART transmitter power supply with current output, DC power supply, 24 V, with removable terminal blocks, 20 mm width, device with higher voltage at a predefined current
	KFD2-CD-1.32	
	KFD2-CD-1.32	
	KFD2-UFC-1.D	24 V DC
	KCD2-SR-1.LB	24 V DC
	KCD2-SR-2	24 V DC
	KFD2-UFC-Ex1.D	24 V DC

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 189783_eng.pdf

Accessories

	UPR-03	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	UPR-03-M	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	UPR-03-S	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	UPR-05	Universal Power Rail with end caps and cover, 5 conductors, length: 2 m
	UPR-05-S	Universal Power Rail with end caps and cover, 5 conductors, length: 0.8 m
	K-DUCT-GY-UPR-03	Profile rail with UPR-03-* insert, 3 conductors, wiring comb field side gray
	K-DUCT-GY-UPR-05	Profile rail with UPR-05-* insert, 5 conductors, wiring comb field side gray
	K-DUCT-BU-UPR-03	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side blue
	K-DUCT-BU-UPR-05	Profile rail with UPR-05- * insert, 5 conductors, wiring comb field side blue