

Datasheet - SRB 301MC-24V

Guard door monitors and Safety control modules for
Emergency Stop applications / Monitoring of
electromechanical switchgear / SRB 301MC



- Fit for signal evaluation of outputs of safety magnetic switches
- 3 safety contacts, STOP 0
- 1 Signalling output
- Suitable for signal processing of potential-free outputs, e.g. emergency stop command devices, position switches and solenoid interlocks

(Minor differences between the printed image and the original product may exist!)

Ordering details

Product type description	SRB 301MC-24V
Article number	1193471
EAN code	4030661356082

Approval

Approval



BG




USA/CAN

Classification

Standards	EN ISO 13849-1, IEC 61508, EN 60947-5-1
PL	up e
Control category	up 4
PFH value	5.0 x 10 ⁻⁹ /h
- notice	up to max. 36500 switching cycles/year and at max. 60% contact load
SIL	up 3
Mission time	20 Years

Global Properties

Product name	SRB 301MC
Standards	IEC/EN 60204-1, EN 60947-5-1, EN ISO 13849-1, IEC 61508

Compliance with the Directives (Y/N) 	Yes
Climatic stress	EN 60068-2-78
Mounting	snaps onto standard DIN rail to EN 60715
Terminal designations	IEC/EN 60947-1
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic, ventilated
- Material of the contacts	, Ag-Ni, self-cleaning, positive action
Weight	245 g
Start conditions	Automatic or Start button
Start input (Y/N)	Yes
Feedback circuit (Y/N)	Yes
Start-up test (Y/N)	No
Automatic reset function (Y/N)	Yes
Reset with edge detection (Y/N)	No
Pull-in delay	
- ON delay with automatic start	100 ms
- ON delay with reset button	20 ms
Drop-out delay	
- Drop-out delay in case of power failure	80 ms
- Drop-out delay in case of emergency stop	20 ms

Mechanical data

Connection type	Screw connection
Cable section	
- Min. Cable section	0,25 mm ²
- Max. Cable section	2.5 mm ²
Pre-wired cable	rigid or flexible
Tightening torque for the terminals	0,6 Nm
Detachable terminals (Y/N)	No
Mechanical life	10.000.000 operations
Electrical lifetime	Derating curve available on request
restistance to shock	10 g / 11 ms
Resistance to vibration To EN 60068-2-6	10...55 Hz, Amplitude 0,35 mm, ± 15 %

Ambient conditions

Ambient temperature	
- Min. environmental temperature	- 25°C
- Max. environmental temperature	+ 60°C
Storage and transport temperature	
- Min. Storage and transport temperature	- 40°C
- Max. Storage and transport temperature	+ 85°C
Protection class	
- Protection class-Enclosure	IP40
- Protection class-Terminals	IP20
- Protection class-Clearance	IP54
Air clearances and creepage distances To IEC/EN 60664-1	
- Rated impulse withstand voltage U _{imp}	4 kV
- Overvoltage category	III To IEC/EN 60664-1
- Degree of pollution	2 To IEC/EN 60664-1

Electromagnetic compatibility (EMC)

EMC rating	conforming to EMC Directive
------------	-----------------------------

Electrical data

Rated DC voltage for controls

- Min. rated DC voltage for controls	20.4 V
- Max. rated DC voltage for controls	28.8 V
Rated AC voltage for controls, 50 Hz	
- Min. rated AC voltage for controls, 50 Hz	20.4 V
- Max. rated AC voltage for controls, 50 Hz	26.4 V
Rated AC voltage for controls, 60 Hz	
- Min. rated AC voltage for controls, 60 Hz	20.4 V
- Max. rated AC voltage for controls, 60 Hz	26.4 V
Contact resistance	max. 100 mΩ
Power consumption	2 W; 4.9 VA
Type of actuation	AC/DC
Switch frequency	
Rated operating voltage U _e	24 VAC/DC
Operating current I _e	
Frequency range	50 / 60 Hz
Electronic protection (Y/N)	Yes
Fuse rating for the operating voltage	Internal electronic trip, tripping current > 0,5 A, Reset after approximately 1 second/s

Inputs

Monitored inputs

- Short-circuit recognition (Y/N)	Yes
- Wire breakage detection (Y/N)	Yes
- Earth connection detection (Y/N)	Yes
Number of shutters	0 piece
Number of openers	2 piece
Cable length	1-channel without cross-wire detection: 1.5 mm ² = 1500 m; 2.5 mm ² = 2500 m 2-channel with/ without cross-wire detection: 1.5 mm ² = 1500 m; 2.5 mm ² = 2500 m
Conduction resistance	max. 40 Ω

Outputs

Stop category	0
Number of safety contacts	3 piece
Number of auxiliary contacts	1 piece
Number of signalling outputs	0 piece
Switching capacity	
- Switching capacity of the safety contacts	max. 250 VAC, 8 A ohmic (inductive in case of appropriate protective wiring)
Fuse rating	
- Protection of the safety contacts	8 A gG D-fuse
- Fuse rating for the auxiliary contacts	2 A slow blow
Utilisation category To EN 60947-5-1	AC-15: 230 V / 6 A DC-13: 24 V / 6 A
Number of undelayed semi-conductor outputs with signaling function	0 piece
Number of undelayed outputs with signaling function (with contact)	0 piece
Number of delayed semi-conductor outputs with signaling function.	0 piece
Number of delayed outputs with signalling function (with contact).	1 piece
Number of secure undelayed semi-conductor outputs with signaling function	0 piece
Number of secure, undelayed outputs with signaling function, with contact.	3 piece
Number of secure, delayed semi-conductor outputs with signaling function	0 piece

Number of secure, delayed outputs with signaling function (with contact). 0 piece






LED switching conditions display

LED switching conditions display (Y/N) Yes
 Number of LED's 4 piece

- LED switching conditions display
- The integrated LEDs indicate the following operating states.
 - Position relay K1
 - Position relay K2
 - Supply voltage
 - Internal operating voltage U_i

Miscellaneous data

Applications

-  Emergency-Stop button
-  Guard system
-  Pull-wire emergency stop switches
-  Safety light curtain
-  Safety sensor

Dimensions

Dimensions

- Width 22.5 mm
- Height 100 mm
- Depth 121 mm

notice

Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

notice - Wiring example

To secure a guard door up to PL 4 and Category #03#

Monitoring 1 guard door(s), each with a magnetic safety sensor of the BNS range

The feedback circuit monitors the position of the contactors Ka and Kb.

Switch setting: The cross-wire short detection function (factory default) is programmed by means of the switch located underneath the front cover of the module: position nQS (top): no cross-wire short protection, suitable for 1-channel applications and applications with outputs with potential in the control circuits. Position QS (bottom): cross-wire short protection, suitable for 2-channel applications without outputs with potential in the control circuits.

For 1-channel control, connect NC contact to S11/S12 and bridge S12/S22 (QS-switch = nQS)

Connect potential p-type outputs of safety light grids/curtains to S12/S22. The devices must have the same reference potential. (QS-switch = nQS)

Automatic start: The automatic start is programmed by connecting the feedback circuit to the terminals X1/X2. If the feedback circuit is not required, establish a bridge

The wiring diagram is shown with guard doors closed and in de-energised condition.

Documents


Operating instructions and Declaration of conformity (en) 998 kB, 21.01.2010
http://www.schmersal.net/Bilddata/Si_baust/Pdf/srb301mc/bedien/EN/mrl_srb_301mc_en.pdf

Operating instructions and Declaration of conformity (de) 1 MB, 25.06.2010
http://www.schmersal.net/Bilddata/Si_baust/Pdf/srb301mc/bedien/DE/mrl_srb_301mc_de.pdf

Wiring example (99) 17 kB, 04.08.2008

http://www.schmersal.net/Bilddata/Si_baust/srb301mc/schaltun/ksrb3118.pdf

Images

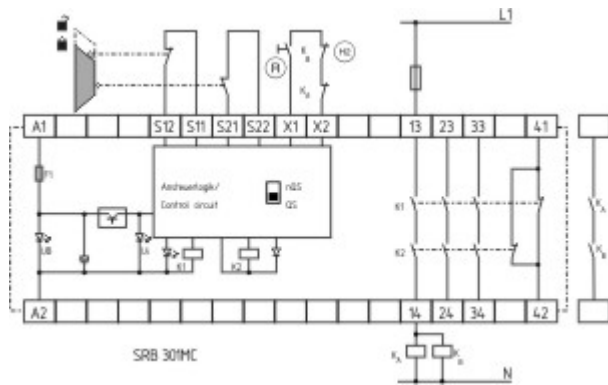

Wiring example

K.A. Schmersal GmbH, Mödinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 20.07.2010 - 09:11:53h Kasbase 1.3.5 DBI