



CONTACTOR RELAY, 3NO+1NC, DC 24 V,  
SCREW CONNECTION, SIZE S00

| General details:   |    |  |
|--|----|--|
| product brand name   |    | SIRIUS   |
| product designation  |    | contactor relay  |
| Size of the contactor  |    | S00  |
| Protection class IP / on the front   |    | IP20   |
| Degree of pollution  |    | 3  |
| Insulation voltage / with degree of pollution 3 / rated value              | V  | 690  |
| Installation altitude / at a height over sea level / maximum               | m  | 2,000  |
| Ambient temperature  |    |  |
| • during transport   | °C | -55 ... +80  |
| • during storage   | °C | -55 ... +80  |
| • during operating   | °C | -25 ... +60  |
| Contact reliability  |    | one incorrect switching operation of 100 million switching operations (17 V, 1 mA) |
| Resistance against shock   |    | 10g / 5 ms and 5g / 10 ms  |
| Impulse voltage resistance / rated value                                   | kV | 6  |
| Item designation   |    |  |
| • according to DIN EN 61346-2  |    | K  |
| • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 |    | K  |
| Mechanical operating cycles as operating time                              |    |  |

|   |  |            |
|---|--|------------|
| • of the contactor / typical  |  | 30,000,000 |
| • of the contactor with added auxiliary switch block / typical                        |  | 10,000,000 |
| • of the contactor with added electronics-compatible auxiliary switch block / typical |  | 5,000,000  |

#### Control circuit:

|   |   |             |
|---|---|-------------|
| <b>Type of voltage / of the controlled supply voltage</b>                             |   | DC          |
| <b>Control supply voltage / 1</b>   |   |             |
| • for DC / rated value  | V | 24          |
| <b>operating range factor control supply voltage rated value / of the magnet coil</b> |   |             |
| • for DC  |   | 0.8 ... 1.1 |
| <b>Pull-in power / of the solenoid / for DC</b>                                       | W | 3.2         |
| <b>Holding power / of the solenoid / for DC</b>                                       | W | 3.2         |

#### Auxiliary circuit:

|  |   |   |
|--|---|---|
| <b>Product extension / auxiliary switch</b>                    |   | Yes   |
| <b>Identification number and letter for switching elements</b> |   | 31 E  |
| <b>Contact reliability / of the auxiliary contacts</b>         |   | 1 faulty switching per 100 million (17 V, 1 mA) |
| <b>Number of NC contacts / for auxiliary contacts</b>          |   | 1   |
| • delayed switching  |   | 0   |
| • instantaneous switching                                      |   | 1   |
| • asynchronous switching                                       |   | 0   |
| • lagging switching  |   | 0   |
| <b>Number of NO contacts / for auxiliary contacts</b>          |   | 3   |
| • instantaneous switching                                      |   | 3   |
| • delayed switching  |   | 0   |
| • asynchronous switching                                       |   | 0   |
| • leading switching  |   | 0   |
| <b>Number of changeover contacts</b>                           |   |   |
| • for auxiliary contacts                                       |   | 0   |
| • of the auxiliary contacts / instantaneous switching          |   | 0   |
| <b>Operating current / of the auxiliary contacts</b>           |   |   |
| • at AC-12 / maximum   | A | 10  |
| • at AC-15   |   |   |
| • at 230 V   | A | 6   |
| • at 400 V   | A | 3   |
| • at 500 V   | A | 2   |
| • at 690 V   | A | 1   |
| • with 1 current path  |   |   |
| • at DC-12   |   |   |

- at 24 V
- at 110 V
- at 220 V
- at DC-13
  - at 24 V
  - at 110 V
  - at 220 V

|   |      |
|---|------|
| A | 10   |
| A | 3    |
| A | 1    |
| A | 10   |
| A | 1    |
| A | 0.27 |

#### Short-circuit:

**Design of the fuse link / for short-circuit protection of the auxiliary switch / required**

fuse gL/gG: 10 A

#### Installation/mounting/dimensions:

**Built in orientation**

with vertical mounting surface +/-180° rotatable, with vertical mounting surface +/- 30° tiltable to the front and back

**Type of mounting**

screw and snap-on mounting

**Width**

mm 45

**Height**

mm 57.5

**Depth**

mm 72

**Distance, to be maintained, to the ranks assembly / sideways**

mm 0

#### Connections:

**Design of the electrical connection / for auxiliary and control current circuit**

screw-type terminals

**Type of the connectable conductor cross-section**

- for auxiliary contacts

- solid

- finely stranded

- with conductor end processing

- for AWG conductors / for auxiliary contacts

2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>), 2x 4 mm<sup>2</sup>

2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)

2x (20 ... 16), 2x (18 ... 14), 1x 12

#### Certificates/approvals:

**Verification of suitability**

CSA / UL / CCC / GL / LRS / BV / DNV / RMRS / RINA

**General Product Approval**

**Functional Safety / Safety of Machinery**

**Test Certificates**



CQC



CSA

[ROSTEST](#)



UL

[SUVA](#)

[Manufacturer](#)

**Shipping Approval**



ABS



BUREAU VERITAS



DNV



GL



LRS



PRS

**Shipping Approval**

**other**



RINA



[Manufacturer](#)

**Safety:**

**Proportion of dangerous failures**

- with high demand rate / according to SN 31920
- with low demand rate / according to SN 31920

% 75

% 40

**T1 value / for proof test interval or service life / according to IEC 61508**

a 20

**Protection against electrical shock**

finger-safe

**B10 value / with high demand rate / according to SN 31920**

1,000,000

**Further information:**

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

**CAX-Online-Generator**




<http://www.siemens.com/cax>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3RH1131-1BB40/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RH1131-1BB40](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH1131-1BB40)

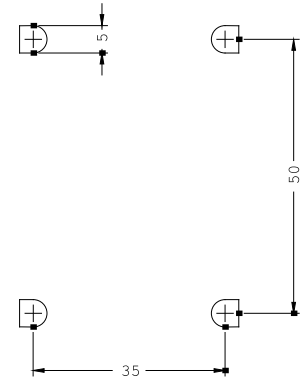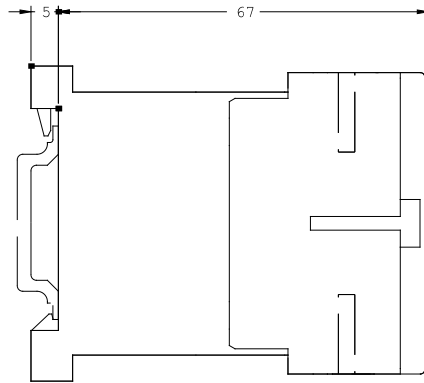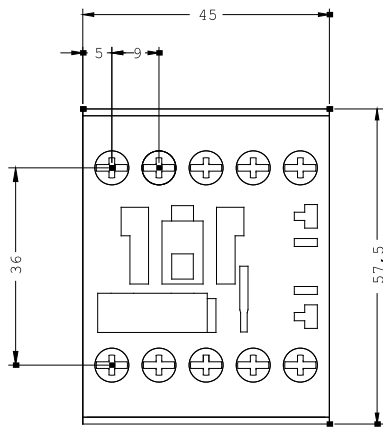

last change:

Feb 13, 2012