



CONTACTOR, AC-3, 15KW/400V, 1NO+1NC,  
AC 110V 50HZ, 120V 60HZ 3-POLE,  
SZ S0 SCREW TERMINAL

**General technical data:**

<b>Product brand name</b>		SIRIUS
<b>Product designation</b>		3RT2 contactor
<b>Size of the contactor</b>		S0
<b>Protection class IP / frontal/front side</b>		IP20
<b>Degree of pollution</b>		3
<b>Installation altitude / at a height over sea level / maximum</b>	m	2000
<b>Ambient temperature</b>		
• during storage	°C	-55 ... 80
• during the operating phase	°C	-25 ... 60
• during transport	°C	-55 ... 80
<b>Resistance against shock</b>		12.5g / 5 ms and 7.8g / 10 ms
<b>Impulse voltage resistance / rated value</b>	kV	6
<b>Insulation voltage / rated value</b>	V	690
<b>Resistive loss</b>		
• per conductor / typical	W	2.7
<b>Apparent loss power / of the magnet coil / at AC / typical</b>	V·A	9.8
<b>Item designation</b>		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		K

<ul style="list-style-type: none"> <li>• according to DIN EN 61346-2</li> </ul>		Q
<b>Mechanical operating cycles as operating time</b> <ul style="list-style-type: none"> <li>• of the contactor / typical</li> <li>• of the contactor with added auxiliary switch block / typical</li> <li>• of the contactor with added electronics-compatible auxiliary switch block / typical</li> </ul>		10000000 10000000 10000000
<b>Main circuit:</b>		
<b>Number of poles / for main current circuit</b>		3
<b>Number of NC contacts / for main contacts</b>		0
<b>Number of NO contacts / for main contacts</b>		3
<b>Operating voltage / at 3 AC / rated value</b> <ul style="list-style-type: none"> <li>• maximum</li> </ul>	V	690
<b>Operating current / at AC-1 / at 400 V</b> <ul style="list-style-type: none"> <li>• at 40 °C ambient temperature / rated value</li> <li>• at 60 °C ambient temperature / rated value</li> </ul>	A	50 42
<b>Operating current</b> <ul style="list-style-type: none"> <li>• at AC-2 / at 400 V / rated value</li> <li>• at AC-3 / at 400 V / rated value</li> <li>• at AC-4 / at 400 V / rated value</li> <li>• with 1 current path / at DC-1 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> <li>• with 2 current paths in series / at DC-1 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> <li>• with 3 current paths in series / at DC-1 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> <li>• with 1 current path / at DC-3 / at DC-5 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> <li>• with 2 current paths in series / at DC-3 / at DC-5 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> <li>• with 3 current paths in series / at DC-3 / at DC-5 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> </ul>	A	32 32 20 35 4.5 35 35 35 35 20 2.5 35 15 35 35
<b>Service power</b> <ul style="list-style-type: none"> <li>• at AC-2 / at 400 V / rated value</li> </ul>	kW	15

<ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>• at 400 V / rated value</li> <li>• at 500 V / rated value</li> <li>• at 690 V / rated value</li> </ul> </li> <li>• at AC-4 / at 400 V / rated value</li> </ul>	kW	15
	kW	15
	kW	15
	kW	15
<b>Operating reactive power / at AC-6b</b>		
<ul style="list-style-type: none"> <li>• at 230 V / rated value</li> <li>• at 400 V / rated value</li> <li>• at 690 V / rated value</li> </ul>	var	0
	var	0
	var	0
<b>Off-load operating frequency</b>	1/h	5000
<b>Switching frequency</b>		
<ul style="list-style-type: none"> <li>• at AC-1 / according to IEC 60947-6-2 / maximum</li> <li>• at AC-2 / according to IEC 60947-6-2 / maximum</li> <li>• at AC-3 / according to IEC 60947-6-2 / maximum</li> <li>• at AC-4 / according to IEC 60947-6-2 / maximum</li> </ul>	1/h	1000
	1/h	750
	1/h	750
	1/h	250

#### Control circuit:

<b>Design of activation of the operating mechanism</b>		conventional
<b>Type of voltage / of the controlled supply voltage</b>		AC
<b>Control supply voltage frequency</b>		
<ul style="list-style-type: none"> <li>• 1 / rated value</li> <li>• 2 / rated value</li> </ul>	Hz	50
	Hz	60
<b>Control supply voltage / 1</b>		
<ul style="list-style-type: none"> <li>• at 50 Hz / for AC <ul style="list-style-type: none"> <li>• rated value</li> </ul> </li> <li>• at 60 Hz / for AC <ul style="list-style-type: none"> <li>• rated value</li> </ul> </li> </ul>	V	110
	V	120
<b>Operating range factor control supply voltage rated value / of the solenoid</b>		
<ul style="list-style-type: none"> <li>• at 50 Hz / for AC</li> <li>• at 60 Hz / for AC</li> </ul>		0.8 ... 1.1
		0.85 ... 1.1
<b>Apparent pull-in power / of the solenoid / for AC</b>	V·A	77
<b>Apparent holding power / of the solenoid / for AC</b>	V·A	9.8
<b>Inductive power factor</b>		
<ul style="list-style-type: none"> <li>• with the pull-in power of the coil</li> <li>• with the pull-in power of the coil</li> </ul>		0.82
		0.25

#### Auxiliary circuit:

<b>Product extension / auxiliary switch</b>		Yes
<b>Contact reliability / of the auxiliary contacts</b>		1 faulty switching per 100 million (17 V, 1 mA)
<b>Number of NC contacts / for auxiliary contacts</b>		

<ul style="list-style-type: none"> <li>instantaneous switching</li> <li>lagging switching</li> </ul>		1	
		0	
<b>Number of NO contacts / for auxiliary contact</b>			
<ul style="list-style-type: none"> <li>instantaneous switching</li> <li>leading switching</li> </ul>		1	
		0	
<b>Operating current / of the auxiliary contacts</b>			
<ul style="list-style-type: none"> <li>at AC-12 / maximum</li> </ul>	A	10	
<ul style="list-style-type: none"> <li>at AC-15</li> </ul>			
<ul style="list-style-type: none"> <li>at 230 V</li> </ul>	A	10	
<ul style="list-style-type: none"> <li>at 400 V</li> </ul>	A	3	
<ul style="list-style-type: none"> <li>at DC-12</li> </ul>			
<ul style="list-style-type: none"> <li>at 48 V</li> </ul>	A	6	
<ul style="list-style-type: none"> <li>at 60 V</li> </ul>	A	6	
<ul style="list-style-type: none"> <li>at 110 V</li> </ul>	A	3	
<ul style="list-style-type: none"> <li>at 220 V</li> </ul>	A	1	
<ul style="list-style-type: none"> <li>at DC-13</li> </ul>			
<ul style="list-style-type: none"> <li>at 24 V</li> </ul>	A	6	
<ul style="list-style-type: none"> <li>at 48 V</li> </ul>	A	2	
<ul style="list-style-type: none"> <li>at 60 V</li> </ul>	A	2	
<ul style="list-style-type: none"> <li>at 110 V</li> </ul>	A	1	
<ul style="list-style-type: none"> <li>at 220 V</li> </ul>	A	0.3	

#### Short-circuit:

##### Design of the fuse link

- for short-circuit protection of the auxiliary switch / required
- for short-circuit protection of the main circuit
  - at type of coordination 1 / required
  - at type of coordination 2 / required

fuse gL/gG: 10 A

gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE:  
100 A

gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE:  
35A

#### Installation/mounting/dimensions:

<b>Built in orientation</b>		vertical
<b>Type of mounting</b>		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
<b>Type of fixing/fixation / series installation</b>		Yes
<b>Width</b>	mm	45
<b>Height</b>	mm	85
<b>Depth</b>	mm	92
<b>Distance, to be maintained, to the ranks assembly</b>		
<ul style="list-style-type: none"> <li>forwards</li> </ul>	mm	0
<ul style="list-style-type: none"> <li>backwards</li> </ul>	mm	0

• upwards	mm	6
• downwards	mm	6
• sideways	mm	0
<b>Distance, to be maintained, to earthed part</b>		
• forwards	mm	6
• backwards	mm	0
• upwards	mm	6
• downwards	mm	6
• sideways	mm	6
<b>Distance, to be maintained, conductive elements</b>		
• forwards	mm	6
• backwards	mm	6
• upwards	mm	6
• downwards	mm	10
• sideways	mm	6

### Connections:

#### Design of the electrical connection

- for main current circuit
- for auxiliary and control current circuit

screw-type terminals  
screw-type terminals

#### Type of the connectable conductor cross-section

- for main contacts
  - unifilar
  - stranded wire
  - stranded wire
    - with conductor end processing
- at AWG-conductors / for main contacts
- for auxiliary contacts
  - solid
  - finely stranded
    - with wire end processing
- for AWG conductors / for auxiliary contacts

2x (1 ... 2.5 mm<sup>2</sup>), 2x (2.5 ... 10 mm<sup>2</sup>)  
2x (1 ... 2.5 mm<sup>2</sup>), 2x (2.5 ... 10 mm<sup>2</sup>)  
2x (1 ... 2.5 mm<sup>2</sup>), 2x (2.5 ... 6 mm<sup>2</sup>), 1x 10 mm<sup>2</sup>  
2x (16 ... 12), 2x (14 ... 8)  
2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)  
2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)  
2x (20 ... 16), 2x (18 ... 14)

### Certificates/approvals:

#### Verification of suitability

CE / UL / CSA / CCC

### Safety:

#### B10 value / with high demand rate

- according to SN 31920

1000000

#### T1 value / for proof test interval or service life

- according to IEC 61508

a 20

<b>Proportion of dangerous failures</b>		
• with low demand rate / according to SN 31920	%	40
• with high demand rate / according to SN 31920	%	75
<b>Failure rate (FIT value) / with low demand rate</b>		
• according to SN 31920	FIT	100
<b>Protection against electrical shock</b>		finger-safe

#### Further information:

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

#### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

#### CAX-Online-Generator


<http://www.siemens.com/cax>



#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT2027-1AK60/all>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RT2027-1AK60](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT2027-1AK60)

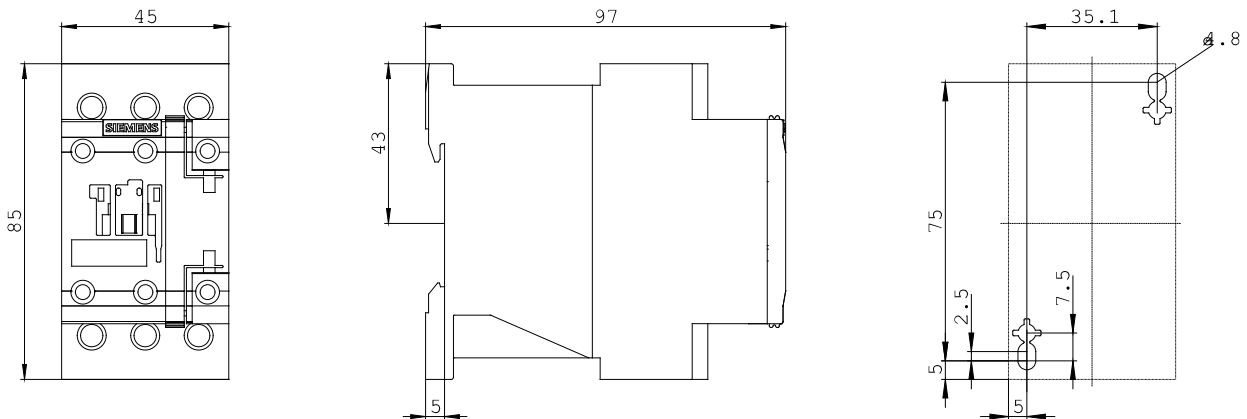

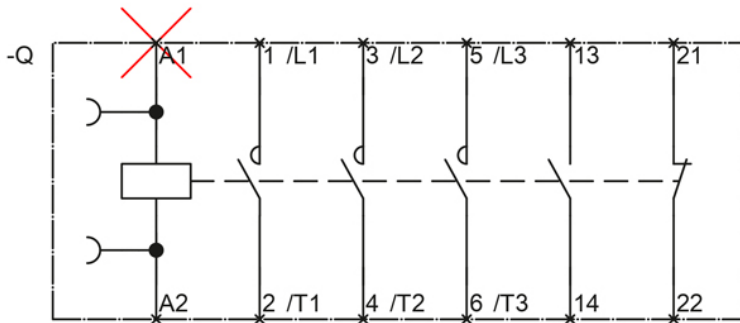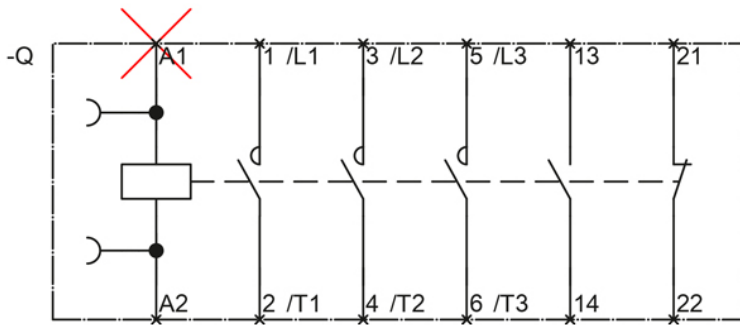

last change:

Oct 7, 2010