SIEMENS

Data sheet

3RV2011-1CA10




Circuit breaker size S00 for motor protection, CLASS 10 A-release 1.8...2.5 A N-release 33 A screw terminal Standard switching capacity

4/12 6/13	
product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	7.25 W
 at AC in hot operating state per pole 	2.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
 of the main contacts typical 	100 000
 of auxiliary contacts typical 	100 000
electrical endurance (operating cycles) typical	100 000
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 02 ATEX F 001
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	1.8 2.5 A
operating voltage	
rated value	20 690 V
 at AC-3 rated value maximum 	690 V
• at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	2.5 A
operational current	


• at AC-3 at 400 V rated value	2.5 A
at AC-3e at 400 V rated value	2.5 A
operating power	
• at AC-3	
— at 230 V rated value	0.4 kW
— at 400 V rated value	0.75 kW
— at 500 V rated value	1.1 kW
— at 690 V rated value	1.5 kW
• at AC-3e	
— at 230 V rated value	0.4 kW
— at 400 V rated value	0.75 kW
— at 500 V rated value	1.1 kW
— at 690 V rated value	1.5 kW
operating frequency	
• at AC-3 maximum	15 1/h
● at AC-3e maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
ground fault detection	No
phase failure detection	Yes
· · · · · · · · · · · · · · · · · · ·	CLASS 10
trip class	
design of the overload release	thermal
maximum short-circuit current breaking capacity (Icu)	400.14
at AC at 240 V rated value	100 kA
• at AC at 400 V rated value	100 kA
at AC at 500 V rated value	100 kA
at AC at 690 V rated value	10 kA
operating short-circuit current breaking capacity (lcs) at AC	
 at 240 V rated value 	100 kA
 at 400 V rated value 	100 kA
 at 500 V rated value 	100 kA
● at 690 V rated value	10 kA
response value current of instantaneous short-circuit trip unit	33 A
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	2.5 A
• at 600 V rated value	2.5 A
yielded mechanical performance [hp]	
 for single-phase AC motor 	
— at 230 V rated value	0.17 hp
• for 3-phase AC motor	
— at 200/208 V rated value	0.5 hp
— at 220/230 V rated value	0.5 hp
— at 460/480 V rated value	1 hp
— at 575/600 V rated value	1.5 hp
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
design of the fuse link for IT network for short-circuit protection of the main circuit	
• at 400 V	gL/gG 25 A
• at 500 V	gL/gG 25 A
• at 690 V	gL/gG 20 A
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
height	97 mm

width 45 mm depth 97 mm required spacing 0 mm • with side-by-side mounting at the side 0 mm - downwards 30 mm - upwards 30 mm - at the side 9 mm • for live parts at 400 V - - downwards 30 mm - at the side 9 mm • for live parts at 400 V - - downwards 30 mm - upwards 30 mm - upwards 30 mm - upwards 30 mm - at the side 9 mm • for grounded parts at 500 V - - downwards 30 mm - upwards 30 mm - at the side 9 mm • for live parts at 500 V - - downwards 30 mm - upwards 50 mm <t< th=""><th></th></t<>	
required spacing• with side-by-side mounting at the side0 mm• for grounded parts at 400 V30 mm- upwards30 mm- upwards30 mm- at the side9 mm• for live parts at 400 V downwards30 mm- upwards30 mm- upwards30 mm- upwards30 mm- upwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- at the side9 mm• for grounded parts at 690 V downwards50 mm- backwards0 mm- at the side30 mm- backwards0 mm- at the side30 mm- at the side30 mm- backwards0 mm- for wards0 mm- for wards0 mm	
 with side-by-side mounting at the side for grounded parts at 400 V downwards upwards upwards at the side mm at the side mm downwards a0 mm at the side mm for live parts at 400 V downwards a0 mm at the side mm for grounded parts at 400 V downwards a0 mm upwards a0 mm upwards a0 mm at the side mm for grounded parts at 500 V downwards a0 mm at the side mm at the side mm at the side mm for live parts at 500 V ad wmards mm at the side mm for live parts at 500 V downwards mm at the side mm for grounded parts at 600 V at the side mm for grounded parts at 690 V at the side mm backwards mm at the side mm for grounded parts at 690 V at the side mm for mm backwards mm for mm backwards mm for wards mm for wards mm 	
 for grounded parts at 400 V downwards upwards upwards at the side 9 mm for live parts at 400 V downwards upwards a0 mm upwards 30 mm upwards 30 mm at the side 9 mm for grounded parts at 500 V downwards a0 mm at the side 9 mm for grounded parts at 500 V downwards a0 mm at the side 9 mm for live parts at 500 V at the side 9 mm for live parts at 500 V at the side 9 mm for live parts at 500 V at the side 9 mm for live parts at 500 V at the side 9 mm for grounded parts at 600 V at the side 9 mm for grounded parts at 690 V at the side 0 mm at the side 0 mm at the side 0 mm backwards 0 mm at the side 0 mm for wards 0 mm at the side 0 mm 	
- downwards30 mm- upwards30 mm- at the side9 mm• for live parts at 400 V downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for grounded parts at 600 V downwards50 mm- upwards50 mm- at the side9 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- upwards50 mm- upwards50 mm- backwards0 mm- at the side30 mm- at the side30 mm- for wards0 mm- for wards0 mm	
upwards30 mm at the side9 mm• for live parts at 400 V30 mm downwards30 mm upwards30 mm at the side9 mm• for grounded parts at 500 V downwards30 mm at the side9 mm• for grounded parts at 500 V downwards30 mm upwards30 mm at the side9 mm• for live parts at 500 V at the side9 mm• for live parts at 500 V downwards30 mm at the side9 mm• for grounded parts at 690 V downwards50 mm at the side9 mm• for grounded parts at 690 V downwards50 mm upwards50 mm upwards0 mm backwards0 mm backwards0 mm at the side30 mm at the side0 mm	
at the side9 mm• for live parts at 400 V30 mm downwards30 mm upwards30 mm at the side9 mm• for grounded parts at 500 V downwards30 mm downwards30 mm upwards30 mm upwards30 mm at the side9 mm• for live parts at 500 V downwards30 mm at the side9 mm• for live parts at 500 V downwards30 mm at the side9 mm• for grounded parts at 690 V downwards50 mm at the side9 mm• for grounded parts at 690 V downwards50 mm at the side9 mm• for grounded parts at 690 V downwards50 mm at the side90 mm backwards0 mm backwards0 mm at the side30 mm at the side0 mm forwards0 mm forwards0 mm	
 for live parts at 400 V downwards downwards upwards upwards at the side mm for grounded parts at 500 V downwards a0 mm upwards 30 mm upwards 30 mm upwards 30 mm at the side mm for live parts at 500 V at the side mm for live parts at 500 V downwards a0 mm at the side mm for live parts at 500 V downwards a0 mm at the side mm for grounded parts at 690 V at the side mm for grounded parts at 690 V at the side mm for grounded parts at 690 V at the side mm for grounded parts at 690 V at the side mm for grounded parts at 690 V for mm backwards mm backwards mm for mm for wards for mm for wards for mm for live parts at 690 V 	
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- upwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- upwards30 mm- upwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- backwards0 mm- backwards0 mm- at the side30 mm- her side30 mm- her side0 mm- her side0 mm- for wards0 mm- for wards0 mm	
- upwards30 mm- at the side9 mm• for grounded parts at 500 V9 mm- downwards30 mm- upwards30 mm- upwards9 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- upwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- at the side9 mm• for grounded parts at 690 V nownwards50 mm- nownwards50 mm- nownwards50 mm- nownwards0 mm- at the side0 mm- at the side0 mm- forwards0 mm- forwards0 mm	
at the side9 mm• for grounded parts at 500 V30 mm downwards30 mm upwards30 mm at the side9 mm• for live parts at 500 V	
• for grounded parts at 500 V30 mm- downwards30 mm- upwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- upwards30 mm- upwards30 mm- at the side9 mm- at the side9 mm- at the side9 mm- downwards50 mm- downwards50 mm- downwards50 mm- upwards50 mm- upwards0 mm- backwards0 mm- at the side30 mm- backwards0 mm- horkmards0 mm	
- downwards30 mm- upwards30 mm- upwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- upwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- upwards50 mm- not side9 m	
- upwards30 mm- at the side9 mm• for live parts at 500 V9 mm- downwards30 mm- upwards30 mm- upwards9 mm- at the side9 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- upwards50 mm- upwards50 mm- upwards50 mm- backwards0 mm- backwards0 mm- forwards0 mm- forwards0 mm	
at the side9 mm at the side9 mm for live parts at 500 V30 mm downwards30 mm upwards30 mm at the side9 mm at the side9 mm downwards50 mm downwards50 mm upwards50 mm upwards50 mm backwards0 mm backwards0 mm at the side30 mm forwards0 mm	
 for live parts at 500 V downwards upwards at the side for grounded parts at 690 V downwards for grounded parts at 690 V downwards 50 mm upwards 50 mm for grounded parts for grounded	
- downwards30 mm- upwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- upwards0 mm- backwards0 mm- at the side30 mm- at the side0 mm- forwards0 mm- forwards0 mm	
- upwards30 mm- at the side9 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- backwards0 mm- at the side30 mm- at the side30 mm- forwards0 mm- forwards0 mm	
- at the side9 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- backwards0 mm- at the side30 mm- forwards0 mm- forwards0 mm	
 for grounded parts at 690 V downwards upwards backwards backwards at the side forwards o mm 	
- downwards 50 mm - upwards 50 mm - backwards 0 mm - at the side 30 mm - forwards 0 mm - forwards 0 mm	
at the side 30 mm forwards 0 mm • for live parts at 690 V 0	
— forwards 0 mm • for live parts at 690 V	
• for live parts at 690 V	
· · · · · · · · · · · · · · · · · · ·	
- downwards 50 mm	
— upwards 50 mm	
— backwards 0 mm	
- at the side 30 mm	
- forwards 0 mm	
Connections/ Terminals	
type of electrical connection	
for main current circuit screw-type terminals arrangement of electrical connectors for main current circuit Top and bottom	
circuit type of connectable conductor cross-sections	
for main contacts	
- solid or stranded 2x (0,75 2,5 mm ²), 2x 4 mm ²	
$- \text{ finely stranded with core end processing} \qquad 2x (0.5 \dots 2.6 \text{ mm}^2), 2x (0.75 \dots 2.5 \text{ mm}^2)$	
• for AWG cables for main contacts 2x (18 14), 2x 12	
tightening torque	
● for main contacts with screw-type terminals 0.8 1.2 N·m	
design of screwdriver shaft Diameter 5 to 6 mm	
size of the screwdriver tip Pozidriv size 2	
design of the thread of the connection screw	
• for main contacts M3	
Safety related data	
B10 value	
with high demand rate according to SN 31920 5 000	
proportion of dangerous failures	
with low demand rate according to SN 31920 50 %	
with high demand rate according to SN 31920 50 %	
failure rate [FIT]	
with low demand rate according to SN 31920 50 FIT	
T1 value for proof test interval or service life according to IEC 61508	
protection class IP on the front according to IEC 60529 IP20	
touch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front	
display version for switching status Handle	


ertificates/ approvals					
General Product Ap	proval				For use in hazard- ous locations
	<u>Confirmation</u>		KC	EHC	IECEx
For use in hazard- ous locations	Declaration of Confo	ormity	Test Certificates		Marine / Shipping
KEX ATEX	UK CA	CE EG-Konf.	<u>Special Test Certific-</u> <u>ate</u>	<u>Type Test Certific-</u> ates/Test Report	ABS
Marine / Shipping					other
BUREAU VERITAS		Lloyd's Register urs	PRS	RINA	<u>Confirmation</u>
other	Railway				
VDE	<u>Confirmation</u>	<u>Vibration and Shock</u>			
urther information Siemens has decided	d to exit the Russian ma	rket (see here).			
Siemens is working of Please contact your lo EAC relevant market (Information on the pa https://support.industry Information- and Dov https://www.siemens.co	on the renewal of the cu cal Siemens office on the other than the sanctioned ackaging y siemens.com/cs/ww/en/v vnloadcenter (Catalogs,	status of validity of the EA EAEU member states Rus view/109813875	C certification if you intend	to import or offer to sup	ply these products to ar

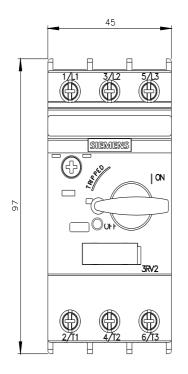



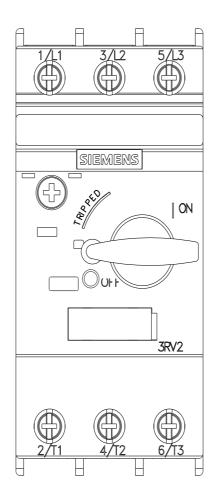

7/24/2023

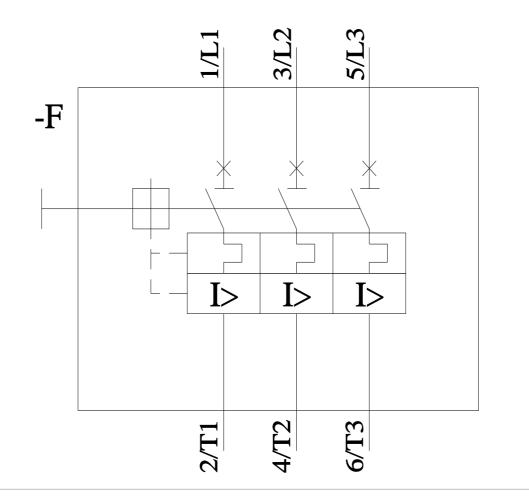

last modified:

11/21/2022 🖸