## **SIEMENS**

Data sheet 3RV2711-4AD10



Circuit breaker size S00 for system protection with approval circuit breaker UL 489, CSA C22.2 No.5-02 A-release 15 A N-release 208 A screw terminal Standard switching capacity

product brand name	SIRIUS	
product designation	Circuit breaker	
design of the product	For system protection according to UL 489/CSA C22.2 No. 5	
product type designation	3RV2	
General technical data		
size of the circuit-breaker	S00	
product extension auxiliary switch	Yes	
power loss [W] for rated value of the current		
<ul> <li>at AC in hot operating state</li> </ul>	9.25 W	
<ul> <li>at AC in hot operating state per pole</li> </ul>	3.1 W	
insulation voltage with degree of pollution 3 at AC rated value	690 V	
surge voltage resistance rated value	6 kV	
shock resistance according to IEC 60068-2-27	25 g / 11 ms (rectangular impulse and sine pulse)	
mechanical service life (operating cycles)		
<ul> <li>of the main contacts typical</li> </ul>	100 000	
<ul> <li>of auxiliary contacts typical</li> </ul>	100 000	
electrical endurance (operating cycles) typical	100 000	
reference code according to IEC 81346-2	Q	
Substance Prohibitance (Date)	10/01/2009	
SVHC substance name	Blei - 7439-92-1	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
<ul> <li>during operation</li> </ul>	-20 +60 °C	
during storage	-50 +80 °C	
during transport	-50 +80 °C	
relative humidity during operation	10 95 %	
Main circuit		
number of poles for main current circuit	3	
operating voltage		
rated value	20 690 V	
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V	
at AC-3e rated value maximum	690 V	
operating frequency rated value	50 60 Hz	
operational current rated value	15 A	
operational current		
• at AC-3 at 400 V rated value	15 A	
• at AC-3e at 400 V rated value	15 A	
operating power		

— at 230 V rated value	4 kW
— at 400 V rated value	7.5 kW
— at 500 V rated value	7.5 kW
— at 690 V rated value	11 kW
• at AC-3e	
— at 230 V rated value	4 kW
— at 400 V rated value	7.5 kW
— at 500 V rated value	7.5 kW
— at 690 V rated value	11 kW
operating frequency	TTRVV
	1E 1/b
• at AC-3 maximum	15 1/h
at AC-3e maximum	15 1/h
Protective and monitoring functions	
product function	
ground fault detection	No
phase failure detection	No
design of the overload release	thermal
maximum short-circuit current breaking capacity (Icu)	
at AC at 240 V rated value	100 kA
at AC at 400 V rated value	55 kA
at AC at 500 V rated value	10 kA
at AC at 690 V rated value	4 kA
at 480 AC Y/277 V according to UL 489 rated value	65 kA
	OO IVA
operating short-circuit current breaking capacity (Ics) at AC  • at 240 V rated value	100 kA
• at 400 V rated value	30 kA
at 500 V rated value	5 kA
at 690 V rated value	2 kA
response value current of instantaneous short-circuit trip unit	208 A
Short-circuit protection	
	V/
product function short circuit protection	Yes
product function short circuit protection design of the short-circuit trip	Yes magnetic
design of the short-circuit trip design of the fuse link for IT network for short-circuit	- 17
design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit	magnetic
design of the short-circuit trip design of the fuse link for IT network for short-circuit	- 17
design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit	magnetic
design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V	magnetic gG 80 A
design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V	gG 80 A gG 63 A
design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V	magnetic  gG 80 A  gG 63 A  gG 50 A
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions	magnetic  gG 80 A  gG 63 A  gG 50 A
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing • for grounded parts at 400 V	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts at 400 V  — downwards	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts at 400 V  — downwards — upwards	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm  30 mm 30 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts at 400 V  — downwards  — upwards  — at the side	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V • at 400 V • at 500 V • at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth  required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm  30 mm 30 mm 30 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts at 400 V  — downwards  — upwards  — at the side	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm  30 mm 30 mm 30 mm 30 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position fastening method  height  width  depth  required spacing  • for grounded parts at 400 V  — downwards — upwards — at the side  • for live parts at 400 V	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm  30 mm 30 mm 30 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V • at 400 V • at 500 V • at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm  30 mm 30 mm 30 mm 30 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V • at 400 V • at 500 V • at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — upwards	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm  30 mm 30 mm 30 mm 30 mm 30 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V • at 400 V • at 500 V • at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth  required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm  30 mm 30 mm 30 mm 30 mm 30 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V • at 400 V • at 500 V • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts at 400 V  — downwards — upwards — at the side  • for live parts at 400 V  — downwards — upwards — upwards — at the side • for grounded parts at 500 V	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm  30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V • at 400 V • at 500 V • at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth  required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V — downwards	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm  30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V • at 400 V • at 500 V • at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth  required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm  30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V • at 400 V • at 500 V • at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth  required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V	gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm  30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V • at 400 V • at 500 V • at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth  required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm  30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V • at 400 V • at 500 V • at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth  required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V	gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm  30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm

<ul> <li>for grounded parts at 690 V</li> </ul>	
— downwards	70 mm
— upwards	70 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
• for live parts at 690 V	
— downwards	70 mm
— upwards	70 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
arrangement of electrical connectors for main current	Top and bottom
circuit	
type of connectable conductor cross-sections	
for main contacts	
— solid or stranded	1 10 mm², max. 2x 10 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	1 16 mm², max. 6 + 16 mm²
for AWG cables for main contacts	2x (14 10)
tightening torque	
for main contacts with screw-type terminals	2.5 3 N·m
design of screwdriver shaft	Diameter 5 to 6 mm
size of the screwdriver tip	Pozidriv size 2
design of the thread of the connection screw	
for main contacts	M4
Safety related data	
proportion of dangerous failures	
<ul> <li>with low demand rate according to SN 31920</li> </ul>	50 %
with high demand rate according to SN 31920	50 %
B10 value with high demand rate according to SN 31920	5 000
failure rate [FIT] with low demand rate according to SN 31920	50 FIT
IEC 61508	
T1 value	
<ul> <li>for proof test interval or service life according to IEC 61508</li> </ul>	10 a
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
display version for switching status	Handle
Approvals Certificates	
General Product Approval	

## General Product Approva







Confirmation



<u>KC</u>

General Product Approval

**Test Certificates** 

Marine / Shipping

other

EHC

Type Test Certificates/Test Report

Special Test Certificate





Miscellaneous

other Environment





## Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2711-4AD10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2711-4AD10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RV2711-4AD10

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2711-4AD10&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2711-4AD10/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2711-4AD10&objecttype=14&gridview=view1

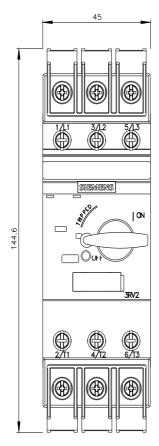

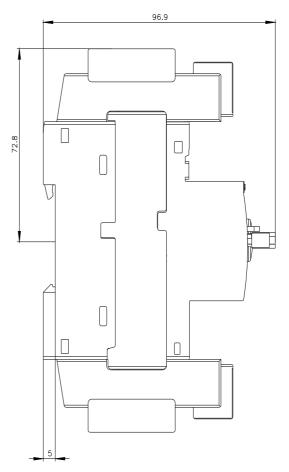

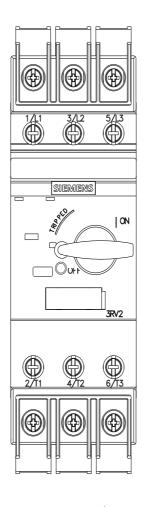

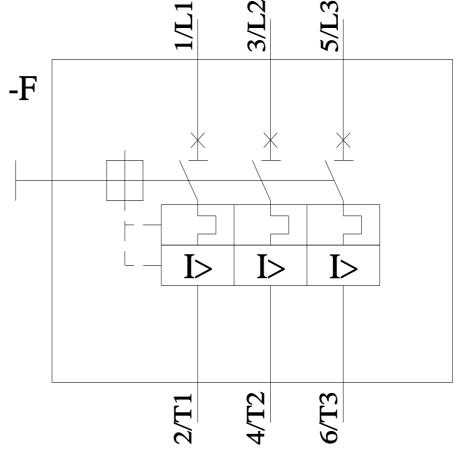

last modified: 8/29/2023 🖸