

fixed-mounted circuit breaker 3-pole, size II, IEC In=3200A to 690V, AC50/60Hz
 Icu=66kA at 500V rear connection horizontal Overcurrent release ETU 25 LSI
 protection adjustable 0.4-1 in With manual operating mechanism with storage with
 mechanical request without 1st auxiliary release without 2nd auxiliary release
 2NO+2NC K07= Tripped signaling contact, 1 CO not possible with option F02
 N61= Cage spring connections for auxiliary S01= CES locking device in OFF
 position (safe OFF/disconnector functionality) Disconnecter condition in compliance
 with IEC 60947-2 S30 = LOCKING DEVICE AGAINST OPENING OF CABINET
 S33= Castell/Fortress Tension lever T40= Door sealing frame

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1232-2CB32-1AA2-Z K07+N61+S01+S30+S33+T40>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1232-2CB32-1AA2-Z K07+N61+S01+S30+S33+T40>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1232-2CB32-1AA2-Z K07+N61+S01+S30+S33+T40


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

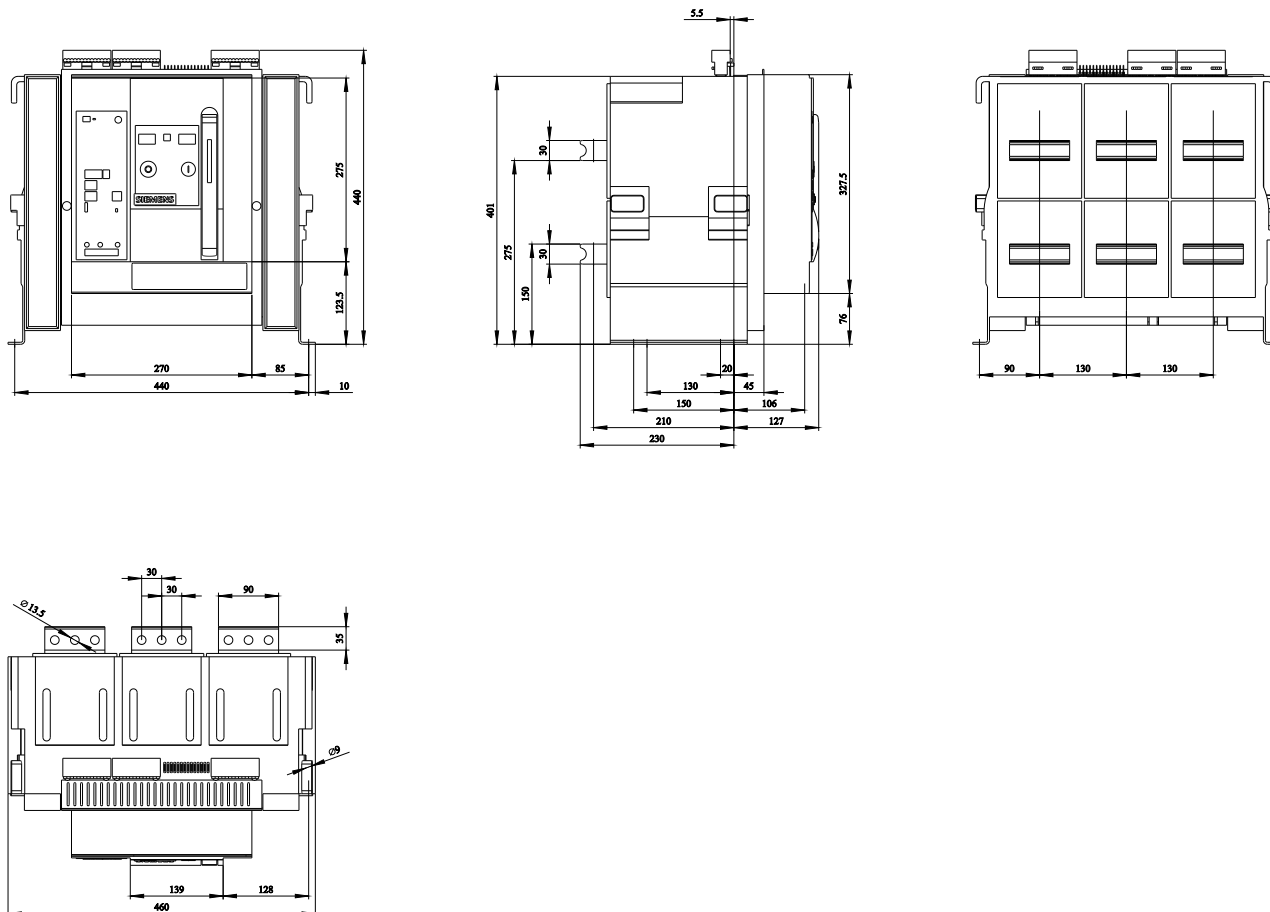

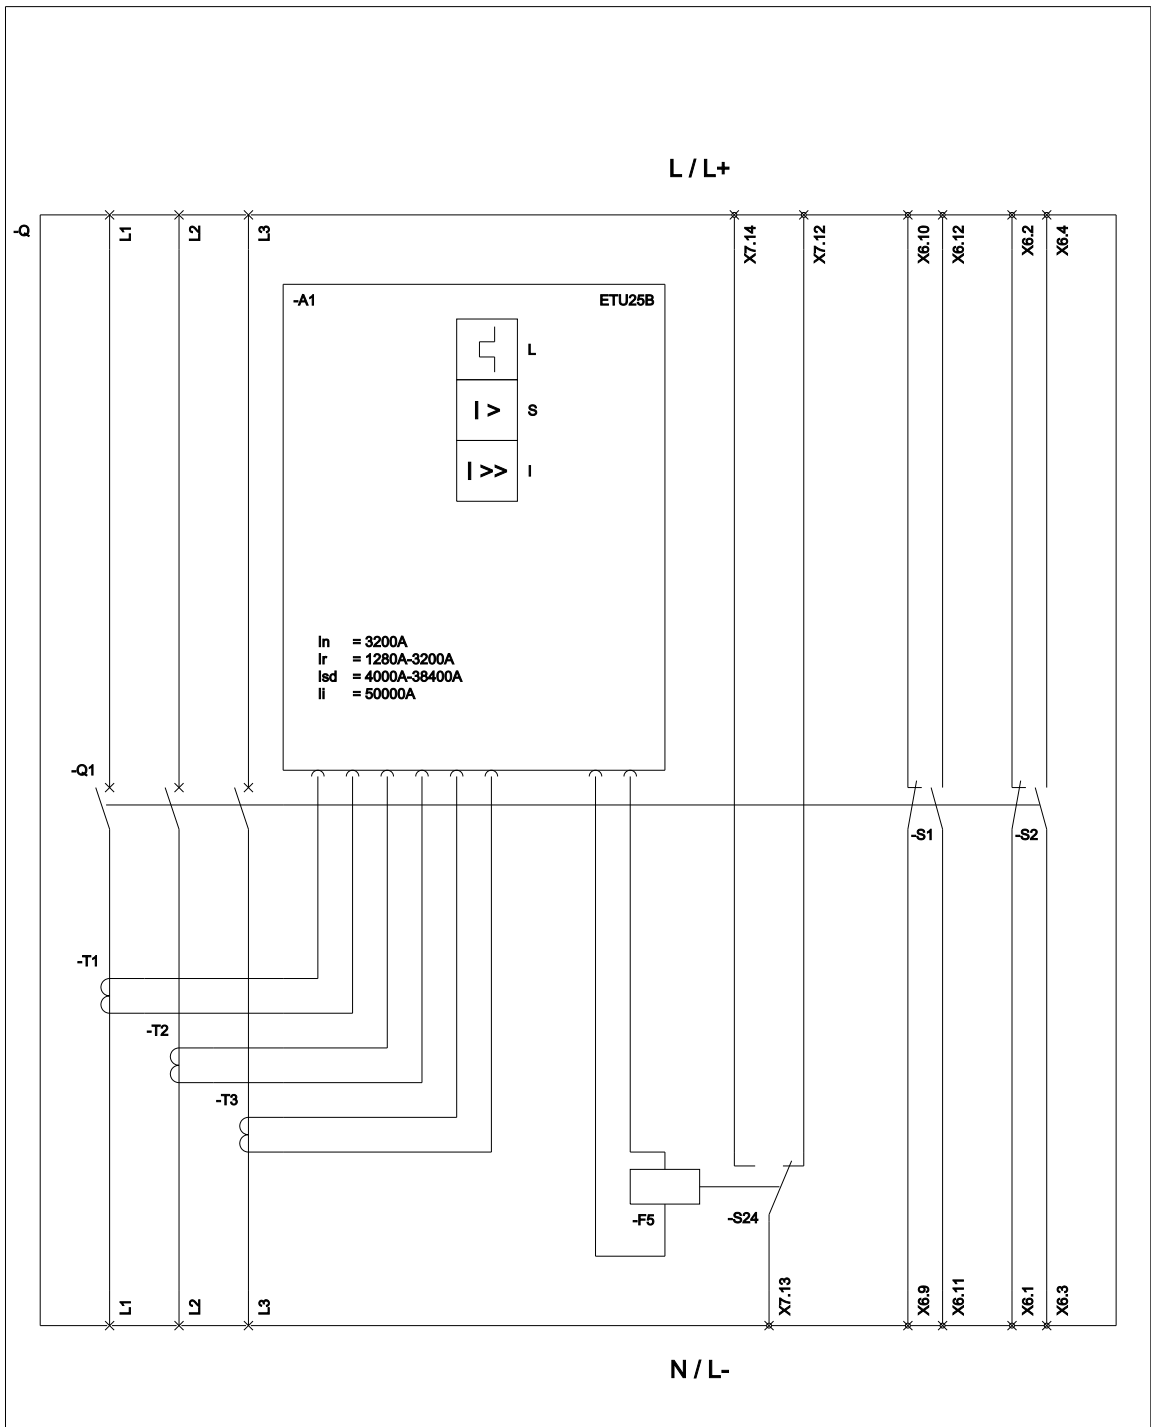

L (Long Time Delay / Überlastschutz); S (Short Time Delay / Kurzschlusschutz, kurzzeitverzögert); I (Instantaneous / Kurzschlusschutz, unverzögert);
 F5 (Maglatch for trip unit / Auslösemagnet); S1 - S8 (Auxiliary switch / Hilfschalter);
 S24 (1st trip signalling switch K07 (Reset position) / Erster Auslösemeldeschalter K07 (Reset Position));

last modified:

12/23/2020

