



AUXILIARY SWITCH ATTACHABLE F. RES.CURRENT
OP.CIRC. BREAKER F. 16 TO 80A,
1NO+1NC

Similar to image

Technical data:

Number of NC contacts		1
Product extension		Auxiliary current switch
Number of change-over switches		0
Number of NO contacts		1
Number of pitch units for width		0.5
Breaking capacity current / nominal value	A	6
Operating voltage / rated value	V	230
Version du produit / ajouté en usine		No
Product extension / can be mounted		residual current operated circuit breaker
Number of fault signal contacts		0
Type of voltage / of the control voltage		AC/DC

Certificates/approvals:

General Product Approval

[ROSTEST](#)



Declaration of Conformity

[Manufacturer](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/maill>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SW3300/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SW3300

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

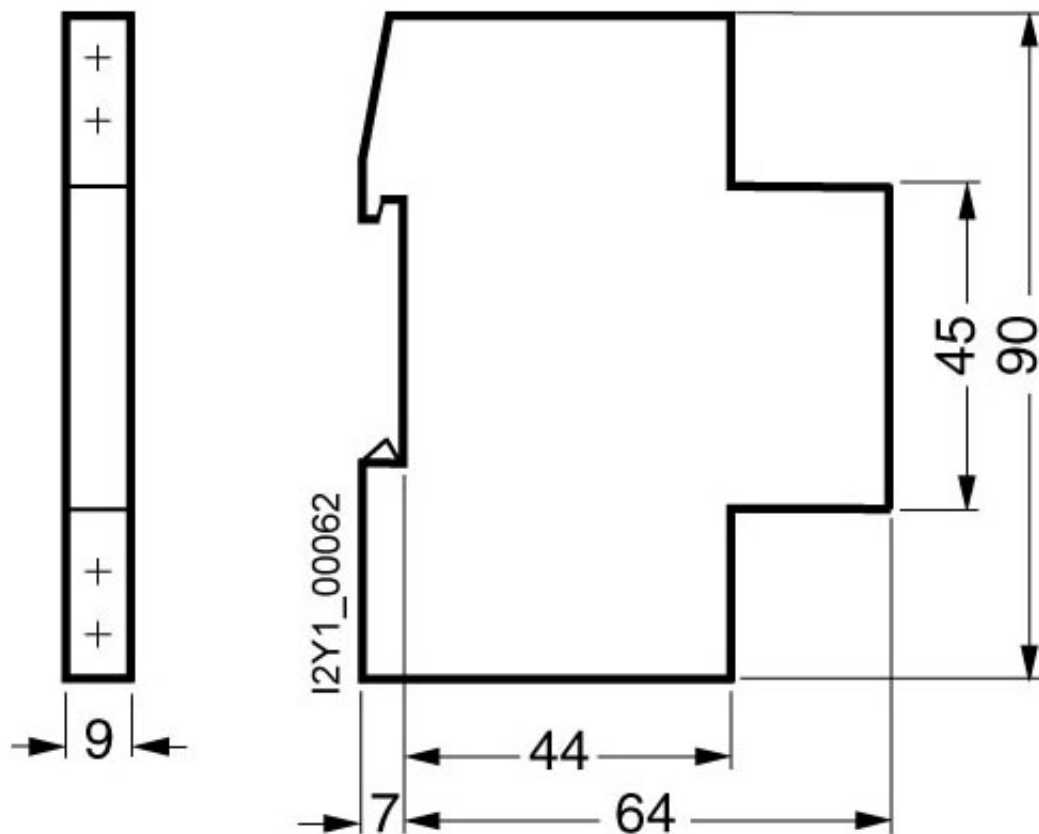

1321

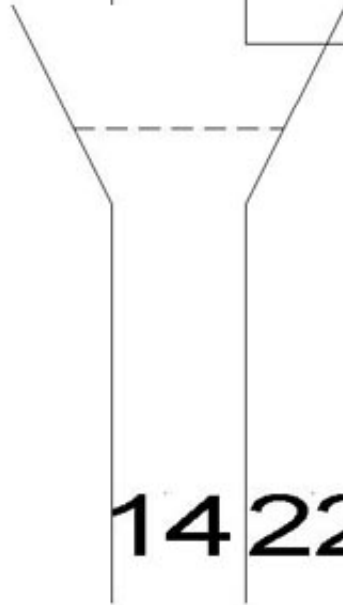

1422

last change:

Jan 18, 2012