



Figure similar

Ordering data

6SL3210-1NE21-8UL1

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data

Input

Number of phases	3 AC
Line voltage	380 ... 480 V $\pm 10\%$
Line frequency	47 ... 63 Hz
Rated current (LO)	18.60 A
Rated current (HO)	14.00 A

Output

Number of phases	3 AC
Rated voltage	400 V
Rated power (LO)	7.50 kW / 10.00 hp
Rated power (HO)	5.50 kW / 7.50 hp
Rated current (LO)	18.00 A
Rated current (HO)	13.20 A
Max. output current	27.00 A
Pulse frequency	4 kHz
Output frequency for vector control	0 ... 200 Hz
Output frequency for V/f control	0 ... 550 Hz

General tech. specifications

Power factor λ	0.90
Offset factor $\cos \phi$	0.95
Efficiency η	0.97
Sound pressure level (1m)	62 dB
Power loss	0.24 kW

Ambient conditions

Cooling	Internal air cooling
Cooling air requirement	0.009 m ³ /s
Installation altitude	1000 m
Ambient temperature	
Operation LO	-10 ... 40 °C (14 ... 104 °F)
Operation HO	-10 ... 50 °C (14 ... 122 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-40 ... 70 °C (-13 ... 131 °F)

Relative humidity

Max. operation	95 % RH, condensation not permitted
----------------	-------------------------------------

Overload capability

Low Overload (LO)

1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s 1.5 x rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s

High Overload (HO)

1.5 x output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 x output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s



Figure similar

Ordering data

6SL3210-1NE21-8UL1


Mechanical data

Degree of protection	IP20
Size	FSB
Net weight	6.30 kg
Width	100.0 mm
Height	292.0 mm
Depth	165.0 mm

Converter losses to EN 50598-2*

Efficiency class	IE2
------------------	-----

Comparison with the reference converter (90% / 100%) -69.18 %

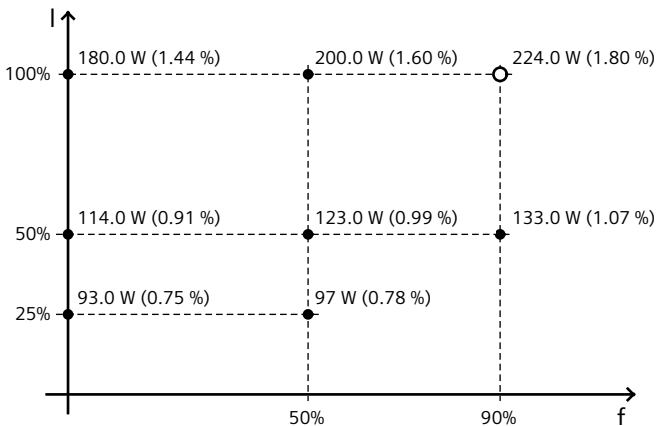

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*calculated values; increased by 10% according to the standard

Connections

Line side

Version Plug-in screw-type terminals

Conductor cross-section 1.50 ... 6.00 mm²

Motor end

Version Plug-in screw terminals

Conductor cross-section 1.50 ... 6.00 mm²

Max. motor cable length

Shielded 25 m

Unshielded 100 m

Standards

Compliance with standards UL, CE, C-Tick (RCM), KCC

CE marking Low-voltage directive 2006/95/EC