



---

# Inverter i500

# Lenze makes many things easy for you.

With our motivated and committed approach, we work together with you to create the best possible solution and set your ideas in motion - whether you are looking to optimize an existing machine or develop a new one. We always strive to make things easy and seek perfection therein. This is anchored in our thinking, in our services and in every detail of our products. It's as easy as that!

## Always perfect: the new i500

The i500 is recommended in applications for pumps and fans, conveyors, formers, winders, traveling drives, tool and hoist drives.



# Less means more!

Focused on the essentials: the new i500

i500 is the new inverter series - a streamlined design, scalable functionality, and it's exceptionally user-friendly.

## **Fewer unnecessary elements**

- High scalability in terms of the line voltage range, rated power and modular structure
- Supports all machine automation networks
- Diagnostics via keypad, USB or WLAN

## **Greater cost savings**

- Optimized solution for individual customer requirements
- Flexibility

## **Lower Size**

- Compact size: up to 15 Hp (11 kW) just 5.12 in (130 mm) deep and up to 3 Hp (2.2 kW) just 2.36 in (60 mm) wide
- Side-by-side installation with zero-clearance mounting

## **More space in the control cabinet**

- Provides solutions in limited spaces
- Smaller control cabinets reduce costs

## **Lower engineering expenditure**

- Intuitive menu structure
- Easy controller integration

## **More time for what really matters**

- Saves time in engineering
- Reduction in potential error sources

## **Lower installation expenses**

- Keyhole mounting
- Pluggable terminals
- Out-of-the-box operability, simply connect, start and run!
- Plug-in memory module

## **More productivity**

- Saves time during installation
- Faults easily identified in English text
- Lower costs in the event of service

## **Lower energy consumption**

- Fewer inverter losses thanks to the use of cutting-edge technologies
- Energy-efficient

## **More sustainability**

- Best efficiency values, lowest energy costs
- Future-proof thanks to DIN EN 50598

## **Lower downtime**

- Robust single board design
- Entire device produced by Lenze

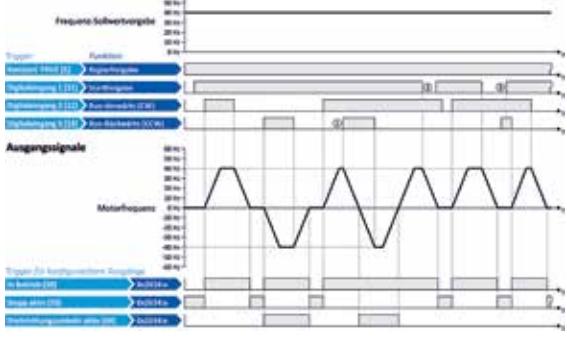
## **More reliability**

- Lower quality assurance costs in manufacturing
- Reduces operational guarantee costs



# Functionality

i500 provides a high-quality frequency inverter that already conforms to the future standard in accordance with the EN 50598-2 efficiency classes (IE). Overall, this provides a reliable and future-proof drive for a wide range of machine applications.

Adjustable motor controls for three-phase AC current motors	
	<ul style="list-style-type: none"> <li>• V/f characteristic control linear/quadratic (VFC plus)</li> <li>• Sensorless vector control (SLVC) (up to 45 kW)</li> <li>• Energy saving function (VFC eco) (up to 45 kW)</li> <li>• Servo control (SC-ASM) with feedback (up to 45 kW)</li> <li>• Sensorless vector control for synchronous motors (SL-PSM) (up to 45 kW)</li> </ul>
Motor functions	
	<ul style="list-style-type: none"> <li>• Flying restart circuit</li> <li>• Slip compensation</li> <li>• Energy saving function (VFC eco)</li> <li>• DC braking</li> <li>• Oscillation damping</li> <li>• Skip frequencies</li> <li>• Automatic identification of the motor data</li> <li>• Brake energy management</li> <li>• Holding brake control</li> <li>• Voltage-add function</li> <li>• Voltage-add function</li> <li>• Rational Energy Ride Through (backup operation in case of line voltage failure)</li> <li>• Speed feedback (HTL encoder)</li> <li>• Brake resistor control (brake chopper integrated)</li> <li>• DC-bus connection (480/400V devices)</li> </ul>
Application functions	
	<ul style="list-style-type: none"> <li>• Process controller</li> <li>• Process controller - sleep mode and rinse function</li> <li>• Freely assignable favorite menu</li> <li>• Parameter change-over</li> <li>• S-shaped ramps for smooth acceleration</li> <li>• Motor potentiometer</li> <li>• Flexible I/O configuration</li> <li>• Access protection</li> <li>• Automatic restart</li> <li>• OEM parameter set</li> </ul>

Monitoring																																																											
<table border="1"> <thead> <tr> <th>RDY</th><th>ERR</th><th>Status/meaning</th></tr> </thead> <tbody> <tr> <td>off</td><td>off</td><td>No supply voltage</td></tr> <tr> <td>1 Hz</td><td>██████</td><td>Safe torque off (STO) active.</td></tr> <tr> <td>██████</td><td>██████</td><td>Safe torque off (STO) active, warning active</td></tr> <tr> <td>██████</td><td>████</td><td>Inverter inhibited</td></tr> <tr> <td>██████</td><td>███</td><td>Inverter inhibited, no DC-bus voltage</td></tr> <tr> <td>██████</td><td>██</td><td>Inverter inhibited, warning active</td></tr> <tr> <td>██████</td><td></td><td>Inverter inhibited, error available</td></tr> <tr> <td>██████</td><td>██████</td><td>Inverter enabled and motor running</td></tr> <tr> <td>██████</td><td>████</td><td>Inverter enabled and motor running, warning pending</td></tr> <tr> <td>██████</td><td>██</td><td>Inverter enabled, quick stop as response to a fault active</td></tr> <tr> <td colspan="2"><b>Error message</b></td><td>Cause and remedy (W = warning, T = trouble, F = fault)</td></tr> <tr> <td>2382/2383</td><td></td><td>Ixt fault/Ixt warning</td></tr> <tr> <td>3210/3211</td><td></td><td>Overvoltage DC-bus/warning overvoltage DC-bus</td></tr> <tr> <td>3220/3221</td><td></td><td>DC-bus voltage too low for switch-on</td></tr> <tr> <td>3222</td><td></td><td>DC-bus voltage too low for switch-on</td></tr> <tr> <td>4310</td><td></td><td>Motor overtemperature fault</td></tr> <tr> <td>6280</td><td></td><td>Trigger/functions incorrectly connected. In flexible mode, the controller release or Run/Stop must be allocated to an I/O. Do not use start-forwards/backwards and run-forwards/backwards at the same time.</td></tr> <tr> <td>FF37</td><td></td><td>Automatic start inhibited</td></tr> </tbody> </table>			RDY	ERR	Status/meaning	off	off	No supply voltage	1 Hz	██████	Safe torque off (STO) active.	██████	██████	Safe torque off (STO) active, warning active	██████	████	Inverter inhibited	██████	███	Inverter inhibited, no DC-bus voltage	██████	██	Inverter inhibited, warning active	██████		Inverter inhibited, error available	██████	██████	Inverter enabled and motor running	██████	████	Inverter enabled and motor running, warning pending	██████	██	Inverter enabled, quick stop as response to a fault active	<b>Error message</b>		Cause and remedy (W = warning, T = trouble, F = fault)	2382/2383		Ixt fault/Ixt warning	3210/3211		Overvoltage DC-bus/warning overvoltage DC-bus	3220/3221		DC-bus voltage too low for switch-on	3222		DC-bus voltage too low for switch-on	4310		Motor overtemperature fault	6280		Trigger/functions incorrectly connected. In flexible mode, the controller release or Run/Stop must be allocated to an I/O. Do not use start-forwards/backwards and run-forwards/backwards at the same time.	FF37		Automatic start inhibited
RDY	ERR	Status/meaning																																																									
off	off	No supply voltage																																																									
1 Hz	██████	Safe torque off (STO) active.																																																									
██████	██████	Safe torque off (STO) active, warning active																																																									
██████	████	Inverter inhibited																																																									
██████	███	Inverter inhibited, no DC-bus voltage																																																									
██████	██	Inverter inhibited, warning active																																																									
██████		Inverter inhibited, error available																																																									
██████	██████	Inverter enabled and motor running																																																									
██████	████	Inverter enabled and motor running, warning pending																																																									
██████	██	Inverter enabled, quick stop as response to a fault active																																																									
<b>Error message</b>		Cause and remedy (W = warning, T = trouble, F = fault)																																																									
2382/2383		Ixt fault/Ixt warning																																																									
3210/3211		Overvoltage DC-bus/warning overvoltage DC-bus																																																									
3220/3221		DC-bus voltage too low for switch-on																																																									
3222		DC-bus voltage too low for switch-on																																																									
4310		Motor overtemperature fault																																																									
6280		Trigger/functions incorrectly connected. In flexible mode, the controller release or Run/Stop must be allocated to an I/O. Do not use start-forwards/backwards and run-forwards/backwards at the same time.																																																									
FF37		Automatic start inhibited																																																									
Diagnostics																																																											
		<ul style="list-style-type: none"> <li>Error history buffer</li> <li>Logbook</li> <li>LED status displays</li> <li>Keypad language selection German and English</li> </ul>																																																									
Safety functions (optional)																																																											
		<ul style="list-style-type: none"> <li>STO (Safe torque off) with performance level "e" and SIL 3</li> </ul>																																																									
Network (optional)																																																											
		<ul style="list-style-type: none"> <li>CANopen optional</li> <li>Modbus-RTU</li> <li>Modbus-TCP/IP</li> <li>EtherCAT</li> <li>EtherNet/IP</li> <li>PROFIBUS</li> <li>PROFINET</li> </ul>																																																									

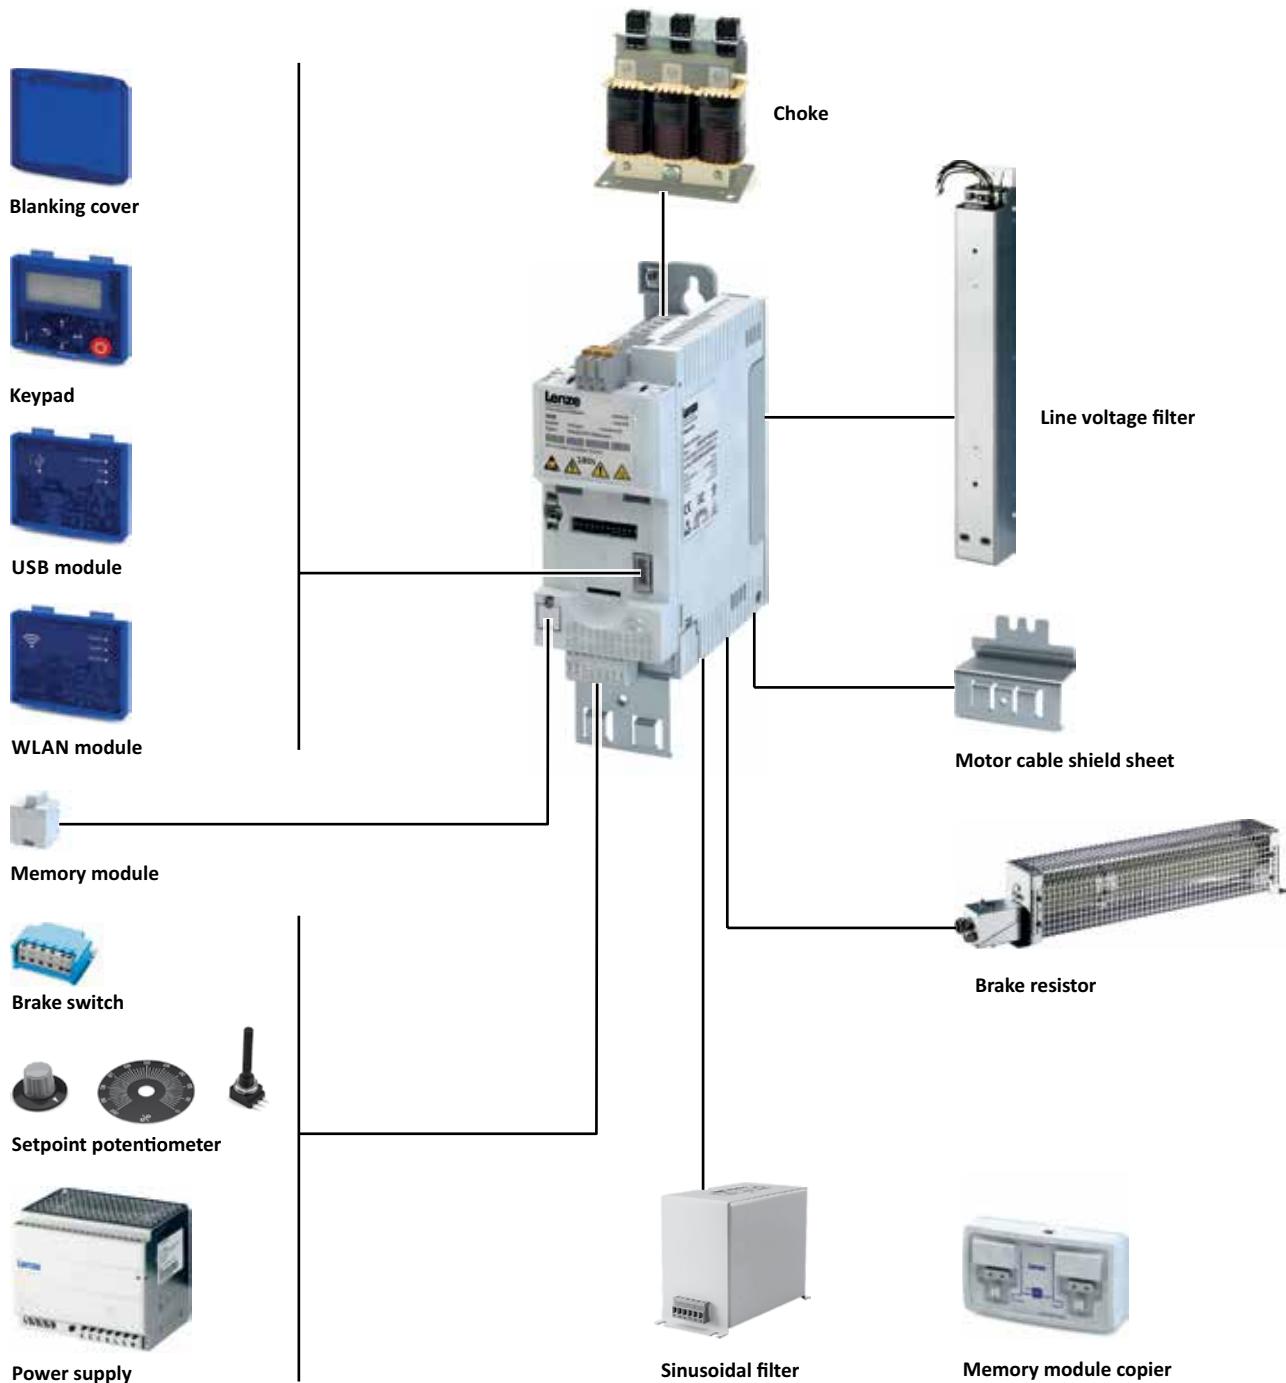
# Scalability

Easily scaled, the right i500 can be customized to suit the application. Here, “scaled” refers to two optimized products: the i510 as the basic design with predefined modes and the high-capacity modular i550 for a variety of applications. Which is the right one for you? See the following table:

	i510	i550
Type of construction and ordering options	Single board design	Modular construction
Power range	0.33 to 3 Hp (0.25 to 2.2 kW)	0.33 to 100 Hp (0.25 to 75 kW)
Scope	<b>Memory module</b> <ul style="list-style-type: none"> <li>IT network compatibility</li> <li>Integrated RFI filter</li> <li>Can be mounted directly in rows</li> <li>Relay (type C)</li> </ul>	<b>Memory module</b> <ul style="list-style-type: none"> <li>IT network compatibility</li> <li>Integrated RFI filter</li> <li>Can be mounted directly in rows</li> <li>Relay (type C)</li> <li>Brake chopper</li> <li>DC-bus operation possible</li> <li>HTL incremental encoder up to 100 kHz</li> <li>Temperature monitoring</li> <li>Functional safety (STO)</li> </ul>
I/O-extension	<ul style="list-style-type: none"> <li>Spring-type terminal</li> <li>Fixed terminals</li> <li>Basic-I/O <ul style="list-style-type: none"> <li>- 5 digital inputs, 1 digital output</li> <li>- 2 analog inputs, 1 analog output</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Pluggable spring-type terminal</li> <li>External 24 V supply</li> <li>Selectable negative or positive logic (PNP/NPN)</li> <li>Standard I/Os: <ul style="list-style-type: none"> <li>- 5 digital inputs, 1 digital output</li> <li>- 2 analog inputs, 1 analog outputs or</li> </ul> </li> <li>Application I/Os: <ul style="list-style-type: none"> <li>- 6 digital inputs, 2 digital outputs</li> <li>- 2 analog inputs, 2 analog outputs</li> </ul> </li> </ul>
Fieldbus network – optional	CANopen/Modbus	<ul style="list-style-type: none"> <li>CANopen</li> <li>Modbus</li> <li>EtherCAT</li> <li>EtherNet/IP</li> <li>PROFIBUS</li> <li>PROFINET</li> </ul>
Motor controls	<ul style="list-style-type: none"> <li>V/f characteristic control (VFC open loop; linear, quadratic, or VFC eco)</li> <li>Sensorless vector control (SLVC)</li> <li>Sensorless closed-loop control (SL-PSM) (up to 45 kW)</li> </ul>	<ul style="list-style-type: none"> <li>V/f characteristic control (VFC open loop; linear, quadratic, or VFC eco)</li> <li>Sensorless vector control (SLVC)</li> <li>Sensorless vector control for synchronous motors (SL-PSM)</li> <li>Servo control for asynchronous motors (SC-ASM)</li> <li>Vector control with feedback</li> </ul>

i510	i550			
 <p>Two versions:  <ul style="list-style-type: none"> <li>• with Basic I/O</li> <li>• with Basic I/O and CANopen/Modbus-RTU</li> </ul> </p>	 <p>PROFIBUS Modbus-RTU CANopen</p> <p>EtherNet/IP EtherCAT PROFINET Modbus TCP/IP</p>	<p>Control Unit Standard I/O</p> <p>Without network</p>	<p>Power unit</p>  <p>Safety module</p>	<p>Control Unit Application I/O</p> <p>Without network</p>

The scalable inverter is completed by an accessory kit. Simply select all the necessary components oriented to your application.



# Technical data

## Inverter i510

<b>Conformities</b>	CE	2014/35/EU, 2014/30/EU
	EAC	TR TC 004/2011, TP TC 020/2011
	RoHS 2	2011/65/EU
<b>Approvals</b>	UL	UL 61800-5-1
<b>Energy efficiency</b>	Class IE2	EN 50598-2
<b>Enclosure</b>	IP20	EN 60529
<b>Power system</b>	TT, TN	Voltage against earth: max. 300 V
	IT	Apply the measures described for IT systems!
<b>Line voltage switching</b>		3 x within one minute possible
<b>Operation with residual current circuit breaker</b>		up to 3 Hp (2.2 kW) 30 mA
<b>Cable length for EMC category C2</b>		66 ft (20 m)
<b>Switching frequencies</b>		2, 4, 8, 16 kHz, The rated output currents listed below apply at 45 degrees and the switching frequency at 2 & 4 kHz, and at 40 degrees and the switching frequency 8 and 16 kHz
<b>Ambient temperature</b>		-10 to +55°C (derating of 2.5% per °C above +45°C)
<b>Max. output frequency</b>		0 to 599 Hz
<b>Overload capacity</b>		200% for 3 s; 150% for 60 s

	Rated power	Line voltage range	Rated output current	Weight	Dimensions
			[A]	Ibs [kg]	in [mm] HxWxD
<b>One-phase inverter with integrated RFI filter</b>					
i510-C0.25/230-1	0.33 (0.25)	1/N/PE AC 170 to 264 V 45 to 65 Hz	1.7	1.76 (0.8)	6 x 2.4 x 5.12 (155 x 60 x 130)
i510-C0.37/230-1	0.50 (0.37)		2.4	1.76 (0.8)	6 x 2.4 x 5.12 (155 x 60 x 130)
i510-C0.55/230-1	0.75 (0.55)		3.2	2.2 (1)	7.1 x 2.4 x 5.12 (180 x 60 x 130)
i510-C0.75/230-1	1.0 (0.75)		4.2	2.2 (1)	7.1 x 2.4 x 5.12 (180 x 60 x 130)
i510-C1.1/230-1	1.5 (1.1)		6	3 (1.35)	9.8 x 2.4 x 5.12 (250 x 60 x 130)
i510-C1.5/230-1	2.0 (1.5)		7	3 (1.35)	9.8 x 2.4 x 5.12 (250 x 60 x 130)
<b>One/three-phase inverter without integrated RFI filter</b>					
i510-C0.25/230-2	0.33 (0.25)	1 and 3/N/PE AC 170 to 264 V 45 to 65 Hz	1.7	1.8 (0.8)	6 x 2.4 x 5.1 (155 x 60 x 130)
i510-C0.37/230-2	0.50 (0.37)		2.4	1.8 (0.8)	6 x 2.4 x 5.1 (155 x 60 x 130)
i510-C0.55/230-2	0.75 (0.55)		3.2	2.2 (1)	7.1 x 2.4 x 5.1 (180 x 60 x 130)
i510-C0.75/230-2	1.0 (0.75)		4.2	2.2 (1)	7.1 x 2.4 x 5.1 (180 x 60 x 130)
i510-C1.1/230-2	1.5 (1.1)		6	3 (1.35)	9.8 x 2.4 x 5.1 (250 x 60 x 130)
i510-C1.5/230-2	2.0 (1.5)		7	3 (1.35)	9.8 x 2.4 x 5.1 (250 x 60 x 130)
i510-C2.2/230-2	3.0 (2.2)		9.6	3 (1.35)	9.8 x 2.4 x 5.1 (250 x 60 x 130)
<b>Three-phase inverter with integrated RFI filter</b>					
i510-C0.37/400-3	0.50 (0.37)	3/PE AC 340 to 528 V 45 to 65 Hz	1.3	1.8 (0.8)	6 x 2.4 x 5.1 (155 x 60 x 130)
i510-C0.55/400-3	0.75 (0.55)		1.8	2.2 (1)	7.1 x 2.4 x 5.1 (180 x 60 x 130)
i510-C0.75/400-3	1.0 (0.75)		2.4	2.2 (1)	7.1 x 2.4 x 5.1 (180 x 60 x 130)
i510-C1.1/400-3	1.5 (1.1)		3.2	3 (1.35)	9.8 x 2.4 x 5.1 (250 x 60 x 130)
i510-C1.5/400-3	2.0 (1.5)		3.9	3 (1.35)	9.8 x 2.4 x 5.1 (250 x 60 x 130)
i510-C2.2/400-3	3.0 (2.2)		5.6	3 (1.35)	9.8 x 2.4 x 5.1 (250 x 60 x 130)
i510-C2.2/400-3	3.0 (2.2)		5.6	3 (1.35)	9.8 x 2.4 x 5.12 (250 x 60 x 130)

## Inverter i550

<b>Conformities</b>	CE	2014/35/EU, 2014/30/EU
	EAC	TR TC 004/2011, TP TC 020/2011
	RoHS 2	2011/65/EU
<b>Approvals</b>	UL	UL 61800-5-1
<b>Energy efficiency</b>	Class IE2	EN 50598-2
<b>Enclosure</b>	IP20	EN 60529
<b>Power system</b>	TT, TN	Voltage against earth: max. 300 V
	IT	Apply the measures described for IT systems!
<b>Line voltage switching</b>		3 x within one minute possible
<b>Operation with residual current circuit breaker</b>		up to 3.0 Hp (2.2 kW) 30 mA, above 300 mA
<b>Cable length for EMC category C2</b>		66 ft (20 m) (C1 up to 3 m at rated power of up to 3.0 Hp [2.2 kW])
<b>Switching frequencies</b>		2, 4, 8, 16 kHz, The rated output currents listed below apply at 45 degrees and the switching frequency at 2 & 4 kHz, and at 40 degrees and the switching frequency 8 and 16 kHz
<b>Ambient temperature</b>		-10 to +55°C (derating of 2.5% per °C above +45°C)
<b>Max. output frequency</b>		0 to 599 Hz
<b>Overload capacity</b>		200% for 3 s; 150% for 60 s

	Rated power Hp [kW]	Line voltage range [V]	Rated output current [A]	Weight	Dimensions
				lbs [kg]	in [mm] HxWxD
<b>One-phase inverter with integrated RFI filter</b>					
i550-C0.25/230-1	0.33 (0.25)	1/N/PE AC 170 to 264 V 45 to 65 Hz	1.7	1.76 (0.8)	6 x 2.4 x 5.12 (155 x 60 x 130)
i550-C0.37/230-1	0.50 (0.37)		2.4	1.76 (0.8)	6 x 2.4 x 5.12 (155 x 60 x 130)
i550-C0.55/230-1	0.75 (0.55)		3.2	2.2 (1)	7.1 x 2.4 x 5.12 (180 x 60 x 130)
i550-C0.75/230-1	1.0 (0.75)		4.2	2.2 (1)	7.1 x 2.4 x 5.12 (180 x 60 x 130)
i550-C1.1/230-1	1.5 (1.1)		6	3 (1.35)	9.8 x 2.4 x 5.12 (250 x 60 x 130)
i550-C1.5/230-1	2.0 (1.5)		7	3 (1.35)	9.8 x 2.4 x 5.12 (250 x 60 x 130)
i550-C2.2/230-1	3.0 (2.2)		9.6	3 (1.35)	9.8 x 2.4 x 5.12 (250 x 60 x 130)
<b>One/three-phase inverter without integrated RFI filter</b>					
i550-C0.25/230-2	0.33 (0.25)	1 and 3/N/PE AC 170 to 264 V 45 to 65 Hz	1.7	1.76 (0.8)	6 x 2.4 x 5.12 (155 x 60 x 130)
i550-C0.37/230-2	0.50 (0.37)		2.4	1.76 (0.8)	6 x 2.4 x 5.12 (155 x 60 x 130)
i550-C0.55/230-2	0.75 (0.55)		3.2	2.2 (1)	7.1 x 2.4 x 5.12 (180 x 60 x 130)
i550-C0.75/230-2	1.0 (0.75)		4.2	2.2 (1)	7.1 x 2.4 x 5.12 (180 x 60 x 130)
i550-C1.1/230-2	1.5 (1.1)		6	3 (1.35)	9.8 x 2.4 x 5.12 (250 x 60 x 130)
i550-C1.5/230-2	2.0 (1.5)		7	3 (1.35)	9.8 x 2.4 x 5.12 (250 x 60 x 130)
i550-C2.2/230-2	3.0 (2.2)		9.6	3 (1.35)	9.8 x 2.4 x 5.12 (250 x 60 x 130)
<b>Three-phase inverter with integrated RFI filter</b>					
i550-C4.0/230-3	5.0 (4)	3/N/PE 170 V to 264 V AC 45 Hz to 65 Hz	16.5	2.1	9.8 x 3.5 x 5.12 (250 x 90 x 130)
i550-C5.5/230-3	7.5 (5.5)		2.1		7.1 x 2.4 x 5.12 (180 x 60 x 130)
<b>Three-phase inverter with integrated RFI filter</b>					
i550-C0.37/400-3	0.50 (0.37)	3/PE AC 340 to 528 V 45 to 65 Hz	1.3	1.76 (0.8)	6 x 2.4 x 5.12 (155 x 60 x 130)
i550-C0.55/400-3	0.75 (0.55)		1.8	2.2 (1)	7.1 x 2.4 x 5.12 (180 x 60 x 130)
i550-C0.75/400-3	1.0 (0.75)		2.4	2.2 (1)	7.1 x 2.4 x 5.12 (180 x 60 x 130)
i550-C1.1/400-3	1.5 (1.1)		3.2	3 (1.35)	9.8 x 2.4 x 5.12 (250 x 60 x 130)
i550-C1.5/400-3	2.0 (1.5)		3.9	3 (1.35)	9.8 x 2.4 x 5.12 (250 x 60 x 130)
i550-C2.2/400-3	3.0 (2.2)		5.6	3 (1.35)	9.8 x 2.4 x 5.12 (250 x 60 x 130)
i550-C3/400-3	4.0 (3)		7.3	5.1 (2.3)	9.8 x 3.5 x 5.12 (250 x 90 x 130)
i550-C4/400-3	5.0 (4)		9.5	5.1 (2.3)	9.8 x 3.5 x 5.12 (250 x 90 x 130)
i550-C5.5/400-3	7.5 (5.5)		13	5.1 (2.3)	9.8 x 3.5 x 5.12 (250 x 90 x 130)
i550-C7.5/400-3	10.0 (7.5)		16.5	8.2 (3.7)	11.7 x 4.7 x 5.12 (297 x 120 x 130)
i550-C11/400-3	15.0 (11)		23.5	8.2 (3.7)	11.7 x 4.7 x 5.12 (297 x 120 x 130)
i550-C15/400-3	20.0 (15)		32	23 (10.3)	13.7 x 8.0 x 8.7 (347 x 204.5 x 222)
i550-C18/400-3	25.0 (18.5)		40	23 (10.3)	13.7 x 8.0 x 8.7 (347 x 204.5 x 222)
i550-C22/400-3	30.0 (22)		47	23 (10.3)	13.7 x 8.0 x 8.7 (347 x 204.5 x 222)
i550-C30/400-3	40.0 (30)		61	38 (17.2)	17.7 x 9.8 x 9.0 (450 x 250 x 230)
i550-C37/400-3	50.0 (37)		76	38 (17.2)	17.7 x 9.8 x 9.0 (450 x 250 x 230)
i550-C45/400-3	60.0 (45)		89	38 (17.2)	17.7 x 9.8 x 9.0 (450 x 250 x 230)
i550-C55/400-3	75.0 (55)		110	53 (24)	24.5 x 9.8 x 10.4 (623 x 250 x 265)
i550-C75/400-3	100 (75)		150	53 (24)	24.5 x 9.8 x 10.4 (623 x 250 x 265)

# Order code i500

i510 or i550: delivered as a complete inverter

For OEM applications, the drives can be ordered pre-configured as complete inverters up to 100 Hp.

## Ordering information for complete device

Example for inverter i550-C2.2/400-3:

Inverters	Order code					
• Three-phase line voltage connection 480/400 V	i55AE222F1	A	01	0	002S	
• Power 3 Hp (2.2 kW)						
• Safety function STO						
• Standard I/O with CANopen						
<b>Inverters</b>	<b>Order code</b>					
i5x0-C0.25/230-1	i5xAE125B1					
i5x0-C0.37/230-1	i5xAE137B1					
i5x0-C0.55/230-1	i5xAE155B1					
i5x0-C0.75/230-1	i5xAE175B1					
i5x0-C1.1/230-1	i5xAE211B1					
i5x0-C1.5/230-1	i5xAE215B1					
i5x0-C2.2/230-1	i5xAE222B1					
i5x0-C0.25/230-2	i5xAE125D1					
i5x0-C0.37/230-2	i5xAE137D1					
i5x0-C0.55/230-2	i5xAE155D1					
i5x0-C0.75/230-2	i5xAE175D1					
i5x0-C1.1/230-2	i5xAE211D1					
i5x0-C1.5/230-2	i5xAE215D1					
i5x0-C2.2/230-2	i5xAE222D1					
i5x0-C4.0/230-3	i5xAE240C1					
i5xAE255C1	i5xAE155F1					
i5x0-C0.75/400-3	i5xAE175F1					
i5x0-C1.1/400-3	i5xAE211F1					
i5x0-C1.5/400-3	i5xAE215F1					
i5x0-C2.2/400-3	i5xAE222F1					
i550-C3/400-3	i55AE230F1					
i550-C4/400-3	i55AE240F1					
i550-C5.5/400-3	i55AE255F1					
i550-C7.5/400-3	01					
i550-C11/400-3	i55AE311F1					
i550-C15/400-3	i55AE315F1					
i550-C18.5/400-3	i55AE318F1					
i550-C22/400-3	i55AE322F1					
i550-C30/400-3	i55AE330F1					
i550-C37/400-3	i55AE337F1					
i550-C45/400-3	i55AE345F1					
i550-C55/400-3	i55AE355F1					
i550-C75/400-3	i55AE375F1					
<b>Safety technology</b>						
i55AE375F1	0					
Safety technology	A					
<b>Without safety engineering</b>	0					
<b>Safety function STO</b>	A					
Control code		0				
Version		2.2		(1)		
<b>Global type, line voltage frequency 50 Hz</b>	0					
USA type, line voltage frequency 60 Hz	2.2	005S				
(1)						
Compact device types i510		006S				
<b>Basic I/Os</b>		000S				
Basic-I/O with CANopen/Modbus		001S				
mounted Control Unit on i550		001S				
Standard I/O without network		000S				
Application I/O without network		001S				
Standard I/O with CANopen		002S				
Standard I/O with Modbus-RTU		003S				
Standard I/O with PROFIBUS		004S				
Standard I/O with EtherCAT		00KS				
Standard I/O with PROFINET		00LS				
Standard I/O with EtherNet/IP		00MS				
Standard I/O with Modbus-TCP		00WS				

i550: delivery as components

If different product versions are required in the machine, the various components can be ordered individually. Depending on the application, the components can be plugged in together easily and without any additional tools.

## Ordering information for components

Example for inverter i550-C2.2/400-3:

Components	Order code
• Three-phase line voltage connection 480/400 V	i5DAE222F10010000S
• Power 100 Hp (75 kW)	i5MASA0000000S
Safety function STO	
Standard I/O with CANopen	i5CA5C020000A0000S

Power Unit inverter	Order code
i550-C0.25/230-1	i5DAE125B10010000S
i550-C0.37/230-1	i5DAE137B10010000S
i550-C0.55/230-1	i5DAE155B10010000S
i550-C0.75/230-1	i5DAE175B10010000S
i550-C1.1/230-1	i5DAE211B10010000S
i550-C1.5/230-1	i5DAE215B10010000S
i550-C2.2/230-1	i5DAE222B10010000S
i550-C0.25/230-2	i5DAE125D10010000S
i550-C0.37/230-2	i5DAE137D10010000S
i550-C0.55/230-2	i5DAE155D10010000S
i550-C0.75/230-2	i5DAE175D10010000S
i550-C1.1/230-2	i5DAE211D10010000S
i550-C1.5/230-2	i5DAE215D10010000S
i550-C2.2/230-2	i5DAE222D10010000S
i550-C4.0/230-3	i5DAE240C10010000S
i550-C5.5/230-3	i5DAE255C10010000S
i550-C0.37/400-3	i5DAE137F10010000S
i550-C0.55/400-3	i5DAE155F10010000S
i550-C0.75/400-3	i5DAE175F10010000S
i550-C1.1/400-3	i5DAE211F10010000S
i550-C1.5/400-3	i5DAE215F10010000S
i550-C2.2/400-3	i5DAE222F10010000S
i550-C3/400-3	i5DAE230F10010000S
i550-C4/400-3	i5DAE240F10010000S
i550-C5.5/400-3	i5DAE255F10010000S
i550-C7.5/400-3	i5DAE275F10010000S
i550-C11/400-3	i5DAE311F10010000S
i550-C15/400-3	i5DAE315F10010000S
i550-C18.5/400-3	i5DAE318F10010000S
i550-C22/400-3	i5DAE322F10010000S
i550-C30/400-3	i5DAE330F10010000S
i550-C37/400-3	i5DAE337F10010000S
i550-C45/400-3	i5DAE345F10010000S
i550-C55/400-3	i5DAE355F10010000S
i550-C75/400-3	i5DAE375F10010000S

Safety module	Order code
Safety function STO	i5MASA0000000S

Control unit	Order code
50 Hz	60 Hz
Standard I/O without network	i5CA50020000A0000S
Application I/O without network	i5CA50030000A0000S
Standard I/O with CANopen	i5CA5C020000A0000S
Standard I/O with Modbus (-RTU/-TCP/IP)	i5CA5W020000A0000S i5CA5V020000A0000S
Standard I/O with PROFIBUS	i5CA5P020000A0000S
Standard I/O with EtherCAT	i5CA5T020000A0000S
Standard I/O with PROFINET	i5CA5R020000A0000S
Standard I/O with EtherNet/IP	i5CA5G020000A0000S
Standard I/O with Modbus-TCP	i5CA5020000A1000S

# Product extensions


## Diagnostics and operation of the i510 and i550

For diagnostics and parameter setting, the keypad, Lenze-Smart-Keypad-App (available at the Google Play store) or the EASY Starter can be used.

Inverters	Keypad	WLAN	USB
			
i5x0-Cxxx/230-1 i5x0-Cxxx/230-2 i5x0-Cxxx/400-3	i5MADK0000000S	i5MADW0000000S	I5MADU0000000S 9.84 ft (3m) cable EWL0085/S 16.4 ft (5m) cable EWL0086/S

## Functional safety for the i550

The safety function STO can also be ordered at a later date and retrofitted.

Inverters	Safety function STO (Safe torque off)
	
i550-Cxxx/230-1 i550-Cxxx/230-2 i550-Cxxx/400-3	I5MASA0000000S

## Shield sheet for the i510 and i550

Accessories to safeguard the EMC if the motor shield is not installed on an earthing busbar in the control cabinet. From 20 Hp (15 kW), the shield sheet is included with the inverter on delivery.

Inverters	Shield mounting kit	
Inverter i510 and i550 0.33 Hp to 2.2 Hp (0.25 to 2.2 kW)	EZAMBHXM014M	5 x shield sheet 10 x mounting clip
Inverter i550 4.0 to 7.5 Hp (3.0 to 5.5 kW)	IEZAMBHXM015M	5 x shield sheet 10 x mounting clip
Inverter i550 10.0 to 15.0 Hp (7.5 to 11 kW)	EZAMBHXM016M	5 x shield sheet 10 x wire clamp (cable diameter .39 to .79 in [10 to 20 mm])

# Accessories

## Accessories i510

Inverters	Rated power Hp [kW]	Line voltage range [V]	Brake resistor	
			Order codes	Dimensions in [mm] HxWxD
<b>i510-C0.25/230-1</b>	0.33 (0.25)	1/N/PE AC 170 to 264 V 45 to 65 Hz	–	–
	0.50 (0.37)		–	–
	0.75 (0.55)		–	–
	1.0 (0.75)		–	–
	1.5 (1.1)		–	–
	2.0 (1.5)		–	–
	3.0 (2.2)		–	–
<b>i510-C0.25/230-2</b>	0.33 (0.25)	1 and 3 /N/PE AC 170 to 264 V 45 to 65 Hz	–	–
	0.50 (0.37)		–	–
	0.75 (0.55)		–	–
	1.0 (0.75)		–	–
	1.5 (1.1)		–	–
	2.0 (1.5)		–	–
	3.0 (2.2)		–	–
<b>i510-C0.37/400-3</b>	0.50 (0.37)	3/PE AC 340 to 528 V 45 to 65 Hz	–	–
	0.75 (0.55)		–	–
	1.0 (0.75)		–	–
	1.5 (1.1)		–	–
	2.0 (1.5)		–	–
	3.0 (2.2)		–	–

There are also additional accessory components available for the i510 inverter. You can find the complete range at [www.Lenze.com](http://www.Lenze.com).

	<b>Choke</b>	<b>RFI filters</b>			
		<b>Short distance</b>		<b>Long distance</b>	
	<ul style="list-style-type: none"> <li>Optional Reduction of effective line volt current</li> <li>Fewer current harmonics</li> </ul>	<ul style="list-style-type: none"> <li>C1 up to 82 ft (25 m)</li> <li>C2 up to 164 ft (50 m)</li> <li>Reduces leakage current (30 mA Fl)</li> </ul>		<ul style="list-style-type: none"> <li>C1 up to .164 ft (50 m)</li> <li>C2 up to .33 ft (100 m)</li> <li>Reduces leakage current (300 mA Fl)</li> </ul>	
<b>Order codes</b>	<b>Dimensions</b>	<b>Order codes</b>	<b>Dimensions</b>	<b>Order codes</b>	<b>Dimensions</b>
	in [mm] HxWxD		in [mm] HxWxD		in [mm] HxWxD
ELN1-0900H005	3.0 x 2.6 x 3.2 (75 x 66 x 82)	IOFAE175B100S0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)	IOFAE175B100D0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)
ELN1-0900H005	3.0 x 2.6 x 3.2 (75 x 66 x 82)	IOFAE175B100S0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)	IOFAE175B100D0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)
ELN1-0500H009	3.0 x 2.6 x 3.2 (75 x 66 x 82)	IOFAE175B100S0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)	IOFAE175B100D0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)
ELN1-0500H009	3.0 x 2.6 x 3.2 (75 x 66 x 82)	IOFAE175B100S0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)	IOFAE175B100D0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)
ELN1-0250H018	3.8 x 3.8 x 3.54 (96 x 96 x 90)	IOFAE222B100S0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)	IOFAE222B100D0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)
ELN1-0250H018	3.8 x 3.8 x 3.54 (96 x 96 x 90)	IOFAE222B100S0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)	IOFAE222B100D0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)
ELN1-0250H018	3.8 x 3.8 x 3.54 (96 x 96 x 90)	IOFAE222B100S0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)	IOFAE222B100D0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)
EZAELN3002B153	2.2 x 3.0 x 3.9 (56 x 77 x 100)				
EZAELN3004B742	2.4 x 3.74 x 4.5 (60 x 95 x 114)				
EZAELN3004B742	2.4 x 3.74 x 4.5 (60 x 95 x 114)				
EZAELN3006B492	2.4 x 3.74 x 4.6 (60 x 95 x 117)				
EZAELN3006B492	2.4 x 3.74 x 4.6 (60 x 95 x 117)				
EZAELN3008B372	3.34 x 4.72 x 5.4 (85 x 120 x 137)				
EZAELN3010B292	3.34 x 4.72 x 5.27 (85 x 120 x 134)				
EZAELN3002B153	2.2 x 3.0 x 3.9 (56 x 77 x 100)	IOFAE175F100S0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)	IOFAE175F100D0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)
EZAELN3004B742	2.4 x 3.74 x 4.5 (60 x 95 x 114)	IOFAE175F100S0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)	IOFAE175F100D0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)
EZAELN3004B742	2.4 x 3.74 x 4.5 (60 x 95 x 114)	IOFAE175F100S0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)	IOFAE175F100D0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)
EZAELN3004B742	2.4 x 3.74 x 4.5 (60 x 95 x 114)	IOFAE222F100S0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)	IOFAE222F100D0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)
EZAELN3004B742	2.4 x 3.74 x 4.5 (60 x 95 x 114)	IOFAE222F100S0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)	IOFAE222F100D0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)
EZAELN3006B492	2.4 x 3.74 x 4.6 (60 x 95 x 117)	IOFAE222F100S0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)	IOFAE222F100D0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)

# Accessories

## Accessories i550

Inverters	Rated power Hp [kW]	Line voltage range [V]	Brake resistor	
			Order codes	Dimensions in [mm] HxWxD
				
i550-C0.25/230-1	0.33 (0.25)	1/N/PE AC 170 to 264 V 45 to 65 Hz	ERBM180R050W	6.9 x 0.8 x 1.6 (175 x 20.6 x 40)
i550-C0.37/230-1	0.50 (0.37)		ERBM180R050W	6.9 x 0.8 x 1.6 (175 x 20.6 x 40)
i550-C0.55/230-1	0.75 (0.55)		ERBM100R100W	9.4 x 3.1 x 3.7 (240 x 80 x 95)
i550-C0.75/230-1	1.0 (0.75)		ERBM100R100W	9.4 x 3.1 x 3.7 (240 x 80 x 95)
i550-C1.1/230-1	1.5 (1.1)		ERBP033R200W	9.4 x 1.6 x 4.8 (240 x 41 x 122)
i550-C1.5/230-1	2.0 (1.5)		ERBP033R200W	9.4 x 1.6 x 4.8 (240 x 41 x 122)
i550-C2.2/230-1	3.0 (2.2)		ERBP033R200W	12.6 x 1.6 x 4.8 (320 x 41 x 122)
i550-C0.25/230-2	0.33 (0.25)	1 and 3 /N/PE AC 170 to 264 V 45 to 65 Hz	ERBM180R050W	6.9 x 0.8 x 1.6 (175 x 20.6 x 40)
i550-C0.37/230-2	0.50 (0.37)		ERBM180R050W	6.9 x 0.8 x 1.6 (175 x 20.6 x 40)
i550-C0.55/230-2	0.75 (0.55)		ERBM100R100W	9.4 x 3.1 x 3.7 (240 x 80 x 95)
i550-C0.75/230-2	1.0 (0.75)		ERBM100R100W	9.4 x 3.1 x 3.7 (240 x 80 x 95)
i550-C1.1/230-2	1.5 (1.1)		ERBP033R200W	9.4 x 1.6 x 4.8 (240 x 41 x 122)
i550-C1.5/230-2	2.0 (1.5)		ERBP033R300W	9.4 x 1.6 x 4.8 (240 x 41 x 122)
i550-C2.2/230-2	3.0 (2.2)		ERBP033R200W	12.6 x 1.6 x 4.8 (320 x 41 x 122)
i550-C4.0/230-3	5.0 (4)		ERBS015R800W	28 x 4.33 x 4.13 (710 x 110 x 105)
i550-C5.5/230-3	7.5 (5.5)		ERBS015R800W	28 x 4.33 x 4.13 (710 x 110 x 105)
i550-C0.37/400-3	0.50 (0.37)	3/PE AC 340 to 528 V 45 to 65 Hz	ERBM390R100W	9.3 x 0.8 x 1.6 (235 x 20.6 x 40)
i550-C0.55/400-3	0.75 (0.55)		ERBM390R100W	9.3 x 0.8 x 1.6 (235 x 20.6 x 40)
i550-C0.75/400-3	1.0 (0.75)		ERBM390R100W	9.3 x 0.8 x 1.6 (235 x 20.6 x 40)
i550-C1.1/400-3	1.5 (1.1)		ERBP180R200W	9.4 x 1.6 x 4.8 (240 x 41 x 122)
i550-C1.5/400-3	2.0 (1.5)		ERBP180R200W	9.4 x 1.6 x 4.8 (240 x 41 x 122)
i550-C1.5/400-3	3.0 (2.2)		ERBP180R200W	9.4 x 1.6 x 4.8 (240 x 41 x 122)
i550-C3.0/400-3	4.0 (3)		ERBP082R200W	12.6 x 1.6 x 4.8 (320 x 41 x 122)
i550-C4.0/400-3	5.0 (4)		ERBP047R200W	12.6 x 1.6 x 4.8 (320 x 41 x 122)
i550-C5.5/400-3	7.5 (5.5)		ERBP047R200W	12.6 x 1.6 x 4.8 (320 x 41 x 122)
i550-C7.5/400-3	10.0 (7.5)		ERBP027R200W	12.6 x 1.6 x 4.8 (320 x 41 x 122)
i550-C11/400-3	15.0 (11)		ERBP027R200W	12.6 x 1.6 x 4.8 (320 x 41 x 122)
i550-C15/400-3	20.0 (15)		ERBS018R800W	28 x 4.3 x 4.1 (710 x 110 x 105)
i550-C18/400-3	25.0 (18.5)		ERBS015R800W	28 x 4.3 x 4.1 (710 x 110 x 105)
i550-C22/400-3	30.0 (22)		ERBS015R800W	28 x 4.3 x 4.1 (710 x 110 x 105)
i550-C30/400-3	40.0 (30)		ERBG075D01K9	19.1 x 9.3 x 11.9 (486 x 236 x 302)
i550-C37/400-3	50.0 (37)		ERBG075D01K9	19.1 x 9.3 x 11.9 (486 x 236 x 302)
i550-C45/400-3	60.0 (45)		ERBG075D01K9	19.1 x 9.3 x 11.9 (486 x 236 x 302)
i550-C55/400-3	75.0 (55)		ERBG075D01K9	19.1 x 9.3 x 11.9 (486 x 236 x 302)
i550-C75/400-3	100 (75)		ERBG075D01K9	19.1 x 9.3 x 11.9 (486 x 236 x 302)

There are also additional accessory components available for the i550 inverter. You can find the complete range at [www.Lenze.com](http://www.Lenze.com).

Choke		RFI filters			
		Short distance		Long distance	
<ul style="list-style-type: none"> <li>Optional up to 25 Hp (18.5 kW), required from 30 Hp (22 kW)</li> <li>Reduction of effective line volt current</li> <li>Fewer current harmonics</li> </ul>		<ul style="list-style-type: none"> <li>C1 up to 82 ft (25 m)</li> <li>C2 up to 164 ft (50 m)</li> <li>Reduces leakage current (30 mA FI)</li> </ul>		<ul style="list-style-type: none"> <li>C1 up to 164 ft (50 m)</li> <li>C2 up to 328 ft (100 m)</li> <li>Reduces leakage current (300 mA FI)</li> </ul>	
Order codes	Dimensions	Order codes	Dimensions	Order codes	Dimensions
	in [mm] HxWxD		in [mm] HxWxD		in [mm] HxWxD
ELN1-0900H005	3.0 x 2.6 x 3.2 (75 x 66 x 82)	IOFAE175B100S0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)	IOFAE175B100D0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)
ELN1-0900H005	3.0 x 2.6 x 3.2 (75 x 66 x 82)	IOFAE175B100S0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)	IOFAE175B100D0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)
ELN1-0500H009	3.0 x 2.6 x 3.2 (75 x 66 x 82)	IOFAE175B100S0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)	IOFAE175B100D0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)
ELN1-0500H009	3.0 x 2.6 x 3.2 (75 x 66 x 82)	IOFAE175B100S0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)	IOFAE175B100D0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)
ELN1-0250H018	3.8 x 3.8 x 3.5 (96 x 96 x 90)	IOFAE222B100S0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)	IOFAE222B100D0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)
ELN1-0250H018	3.8 x 3.8 x 3.5 (96 x 96 x 90)	IOFAE222B100S0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)	IOFAE222B100D0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)
ELN1-0250H018	3.8 x 3.8 x 3.5 (96 x 96 x 90)	IOFAE222B100S0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)	IOFAE222B100D0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)
EZAELN3002B153	2.2 x 3.0 x 3.9 (56 x 77 x 100)				
EZAELN3004B742	2.4 x 3.7 x 4.5 (60 x 95 x 114)				
EZAELN3004B742	2.4 x 3.7 x 4.5 (60 x 95 x 114)				
EZAELN3006B492	2.7 x 3.7 x 4.6 (69 x 95 x 117)				
EZAELN3006B492	2.7 x 3.7 x 4.6 (69 x 95 x 117)				
EZAELN3008B372	3.3 x 4.7 x 5.4 (85 x 120 x 137)				
EZAELN3010B292	3.3 x 4.7 x 5.3 (85 x 120 x 134)				
EZAELN3016B182	3.74 x 4.72 x 5.27 (95 x 120 x 134)				
EZAELN3025B122	4.33 x 6.1 x 6.57 (110 x 155 x 167)				
EZAELN3002B153	2.2 x 3.0 x 3.9 (56 x 77 x 100)	IOFAE175F100S0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)	IOFAE175F100D0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)
EZAELN3004B742	2.4 x 3.7 x 4.5 (60 x 95 x 114)	IOFAE175F100S0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)	IOFAE175F100D0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)
EZAELN3004B742	2.4 x 3.7 x 4.5 (60 x 95 x 114)	IOFAE175F100S0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)	IOFAE175F100D0000S	10.8 x 2.4 x 2.0 (276 x 60 x 50)
EZAELN3004B742	2.4 x 3.7 x 4.5 (60 x 95 x 114)	IOFAE222F100S0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)	IOFAE222F100D0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)
EZAELN3004B742	2.4 x 3.7 x 4.5 (60 x 95 x 114)	IOFAE222F100S0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)	IOFAE222F100D0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)
EZAELN3006B492	2.7 x 3.7 x 4.6 (69 x 95 x 117)	IOFAE222F100S0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)	IOFAE222F100D0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)
EZAELN3008B372	3.3 x 4.7 x 5.4 (85 x 120 x 137)	IOFAE255F100S0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)	IOFAE255F100D0000S	13.6 x 2.4 x 2.0 (346 x 60 x 50)
EZAELN3010B292	3.3 x 4.7 x 5.3 (85 x 120 x 134)	IOFAE255F100S0000S	13.6 x 3.5 x 2.4 (346 x 90 x 60)	IOFAE255F100D0000S	13.6 x 3.5 x 2.4 (346 x 90 x 60)
EZAELN3016B182	3.7 x 4.7 x 5.3 (95 x 120 x 134)	IOFAE255F100S0000S	13.6 x 3.5 x 2.4 (346 x 90 x 60)	IOFAE255F100D0000S	13.6 x 3.5 x 2.4 (346 x 90 x 60)
EZAELN3020B152	3.7 x 6.1 x 6.4 (95 x 155 x 162)	IOFAE311F100S0000S	14.6 x 4.7 x 2.4 (371 x 120 x 60)	IOFAE311F100D0000S	14.6 x 4.7 x 2.4 (371 x 120 x 60)
EZAELN3025B122	4.3 x 6.1 x 6.6 (110 x 155 x 167)	IOFAE311F100S0000S	14.6 x 4.7 x 2.4 (371 x 120 x 60)	IOFAE311F100D0000S	14.6 x 4.7 x 2.4 (371 x 120 x 60)
EZAELN3035B841	4.3 x 6.1 x 6.6 (110 x 155 x 167)	E84AZESR1834LD	14.4 x 8.1 x 3.5 (365 x 205 x 90)	E84AZESR1834LD	14.4 x 8.1 x 3.5 (365 x 205 x 90)
EZAELN3045B651	4.4 x 7.3 x 7.7 (112 x 185 x 196)	E84AZESR1834LD	14.4 x 8.1 x 3.5 (365 x 205 x 90)	E84AZESR1834LD	14.4 x 8.1 x 3.5 (365 x 205 x 90)
EZAELN3050B591	4.4 x 7.3 x 8.2 (112 x 185 x 208)	E84AZESM2234LD	14.4 x 8.1 x 3.5 (365 x 205 x 90)	E84AZESM2234LD	14.4 x 8.1 x 3.5 (365 x 205 x 90)
EZAELN3063B471	4.8 x 7.3 x 8.1 (122 x 185 x 207)	E84AZESM3034LD	20.4 x 9.8 x 4.1 (519 x 250 x 105)	E84AZESM3034LD	20.4 x 9.8 x 4.1 (519 x 250 x 105)
EZAELN3080B371	4.9 x 8.3 x 9.4 (125 x 210 x 239)	E84AZESM3734LD	20.4 x 9.8 x 4.1 (519 x 250 x 105)	E84AZESM3734LD	20.4 x 9.8 x 4.1 (519 x 250 x 105)
EZAELN3090B331	4.5 x 10.5 x 7.9 (115 x 267 x 201)	E84AZESM4534LD	20.4 x 9.8 x 4.1 (519 x 250 x 105)	E84AZESM4534LD	20.4 x 9.8 x 4.1 (519 x 250 x 105)
EZAELN3100B301	5.5 x 10.5 x 7.9 (139 x 267 x 201)				
EZAELN3160B191	11.5 x 5.9 x 8.3 (291 x 149 x 210)				

Lenze Drives GmbH  
Postfach 10 13 52  
D-31763 Hameln  
Germany  
Phone +49 05154 82-0  
Fax +49 05154 82-2800  
Mail Lenze@Lenze.com  
Web www.Lenze.com

Lenze Americas Corporations  
630 Douglas Street  
Uxbridge, MA 01569

Lenze Americas - North America Logistics Center  
125 Wall Street  
Glendale Heights, IL 60139

Phone +1 800-217-9100  
Email techsupport.us@lenze.com  
Web www.Lenze.com

**Lenze**