
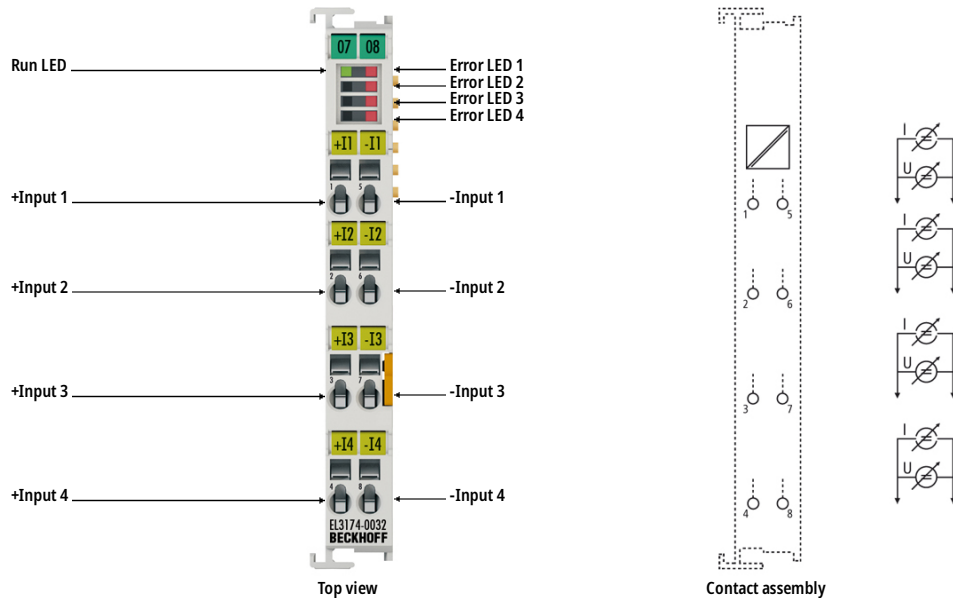


EL3174-0032 | EtherCAT Terminal, 4-channel analog input, multi-function, ± 3 V, ± 20 mA, 16 bit, differential



i Product status: Regular delivery

The EL3174-0032 analog input terminal has four individually parameterisable inputs. Signals in the range from $-3...+3$ V or from $-20/0/+4...+20$ mA can be processed by each channel. Each channel should be set via the controller to U or I mode via CoE. The input voltage or current is digitised with a resolution of 16 bit, and is transmitted electrically isolated to the higher-level automation device. With a technical measuring range of 107 % of the nominal range, the terminal also supports commissioning with sensor values in the limit range and an evaluation according to NAMUR NE43. The four differential inputs are electrically isolated against each other and against the fieldbus (2500 V DC).

Product information

Technical Data

Technical data	EL3174-0032
Number of inputs	4
Power supply	via the E-bus
Technology	differential input, channels electrically isolated
Signal type	differential
Oversampling factor	–
Distributed clocks	yes
Distributed clock precision	$<< 1 \mu\text{s}$

Internal resistance	> 200 k Ω typ. 85 Ω
Input filter limit frequency	5 kHz
Conversion time	minimum 150 μ s
Measuring range, nominal	-3...+3 V -20/0/+4...+20 mA
Measuring range, technical	-3.21...+3.21 V -21.47...+21.47 mA
Resolution	16 bit (incl. sign)
Measuring error	< \pm 0.2 % (at 25 $^{\circ}$ C \pm 5 $^{\circ}$ C, or else < \pm 0.3 %, relative to full scale value)
Electrical isolation	2500 V functional isolation (test voltage channel/channel and channel/fieldbus, production test)
Current consumption power contacts	-
Current consumption E-bus	typ. 150 mA
Bit width in the process image	inputs: 16 byte
Configuration	no address or configuration setting
Special features	U/I parameterisable, ExtendedRange, standard and compact process image, activatable FIR/IIR filters
Weight	approx. 65 g
Operating/storage temperature	-25...+60 $^{\circ}$ C/-40...+85 $^{\circ}$ C
Relative humidity	95 %, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. class/installation pos.	IP 20/variable
Approvals/markings	CE, UL, ATEX, DNV GL, IECEx, cFMus
Ex marking	cFMus: Class I, Division 2, Groups A, B, C, D Class I, Zone 2, AEx ec IIC T4 Gc

Housing data	EL-12-8pin
Design form	compact terminal housing with signal LEDs
Material	polycarbonate
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock
Side by side mounting by means of	double slot and key connection
Marking	Labeling of the BZxxx series
Wiring	solid conductor (e), flexible conductor (f) and ferrule (a): spring actuation by screwdriver
Connection cross-section	s*: 0.08...2.5 mm ² , st*: 0.08...2.5 mm ² , f*: 0.14...1.5 mm ²
Connection cross-section AWG	s*: AWG 28...14, st*: AWG 28...14, f*: AWG 26...16

Stripping length	8...9 mm
Current load power contacts	I_{\max} : 10 A

*s: solid wire; st: stranded wire; f: with ferrule