
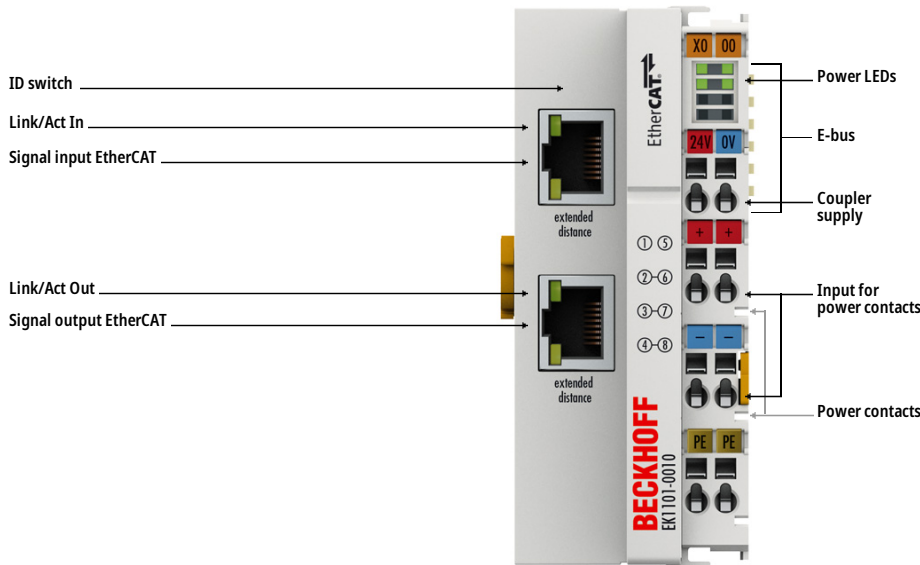


EK1101-0010 | EtherCAT Coupler with ID switch, Extended Distance



i Product status: Regular delivery

The EK1101-0010 EtherCAT Coupler is the link between the EtherCAT protocol at fieldbus level and the EtherCAT Terminals. The coupler converts the passing telegrams from Ethernet 100BASE-TX to E-bus signal representation. A station consists of a coupler and any number of EtherCAT Terminals that are automatically detected and individually displayed in the process image.

Special features:

- Connection technology: 2 x RJ45 sockets
- Connection lengths: up to 300 m
- Three ID switches for implementing variable topologies
- Number of EtherCAT Terminals in the overall system: up to 65,535

The EK1101-0010 has two RJ45 sockets and three hexadecimal ID switches. The upper Ethernet interface is used to connect the coupler to the network; the lower socket serves for the optional connection of further EtherCAT devices in the same segment. With the Extended Distance connection, distances of up to 300 m can be reached between two Extended Distance devices. If only one connection is configured for Extended Distance, the maximum distance between the stations is 100 m. A group of EtherCAT components is assigned a unique ID via the hexadecimal ID switches. This group can then be located at any position within the EtherCAT network. Variable topologies are therefore easily implementable. In addition, an EtherCAT junction or an EtherCAT extension can be used for the extension or for setting up a line or star topology.

The system and field supply, each 24 V DC, is provided directly at the coupler. The attached EtherCAT Terminals are supplied with the current required for communication from the supplied system voltage. The coupler can supply a maximum of 5 V and 2 A. If higher current is required, power feed terminals such as the EL9410 have to be integrated. The field supply is forwarded to the individual I/O components via the power contacts with up to 10 A.

Product information

Technical data

Technical data	EK1101-0010
Task within EtherCAT system	coupling of EtherCAT Terminals (ELxxxx) to 100BASE-TX EtherCAT networks, with identity verification
Data transfer medium	Ethernet/EtherCAT cable (copper, min. Cat.5, 4-wire, AWG22), shielded
Distance between stations	max. 300 m
Number of EtherCAT Terminals	up to 65,534
Type/number of peripheral signals	max. 4.2 GB addressable I/O points
Number of configurable IDs	4096
Protocol	EtherCAT
Delay	approx. 1 μ s
Data transfer rates	100 Mbit/s
Configuration	not required
Bus interface	2 x RJ45
Power supply	24 V DC (-15 %/+20 %)
Current consumption from U _s	90 mA + (Σ E-bus current/4)
Current consumption from U _p	load
Current supply E-bus	2000 mA
Power contacts	max. 24 V DC/max. 10 A
Electrical isolation	500 V (power contact/supply voltage/Ethernet)
Weight	approx. 105 g
Operating/storage temperature	0...+55 °C/-25...+85 °C
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Relative humidity	95 %, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
Protect. rating/installation pos.	IP20/variable
Approvals/markings	CE

Housing data	EK-44-8pin
Design form	compact terminal housing with signal LEDs
Material	polycarbonate
Dimensions (W x H x D)	44 mm x 100 mm x 68 mm
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock
Side by side mounting by means of	double slot and key connection

Marking	labeling of the BZxxx series
Wiring	solid conductor (e), flexible conductor (f) and ferrule (a): spring actuation by screwdriver
Connection cross-section	s*: 0.08...2.5 mm ² , st*: 0.08...2.5 mm ² , f*: 0.14...1.5 mm ²
Connection cross-section AWG	s*: AWG 28...14, st*: AWG 28...14, f*: AWG 26...16
Stripping length	8...9 mm
Current load power contacts	I _{max} : 10 A

*s: solid wire; st: stranded wire; f: with ferrule