
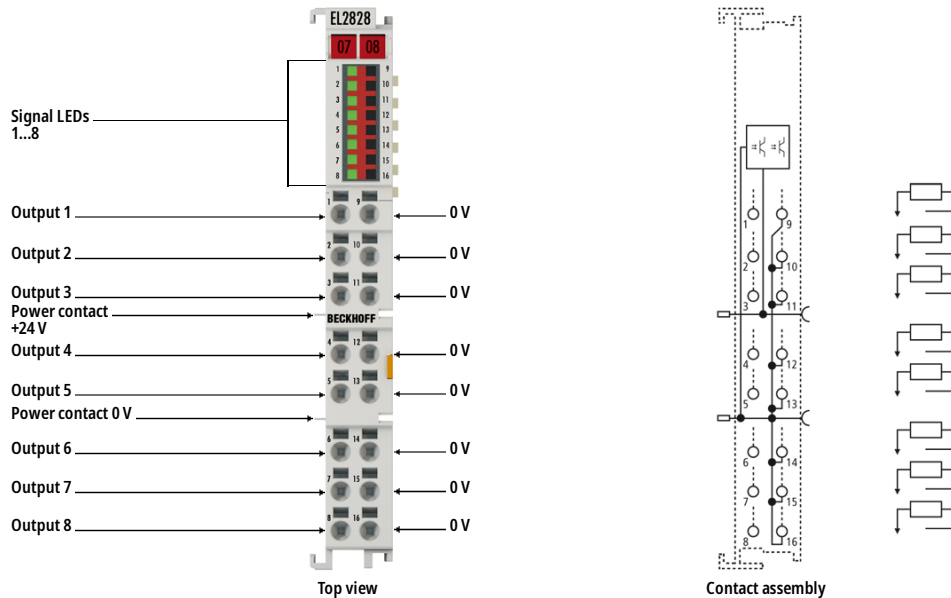


# EL2828 | EtherCAT Terminal, 8-channel digital output, 24 V DC, 2 A



**i** **Product status:** regular delivery

The EL2828 digital output terminal connects the binary 24 V DC control signals from the automation device on to the actuators at the process level with electrical isolation. The EtherCAT Terminal contains eight channels whose signal state is indicated by LEDs. The power contacts are connected through. In the EL2828 the outputs are supplied via the 24 V DC power contact.

Special features:

- Connection of different load types possible (ohmic, inductive, capacitive)
- Max. output current of 2 A per channel ( $\Sigma$  10 A)
- Overload and short-circuit proof outputs and reverse polarity protection
- Tool-free connection by direct plug-in technology for solid wire conductors

## Product information

### Technical data

Technical data	EL2828
Connection technology	2-wire
Number of outputs	8
Nominal voltage	24 V DC (-15%/+20%)
Load type	ohmic, inductive, capacitive
Distributed clocks	–

Max. output current	2 A per channel ( $\Sigma$ 10 A)
Short-circuit current	typ. < 40 A
Reverse voltage protection	yes
Breaking energy	< 1.2 J/channel
Switching times	typ. T <sub>ON</sub> : 60 $\mu$ s, typ. T <sub>OFF</sub> : 250 $\mu$ s
Current consumption E-bus	typ. 110 mA
Electrical isolation	500 V (E-bus/field potential)
Current consumption power contacts	typ. 15 mA + load
Bit width in the process image	8 outputs
Configuration	no address or configuration setting
Weight	approx. 70 g
Operating/storage temperature	-25...+60°C/-40...+85°C
Relative humidity	95%, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. rating/installation pos.	IP20/vertical
Approvals/markings	CE, UL

<b>Housing data</b>	EL-12-16pin
Design form	HD (High Density) housing with signal LEDs
Material	polycarbonate
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock
Side by side mounting by means of	double slot and key connection
Marking	labeling of the BZxxx series
Wiring	solid conductors (s): direct plug-in technique; fine-stranded conductors (st) and ferrule (f): spring actuation by screwdriver
Connection cross-section	s*: 0.08...1.5 mm <sup>2</sup> , st*: 0.25...1.5 mm <sup>2</sup> , f*: 0.14...0.75 mm <sup>2</sup>
Connection cross-section AWG	s*: AWG28...16, st*: AWG22...16, f*: AWG26...19
Stripping length	8...9 mm
Current load power contacts	I <sub>max</sub> : 10 A

\*s: solid wire; st: stranded wire; f: with ferrule