


# Measuring current transformers of the W... series

## Measuring current transformers of the W...-8000 series

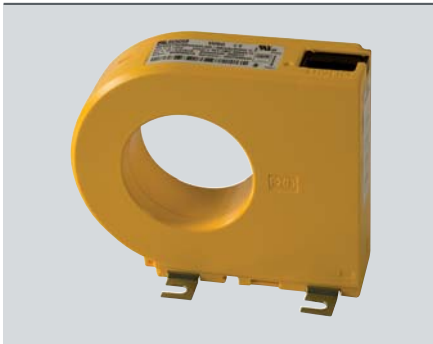

Measuring current transformers W60 – W60-8000

### Product description


W... and W...-8000 series measuring current transformers of the are highly sensitive measuring current transformers which measure AC currents and convert them into evaluable measurement signals, in combination with RCM resp. RCMS series residual current monitors and evaluators.

In addition, the measuring current transformers can be used in combination with insulation fault location systems (EDS) for IT systems. They are designed to measure the test current generated by a PGH insulation fault test device or an A-ISOMETER® IRDH. In combination with EDS series insulation fault evaluators the test current is converted into evaluable signals. Connection to the respective devices is via a two-wire cable.

### Installation instructions

- Make sure that all live conductors are routed through the measuring current transformer
- Do not route shielded conductors through the measuring current transformer
- Never route a PE conductor through the measuring current transformer!

### Wiring diagram

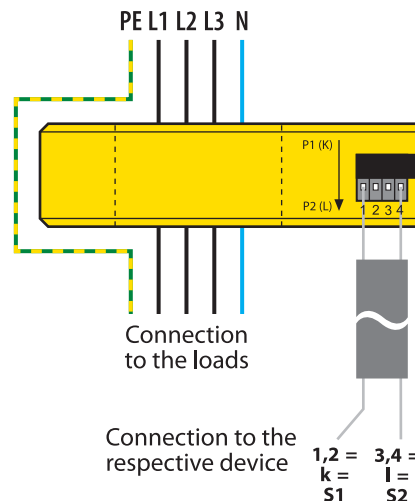

### W... measuring current transformers

Connection to the respective RCMS series residual current monitoring system, RCM series residual current monitor or to an EDS series insulation fault location system.

### W...-8000 measuring current transformers

Connection to the respective insulation fault evaluators EDS473(E)-12, EDS474(E)-12, EDS461 and / or EDS491.

### Device features

#### Measuring current transformers W...


- For RCMS460 / 490 series residual current monitoring systems
- For RCM420, RCM460 and RCM470 series residual current monitors
- For EDS460 / 490 and EDS470 series insulation fault location systems

#### Measuring current transformers W...-8000

- For EDS473(E)-12, EDS474(E)-12, EDS461 and EDS491 series insulation fault evaluators

### Approvals and certifications





**Technical data**

**Insulation coordination acc. to IEC 60664-1 / IEC 60664-3**

Rated insulation voltage	800 V
Rated impulse voltage / pollution degree	8 kV / III

**CT circuit W...**

Rated primary residual current	10 mA...10 A
Rated secondary residual current	0.0167 A
Rated transformation ratio $K_n$	10 / 0.0167 A
Rated burden	$\leq 180 \Omega^*$
Nominal power	0.05 VA
Frequency range	42 Hz...3 kHz
Rated continuous thermal current $I_{cth}$	40 A
Rated short-time thermal current $I_{tth}$	2.4 kA / 1 s
Rated dynamic current $I_{dyn}$	6.0 kA / 40 ms

**CT circuit W...-8000**

Rated primary residual current	1 A
Rated secondary residual current	0.125 mA
Rated transformation ratio $K_n$	1 A / 0.125 mA
Rated burden	2400 $\Omega$
Nominal power	0.0375 VA
Frequency range	42 Hz...3 kHz
Rated continuous thermal current $I_{cth}$	6 A
Rated short-time thermal current $I_{tth}$	$60 \times I_{cth} = 0.36 \text{ kA} / 1 \text{ s}$
Rated dynamic current $I_{dyn}$	$2.5 \times I_{tth} = 0.9 \text{ kA} / 40 \text{ ms}$

**Environmental conditions**

Operating temperature	-25 °C...+70 °C
Climatic class acc. to IEC 60721	
Stationary use (IEC 60721-3-3)	3K5 (except condensation and formation of ice)
Transport (IEC 60721-3-2)	2K5 (except condensation and formation of ice)
Long-time storage (IEC 60721-3-1)	1K5 (except condensation and formation of ice)
Classification of mechanical conditions IEC 60721	
Stationary use (IEC 60721-3-3)	3M4
Transport (IEC 60721-3-2)	2M2
Long-time storage (IEC 60721-3-1)	1M3

**Connection**

Type of connection	cage clamp spring terminals
rigid / flexible / conductor sizes	0.08...2.5 / 0.08...2.5 mm <sup>2</sup> / 28...12 AWG
Stripping length	8...9 mm

**Connection EDS, RCMS-measuring current transformer**

Single wire $\geq 0.75 \text{ mm}^2$	0...1 m
Single wire twisted $\geq 0.75 \text{ mm}^2$	0...10 m
Shielded cable $\geq 0.5 \text{ mm}^2$	0...40 m
Recommended cable	J-Y (ST) Y min. 2 x 0.8 (shielded, shield on one side connected to I-conductor, not connected to earth)

**Other**

Degree of protection, internal components (IEC 60529)	IP40
Degree of protection, terminals (IEC 60529)	IP20
Screw mounting	M5 with mounting brackets
Flammability class	UL94V-0
Product standards	IEC 60044-1
Operating manual W..., W...-8000	TBP409013
Approval	UL under consideration, GOST

\*The rated burden may vary depending on the respective device data sheet


**Ordering information**

Type	Inside diameter	Mounting		Art. No.
		DIN rail	Mounting brackets	
W20	20 mm	×	×	B 9808 0003
W35	35 mm	×	×	B 9808 0010
W60	60 mm	×	×	B 9808 0018
W120	120 mm	--	×	B 9808 0028
W210	210 mm	--	×	B 9808 0034
W20-8000*	20 mm	×	×	B 9808 0009
W35-8000*	35 mm	×	×	B 9808 0017
W60-8000*	60 mm	×	×	B 9808 0027

**Accessories**

Type	Width	Art. No.
Snap-on mounting for W20-W35, W20-W35-8000*	43.5 mm	B 9808 0501
Snap-on mounting for W60, W60-8000*	50 mm	B 9808 0502

**Dimension diagram**

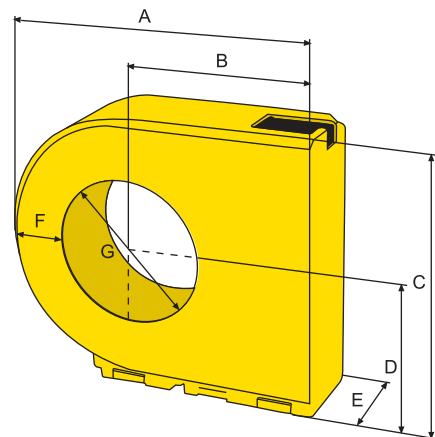

**Dimensions**


Type	A	B	C	D	E	F	G	Weight
W20	76.4	50	56.3	29.8	30	16.4	$\varnothing 20$	$\leq 0.13 \text{ kg}$
W35	99.5	62	79.2	41.7	30	20	$\varnothing 35$	$\leq 0.175 \text{ kg}$
W60	135	79	116.4	60.4	37	24	$\varnothing 60$	$\leq 0.315 \text{ kg}$
W120	210	116.5	191.5	98	37	33.5	$\varnothing 120$	$\leq 0.96 \text{ kg}$
W210	323	173	304.5	154.5	45	45	$\varnothing 210$	$\leq 2.9 \text{ kg}$
W20-8000*	76.4	50	56.3	29.8	30	16.4	$\varnothing 20$	$\leq 0.15 \text{ kg}$
W35-8000*	99.5	62	79.2	41.7	30	20	$\varnothing 35$	$\leq 0.205 \text{ kg}$
W60-8000*	135	79	116.4	60.4	37	24	$\varnothing 60$	$\leq 0.355 \text{ kg}$

Dimensions in mm


\* For EDS461 / 491 and EDS473 / 474 series insulation fault location systems

### Mounting details



Screw mounting with mounting brackets: W20, W35, W60 and W20-8000, W35-8000, W60-8000

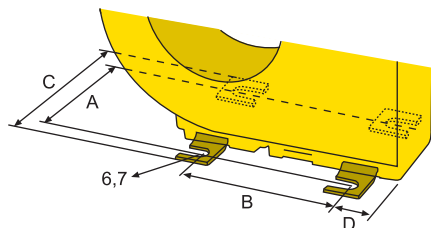

Screw mounting: W120, W210

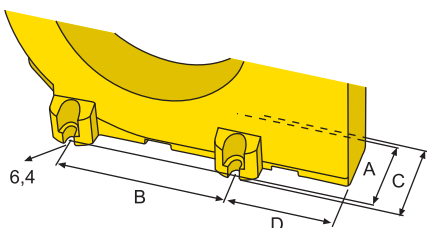

Snap-on mounting on DIN rail: for vertical or horizontal mounting: W20, W35, W60 und W20-8000, W35-8000, W60-8000

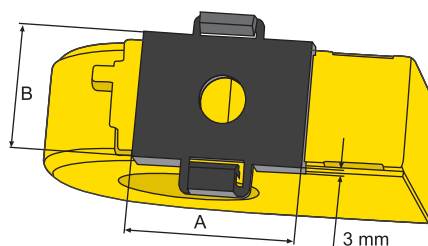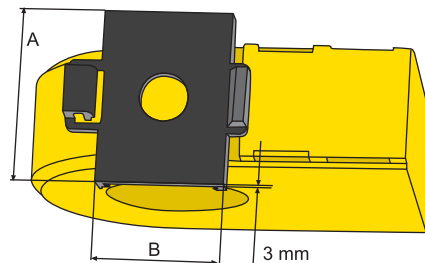

#### Dimensions screw mounting

Type	A	B	C	D
W20 / W20-8000 (fixing with two mounting brackets, diagonally)	47	31.4	63	18.6
W35 / W35-8000 (fixing with two mounting brackets, diagonally)	47	49.8	63	12.1
W60 / W60-8000 (fixing with four mounting brackets)	54	66	70	17.7
W120 screw mounting	51	103	60.6	65
W210 screw mounting	59	180	68.6	83

Dimensions in mm

#### Dimensions snap-on mounting

Type	A	B
W20 / W20-8000	43.5	32
W35 / W35-8000	43.5	32
W60 / W60-8000	50	39

Dimensions in mm

#### Dimensions screw mounting

Type	RCM420	RCM470	RCMS460 / 490	EDS460 / 490	EDS461 / 491	EDS473	EDS474
W20	×	×	×	×	--	--	--
W35	×	×	×	×	--	--	--
W60	×	×	×	×	--	--	--
W120	×	×	×	×	--	--	--
W210	×	×	×	×	--	--	--
W20-8000	--	--	--	--	×	×	×
W35-8000	--	--	--	--	×	×	×
W60-8000	--	--	--	--	×	×	×

4.5