

Dräger Polytron® 5100 EC Detection of toxic gases and vapours

The Dräger Polytron® 5100 EC is a cost-effective explosion-proof transmitter for the detection of toxic gases or oxygen. It uses a high performance plug-and-play electrochemical DrägerSensor® to detect a specific gas. A 2 or 3-wire with 4 to 20 mA output with relays make it compatible with most control systems.



Benefits

Durable, intelligent and sensitive – the DrägerSensor®

With unique electrochemical DrägerSensors, Polytron 5100 can detect over 100 toxic gases and oxygen. These long-life sensors provide continuous detection even under the harshest conditions. DrägerSensors offer the industry's widest temperature range between -40°C to +65°C (-40°F to +150°F). The built-in memory contains all the necessary calibration and configuration information. The sensors are calibrated ready for immediate operation. The sensor's intrinsically safe connection dispenses with the need for a flame arrestor giving you a faster response time and higher sensitivity.

Same design, same operating principle

Polytron 5100 belongs to the Dräger Polytron 5000 series. All transmitters in this series have the same design and user interface. This allows for uniform operation with reduced training and maintenance requirements. The backlit display shows status information clearly with quick access to functions using a non-intrusive magnetic wand. The gas concentration and measurement unit are displayed during normal operation. Coloured LEDs (green, yellow and red) provide additional alarm and status information.

Three relays for controlling external equipment

The Dräger Polytron 5100 can also be supplied with three integrated relays upon request. This enables you to use it as an independent gas detection system with two adjustable gas concentration alarms and one fault alarm. Audio alarms, signal lights or similar devices can thus be controlled locally without an additional cable between the transmitter and central controller.

Safe, robust housing for every application

The Polytron 5100 features a Class I, Div. 1 rated explosion-proof enclosure made of aluminum or stainless steel, making it suitable for a wide range of environmental conditions. A protection type "e" version includes a convenient docking station enabling installation in hazardous atmospheres without running conduit (where approved).

The remote sensor option does not require conduit

The optional remote sensor enclosure enables the sensor to be installed away from the transmitter. This makes it easy to place the sensor close to a potential gas cloud in an inaccessible location while keeping the display at eye level. Because the sensor is connected to the transmitter through an intrinsically safe port, you don't need to run conduit to mount a remote sensor. And to make things even easier, Dräger includes cabling up to 100 feet (30 meters) long. The intrinsically safe connection also allows 'hot swaps' in a hazardous atmosphere without disconnecting power or declassifying the area.

System Components



D-27777-2009

Dräger REGARD® 3900

The Dräger REGARD® 3900 is a standalone, self contained control system for the detection of Toxic, Oxygen and Ex hazards. The control system is fully configurable between 1 and 16 channels, depending upon the type and quantity of input/output boards installed.




ST-335-2004

Dräger REGARD®-1

The Dräger REGARD®-1 is a standalone, self contained single channel control system for the detection of Toxic, Oxygen and Ex hazards. The control system is fully configurable for a single input from either a 4 to 20 mA transmitter or a Dräger Polytron® SE Ex measuring head.

Accessories

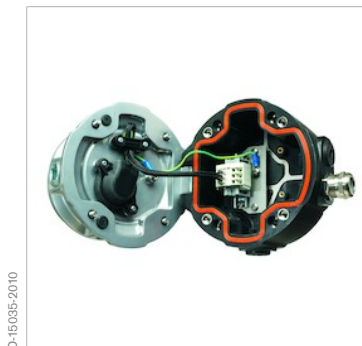

D-16035-2010

Docking station

The docking station is included with all transmitters in the Polytron® 5000 and Polytron® 8000 series for protection type “e”, increased safety. This also facilitates pre-assembly.

Accessories



D-85369-2013

Splash guard

The Splash guard protects the sensor against splash water and dirt.



D-85345-2013

Duct mount kit

The duct mount kit enables gas monitoring inside ventilation ducts while keeping the transmitter outside.

Related Products



D-52604-2012

Dräger Polytron® 8100 EC

The Polytron® 8100 EC is Dräger's top of the line explosion proof transmitter for the detection of toxic gases or oxygen. It uses a high performance plug and play electrochemical DrägerSensor® to detect a specific gas. Besides a 3 wire 4 to 20 mA analogue output with relays, it also offers Modbus and Fieldbus protocol making it compatible with most control systems.

Related Products



ST-3811-20/03

Dräger Polytron® 3000

The Dräger Polytron® 3000 is an intrinsically safe gas detector for the continuous monitoring of more than 60 toxic gases and oxygen in ambient air. It is the part of a new generation of gas detectors developed on a modular platform. Communication to the central control system is done via a 4 to 20 mA signal.

Technical Data

Dräger Polytron® 5100 EC

Type	Explosion-proof / flameproof enclosed transmitter ("d") or combined with increased safety ("d/e")			
Gases	Toxic gases and oxygen depending on the sensor used			
Measuring ranges	For customised adjustment, see sensor data sheet			
Display	Backlit (3-wire) graphic LCD; 3 Status LEDs (green/yellow/red) (3-wire)			
Electrical data	Signal output analog	Normal operation	4 to 20 mA	
		Maintenance	Constant 3.4 mA or 4 mA ±1 mA 1 Hz modulation; (adjustable)	
		Fault	< 1.2 mA, 3-wire < 3 mA, 2-wire	
	Power supply	10 to 30 V DC, 3-wire 18 to 30 V DC, 2-wire		
Power consumption (max.)	w/o relay, non-remote	80 mA at 24 V		
	w/ relay, remote	100 mA at 24 V		
Relay specification (option)	2 alarm relays and 1 fault relay, SPDT 5 A @ 230 VAC, 5 A @ 30 VDC, resistance-bound			
Environmental conditions (see sensor data sheet)	Temperature	-40 to 65°C (-40 to 149°F) without relay -40 to 65°C (-40 to 149°F) with relay		
	Pressure	20.7 to 38.4 inches Hg / 700 to 1.300 mbar		
	Humidity	0 to 100% RH, non-condensing		
Housing	Transmitter housing	Epoxy coated copper-free aluminum or stainless steel SS316 L		
	Sensor housing	Polyamide		
	Enclosure protection type	NEMA 4X & 7, IP65/66/67		
	Cable entry point	3/4" NPT thread or M20 cable gland		
	Dimensions (H x W x D), approx.	w/o docking station	11.0" x 5.9" x 5.1" / 280 x 150 x 130 mm	
		w/ docking station	11.0" x 7.1" x 7.5" / 280 x 180 x 190 mm	
	Approx. weight	Aluminium w/o docking station	3.0 kg	
		SS316 L w/o docking station	5.0 kg	
		Aluminium w/ docking station	4.5 kg	
		SS316 L w/ docking station	6.5 kg	
Approvals*	UL	Class I, Div 1, Groups A, B, C, D; Class II, Div 1, Groups E, F, G; Class I, Zone 1, Group IIC; T-Code T6/T4		
	CSA	Class I, Div 1, Groups A, B, C, D; Class II, Div 1, Groups E, F, G; Class I, Zone 1, Group IIC; T-Code T6/T4		
	IECEX	Ex db (ia) IIC T6/T4 Gb, -40 ≤ Ta ≤ +40/+70°C; "d" version Ex db e (ia) IIC T6/T4 Gb, -40 ≤ Ta ≤ +40/+70°C; "e" version Ex tb (ia) IIIC T135°C Db		
	ATEX	II 2G Ex db (ia) IIC T6/T4 Gb, -40 ≤ Ta ≤ +40/+70°C; "d" version II 2G Ex db e (ia) IIC T6/T4 Gb, -40 ≤ Ta ≤ +40/+70°C; "e" version II 2D Ex tb (ia) IIIC T135°C Db		
	CE markings	ATEX (Directive 2014/34/EU)		

Technical Data

Electromagnetic Compatibility (Directive 2014/30/EU)
Low Voltage (Directive 2014/35/EU)

* All docking station versions are only ATEX/IECEX approved

Ordering Information

Dräger Polytron® 5100 EC

Dräger Polytron® 5100 EC d A	83 44 860
Dräger Polytron® 5100 EC d A relay	83 44 121
Dräger Polytron® 5100 EC e A (incl. Docking Station)	83 44 124
Dräger Polytron® 5100 EC e A relay (incl. Docking Station)	83 44 125
Dräger Polytron® 5xx0 Kit (Custom configuration e. g. stainless steel housing)	83 44 500

Accessories

Magnetic wand		45 44 101
Pipe mount bracket		45 44 198
Duct mount kit		68 12 725
Duct mount adaptor for remote EC sensing head		83 17 617
RS stainless steel remote adaptor		83 23 404
EC Sensing Head Remote w/mount kit		68 12 684
IR Connection Kit Polytron® 5000/8000		45 44 197
PolySoft		83 23 405
PolySoft premium		83 23 411
Connection cable w/ plug for Remote EC	16 ft / 5 m	83 23 305
Sensing Head	49 ft / 15 m	83 23 315
	98 ft / 30 m	83 23 330
Splash guard		68 12 510
Gassing adaptor	PE incl. tubing	45 09 314
Calibration adaptor Viton®		68 10 536

Viton® is a registered trademark of the DuPont company.

Notes

Not all products, features, or services are for sale in all countries.
Mentioned Trademarks are only registered in certain countries and not necessarily in the country in which this material is released. Go to www.draeger.com/trademarks to find the current status.

CORPORATE HEADQUARTERS

Drägerwerk AG & Co. KGaA
Moislinger Allee 53–55
23558 Lübeck, Germany
www.draeger.com

REGION DACH

Dräger Safety AG & Co. KGaA
Revalstraße 1
23560 Lübeck, Germany
Tel +49 451 882 0
Fax +49 451 882 2080
info@draeger.com

REGION EUROPE

Dräger Safety AG & Co. KGaA
Revalstraße 1
23560 Lübeck, Germany
Tel +49 451 882 0
Fax +49 451 882 2080
info@draeger.com

REGION MIDDLE EAST, AFRICA

Dräger Safety AG & Co. KGaA
Branch Office
P.O. Box 505108
Dubai, United Arab Emirates
Tel +971 4 4294 600
Fax +971 4 4294 699
contactuae@draeger.com

REGION ASIA PACIFIC

Draeger Safety Asia Pte Ltd
25 International Business Park
#04-20/21 German Centre
Singapore 609916
Tel +65 6308 9400
Fax +65 6308 9401
asia.pacific@draeger.com

REGION CENTRAL AND SOUTH AMERICA

Dräger Panama S. de R.L.
Complejo Business Park,
V tower, 10th floor
Panama City
Tel +507 377 9100
Fax +507 377 9130
contactcsa@draeger.com

Locate your Regional Sales
Representative at:
www.draeger.com/contact

