


Data sheet: Electronics module VMPA2-FB-EMG-4 – #537984

Function

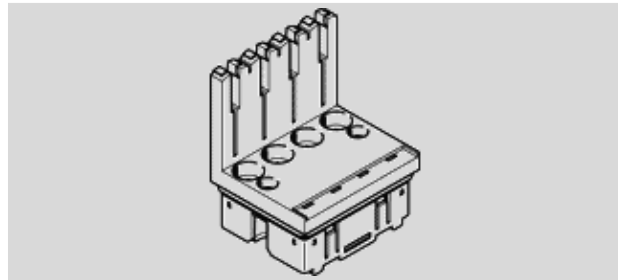

Feature	values
Diagnosis	- Undervoltage of valves
Max. number of valve positions	2
Max. number of solenoid coils	4
Intrinsic current consumption at load voltage	23 mA
Intrinsic current consumption at operating voltage	8 mA
Nominal breakaway current per solenoid coil	99 mA up to 24 ms
Nominal current with current reduction	18 mA after 24 ms
Corrosion resistance classification CRC	1 (when installed)
Materials information, housing	POM
Materials note	Conforms to RoHS