


Han 24Ex UL-F-s

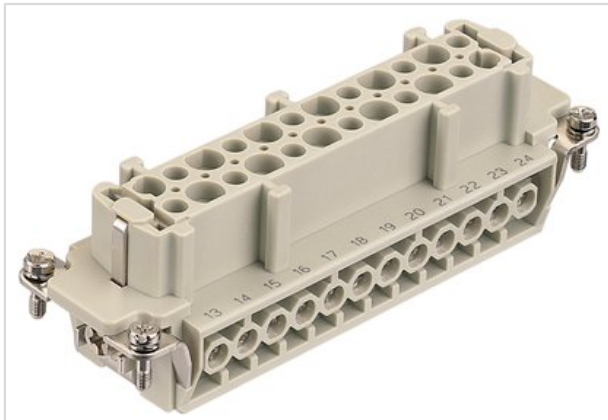

Part number	09 36 524 2701
Specification	Han 24Ex UL-F-s
HARTING eCatalogue	https://b2b.harting.com/09365242701

Identification

Category	Inserts
Series	Han [®] Ex

Version

Termination method	Screw termination
Gender	Female
Size	24 B
Number of contacts	24
PE contact	Yes
Details	for US purposes only
Details	ATTENTION! Only to be used with Han [®] Ex hoods and housings!

Technical characteristics

Conductor cross-section	0.75 ... 2.5 mm ²
Rated current	16 A
Rated voltage	90 V
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Limiting temperature	-20 ... +40 °C
Tightening torque	0.5 Nm
Mating cycles	≥500

Material properties

Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Surface (contacts)	Silver plated



Pushing Performance

Material properties

Material flammability class acc. to UL 94	V-0
---	-----

Commercial data

Packaging size	1
Net weight	123.4 g
Country of origin	Germany
European customs tariff number	85366990