


# SD5500

## Compressed air meter

SDR14DGXFRKG/US-100

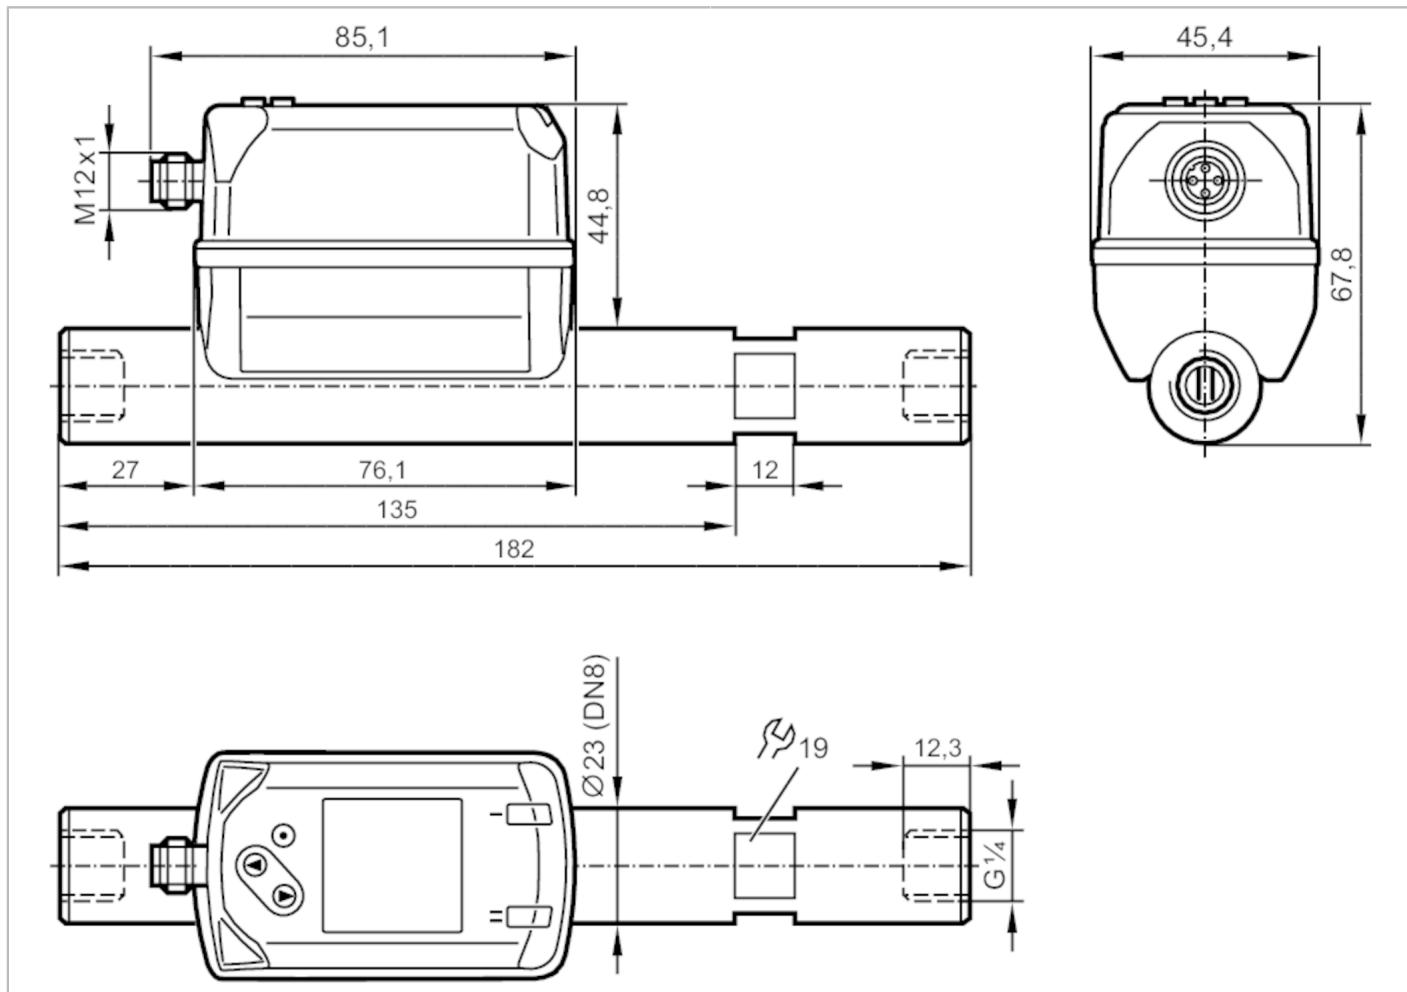

### Product characteristics

|                              |   |                |                |
|------------------------------|---|----------------|----------------|
| Number of inputs and outputs | Number of digital outputs: 2; Number of analogue outputs: 1 |                |                |
| Measuring range              | 0.8...250 l/min   | 0.3...82.9 m/s | 0.05...15 m³/h |
| Process connection           | threaded connection G 1/4 DN8                               |                |                |

### Application

|                              |                             |          |  |
|------------------------------|-----------------------------|----------|--|
| Application                  | for industrial applications |          |  |
| Media                        | compressed air              |          |  |
| Medium temperature [°C]      |                             | -10...60 |  |
| Min. bursting pressure [bar] |                             | 64       |  |
| Min. bursting pressure [MPa] |                             | 6.4      |  |
| Pressure rating [bar]        |                             | 16       |  |
| Pressure rating [Mpa]        |                             | 1.6      |  |

# SD5500



## Compressed air meter

SDR14DGXFRKG/US-100

| Electrical data                                 |                   |  |                   |
|---|-------------------|--|-------------------|
| Operating voltage                               | [V]               | 18...30 DC; (according to EN 50178 SELV/PELV)                            |                   |
| Current consumption                             | [mA]              | < 80   |                   |
| Protection class                                |                   | III  |                   |
| Reverse polarity protection                     |                   | yes  |                   |
| Power-on delay time                             | [s]               | 1  |                   |
| Inputs / outputs                                |                   |  |                   |
| Number of inputs and outputs                    |                   | Number of digital outputs: 2; Number of analogue outputs: 1              |                   |
| Inputs  |                   |  |                   |
| Inputs  |                   | counter reset  |                   |
| Outputs   |                   |  |                   |
| Output signal                                   |                   | switching signal; analogue signal; pulse signal; IO-Link; (configurable) |                   |
| Electrical design                               |                   | PNP/NPN  |                   |
| Number of digital outputs                       |                   | 2  |                   |
| Output function                                 |                   | normally open / normally closed; (parameterisable)                       |                   |
| Max. voltage drop switching output DC           | [V]               | 2.5  |                   |
| Permanent current rating of switching output DC | [mA]              | 150; (per output)  |                   |
| Number of analogue outputs                      |                   | 1  |                   |
| Analogue current output                         | [mA]              | 4...20; (scalable)   |                   |
| Max. load                                       | [Ω]               | 500  |                   |
| Pulse output                                    |                   | consumed quantity meter  |                   |
| Short-circuit protection                        |                   | yes  |                   |
| Type of short-circuit protection                |                   | pulsed   |                   |
| Overload protection                             |                   | yes  |                   |
| Measuring/setting range                         |                   |  |                   |
| Measuring range                                 | 0.8...250 l/min   | 0.3...82.9 m/s   | 0.05...15 m³/h    |
| Display range                                   | 0...300 l/min     | 0...99.5 m/s   | 0...18 m³/h       |
| Resolution                                      | 0.2 l/min         | 0.1 m/s  | 0.01 m³/h         |
| Set point SP                                    | 2.2...249.9 l/min | 0.7...82.9 m/s   | 0.13...14.99 m³/h |
| Reset point rP                                  | 0.9...248.7 l/min | 0.3...82.5 m/s   | 0.06...14.92 m³/h |
| Analogue start point ASP                        | 0...200 l/min     | 0...66.3 m/s   | 0...12 m³/h       |
| Analogue end point AEP                          | 50...250 l/min    | 16.6...82.9 m/s  | 3...15 m³/h       |
| Low flow cut-off LFC                            | 0.3...2.7 l/min   | 0.1...0.9 m/s  | 0.02...0.16 m³/h  |
| In steps of                                     | 0.1 l/min         | 0.1 m/s  | 0.01 m³/h         |

# SD5500



## Compressed air meter

SDR14DGXFRKG/US-100

| Pressure monitoring                  |                        |  |
|--------------------------------------|------------------------|--|
| Measuring range                      | [bar]                  | -1...16  |
| Display range                        | [bar]                  | -1...20  |
| Resolution                           | [bar]                  | 0.05   |
| Set point SP                         | [bar]                  | -0.92...16   |
| Reset point rP                       | [bar]                  | -1...15.92   |
| Analogue start point                 | [bar]                  | -1...12.8  |
| Analogue end point                   | [bar]                  | 2.2...16   |
| In steps of                          | [bar]                  | 0.01   |
| Volumetric flow quantity monitoring  |                        |  |
| Measuring range                      |                        | 0...100000000 m³   |
| Display range                        |                        | 0...100000000 m³   |
| Set point SP                         |                        | 0.001...10000000 m³  |
| Pulse value                          |                        | 0.001...10000000 m³  |
| In steps of                          |                        | 0.0001 m³  |
| Pulse length                         | [s]                    | 0.01...2   |
| Temperature monitoring               |                        |  |
| Measuring range                      |                        | -10...60 °C  |
| Display range                        |                        | -24...74 °C  |
| Resolution                           |                        | 0.2 °C   |
| Set point SP                         |                        | -9.7...60 °C   |
| Reset point rP                       |                        | -10...59.7 °C  |
| Analogue start point                 |                        | -10...46 °C  |
| Analogue end point                   |                        | 4...60 °C  |
| In steps of                          |                        | 0.1 °C   |
| Accuracy / deviations                |                        |  |
| Temperature coefficient              | [1/K]                  | ± 0,07 % MW  |
| Accuracy (in the measuring range)    |                        | class 141: ± (2 % MW + 0,5 % MEW); class 344: ± (6 % MW + 0,6 % MEW) ; air quality to ISO 8573-1:2010; at medium temperature 23 °C |
| Repeatability                        |                        | ± (0,4 % MW + 0,1 % MEW)   |
| Pressure monitoring                  |                        |  |
| Repeatability                        | [% of the final value] | ± 0,2  |
| Characteristics deviation            | [% of the final value] | < ± 0,5; (BFSL = Best Fit Straight Line)   |
| Greatest TEMPCO of the span          | [% MEW / 10 K]         | ± 0,15   |
| Greatest TEMPCO of the zero point    | [% MEW / 10 K]         | ± 0,25   |
| Temperature monitoring               |                        |  |
| Accuracy                             | [K]                    | ± 0,5; (medium flow in the limit area of the flow measurement range)   |
| Response times                       |                        |  |
| Response time                        | [s]                    | 0.1; (dAP = 0)   |
| Damping for the switching output dAP | [s]                    | 0...5  |

# SD5500


## Compressed air meter

SDR14DGXFRKG/US-100



|                               |  |                    |
|-------------------------------|--|--------------------|
| Pressure monitoring           |  |                    |
| Response time                 | [s]  | 0.05               |
| Temperature monitoring        |  |                    |
| Dynamic response T05 / T09    | [s]  | T09 = 0,5          |
| <b>Software / programming</b> |  |                    |
| Parameter setting options     | hysteresis / window; normally open / normally closed; current/pulse output; display can be rotated and switched off; Display unit; totaliser   |                    |
| <b>Interfaces</b>             |  |                    |
| Communication interface       | IO-Link  |                    |
| Transmission type             | COM2 (38,4 kBaud)  |                    |
| IO-Link revision              | 1.1  |                    |
| SDCI standard                 | IEC 61131-9 CDV  |                    |
| Profiles                      | Digital Measuring Sensor (0x800A), Identification and Diagnosis (0x4000)   |                    |
| SIO mode                      | yes  |                    |
| Required master port type     | A  |                    |
| Process data analogue         | 8  |                    |
| Process data binary           | 2  |                    |
| Min. process cycle time       | [ms]   | 7.2                |
| Supported DeviceIDs           | Type of operation<br>Default   | DeviceID<br>860    |
| <b>Operating conditions</b>   |  |                    |
| Ambient temperature           | [°C]   | 0...60             |
| Storage temperature           | [°C]   | -20...85           |
| Max. relative air humidity    | [%]  | 90                 |
| Protection                    | IP 65; IP 67   |                    |
| <b>Tests / approvals</b>      |  |                    |
| EMC                           | DIN EN 60947-5-9   |                    |
|                               | model number   | 001TG              |
|                               | accuracy class   | -                  |
| CPA approval                  | maximum allowable error  | ± 2,5 % FS         |
|                               | Q (min)  | 0,05 m³/h          |
|                               | Q (t)  | -                  |
|                               | Q (max)  | 15 m³/h            |
| Vibration resistance          | DIN EN 68000-2-6   | 5 g (10...2000 Hz) |
| MTTF                          | [years]  | 183                |
| UL approval                   | UL Approval no.  | I012               |
|                               | File number UL   | E174189            |
| Pressure Equipment Directive  | Sound engineering practice; can be used for stable gases fluid group 2   |                    |
| <b>Mechanical data</b>        |  |                    |
| Weight                        | [g]  | 556                |
| Materials                     | PBT+PC-GF30; PPS GF40; stainless steel (1.4301 / 304); stainless steel (1.4305 / 303); steel (1.5523) galvanised; 2.0401 (brass / CW614N); FKM |                    |
| Materials (wetted parts)      | EN AW-6082 (aluminium); stainless steel (1.4305 / 303); FKM; ceramics glass passivated; PPS GF40; Al2O3 (ceramics); acrylate                   |                    |
| Process connection            | threaded connection G 1/4 DN8  |                    |

# SD5500



## Compressed air meter


SDR14DGXFRKG/US-100

| Displays / operating elements |   |
|-------------------------------|---|
| Display                       | colour display 1,44", 128 x 128 pixels<br>2 x LED, yellow   |
| Remarks                       |   |
| Remarks                       | MW = measured value<br>MEW = Final value of the measuring range<br>Measuring, display and setting ranges refer to the standard volume flow according to DIN ISO 2533.<br>For information about installation and operation please see the operating instructions.  |
| Pack quantity                 | 1 pcs.  |
| Electrical connection         |   |
| Connector: 1 x M12            |  The diagram shows a circular M12 connector with four pins. Pin 1 is at the top, Pin 2 is at the top-left, Pin 3 is at the bottom-left, and Pin 4 is at the bottom. Pin 2 has a square symbol next to it, indicating it is the ground pin. |

## Compressed air meter

SDR14DGXFRKG/US-100

### Connection

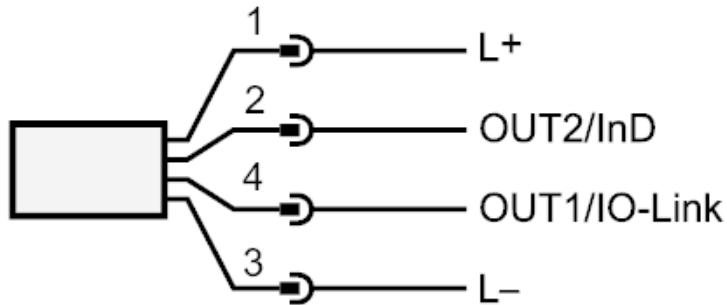

- OUT1/IO-Link:
- switching output flow
  - switching output temperature
  - switching output pressure
  - Pulse output quantity meter
  - signal output Preset counter
- OUT2/InD:
- switching output flow
  - switching output temperature
  - switching output pressure
  - analogue output flow
  - analogue output temperature
  - analogue output pressure
  - signal output Preset counter
  - Pulse output quantity meter
  - input counter reset