



T70 1

The classic for lifting applications

Characteristics

- High-sensitivity two-step push button.
- Multiband Radio with Full-Duplex communication
- Highly customizable
- LCD display
- External removable EEPROM SIM module
- Easy and fast maintenance
- High resistance to impacts
- Frequency management against interferences

Specifications

Transmitter	T70 1
Stop Function	Cat. 3 - PLd
Ingress Protection	IP65/NEMA4
Anti condensation system	na
Frequency Band	Multiband (400 - 930 MHz)
Main Mechanisms (Max. #)	Pushbutton (6)
Auxiliary Mechanisms	Toggle & Rotary switches
Removable EEPROM	External
Battery Model	BT06K
Battery Life	10h
Operating Temperature Range	-20C +70C (-4F +158F)
Weight (with Battery) Grams	460
Harness	Hand Strap / Shoulder Strap
Display	2x12 Char LCD
Cable Connection	na
Range Limiter	YES
Associated Receivers	R06/R13/R70/RCAN/MP08

Associated Applications



HEADQUARTERS
 IKUSI - Ángel Iglesias S.A. - Pº Miramón, 170 - 20014 San Sebastián - SPAIN
 Tel.: +34 943 44 88 00 · Fax: +34 943 44 88 20 · tic@kusi.com · www.ikusitlc.com

IKUSI WORLDWIDE
 AUSTRALIA/NEW ZEALAND · BRAZIL · CHILE · COLOMBIA · FRANCE · GERMANY · INDIA · MEXICO · SPAIN · UNITED ARAB EMIRATES





R70

Flexibility for any application

Characteristics

- Multiband Radio with Full-Duplex communication
- Highly field-customizable
- External EEPROM SIM module
- Frequencies management against interferences
- STOP: PLd, Category 3 according to EN ISO 13849-1:2008
- Easy and fast maintenance
- Multi-feedback capability
- 29 digital and 8 analogue outputs
- Suitable for all common proportional valves

Specifications

Receiver	R70
Stop Function	Cat. 3 - PLd
Ingress protection	IP65/NEMA4
Frequency Band	Multiband (400 - 930 MHz)
AC Power Supply	48/115/230 Vac
DC Power Supply	9 -35 Vdc
Antenna	Internal / External
Removable EEPROM	Internal
Signalling	Internal
ON/OFF outputs (Max.)	29
Analogue Outputs (Max.)	8
CANOpen, Profibus-DP, SAE J1939	YES
ON/OFF inputs (Max.)	44
Analogue Inputs (Max.)	8
Maximum output Current	8A
Working Temperature Range	-20C +70C (-4F +158F)
Weight (gr)	Config dependable
Dimensions (LxWxH mm)	285x200x110
Cable connection	YES
Associated Transmitters	T70/1, T70/2, T70/1 HALL, T70/2 HALL, T70/1 ATEX, T70/2 ATEX, IK2, IK3, IK4







HEADQUARTERS

IKUSI - Ángel Iglesias S.A. · Pº Miramón, 170 · 20014 San Sebastián · SPAIN
Tel.: +34 943 44 88 00 · Fax: +34 943 44 88 20 · tic@ikusi.com · www.ikusitlc.com

IKUSI WORLDWIDE

AUSTRALIA/NEW ZEALAND · BRAZIL · CHILE · COLOMBIA · FRANCE · GERMANY · INDIA · MEXICO · SPAIN · UNITED ARAB EMIRATES



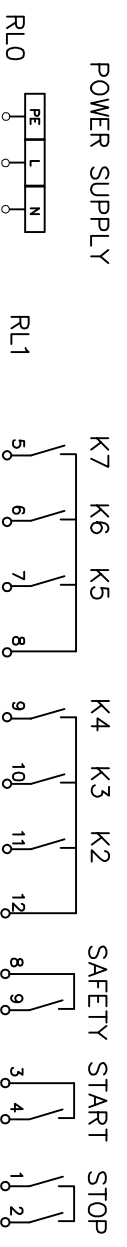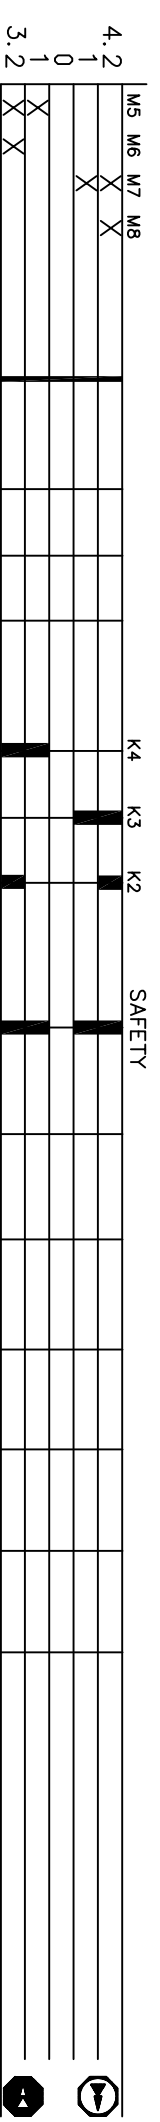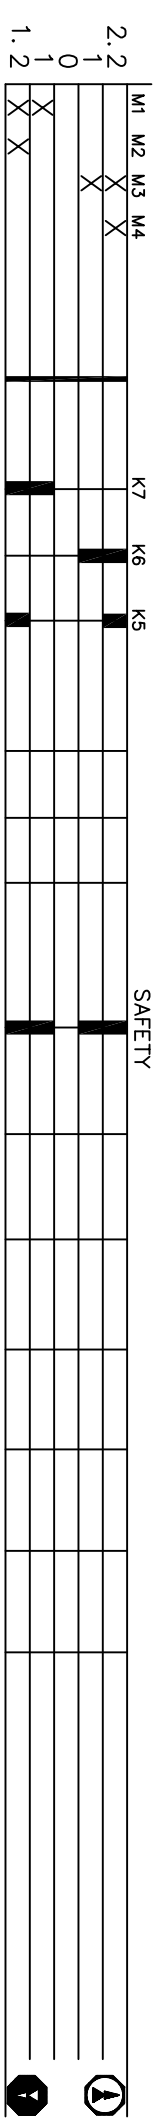

06710060

gezi		Datum	Name	Modifikationen		Projekt	Rx-Platine	Blatt
geki		29.04.2015	Bloemhofen				LR70MR06	002