



# 3-dimensional modular system BASIC

Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core  
 Textured surface in grey RAL 7032  
 Protection class IP65: single door  
 Protection class IP54: double door

Vertical c-rails provided on the rear wall  
 Door locking: Double-bit lock insert in stainless steel for cabinet series 100 with single doors; otherwise with additional three-point locking device and polyamide handle.

## Arrangement


Floor  
 Sandwich-floor with PU-foam core 25 mm (standard)  
 Upon special request: GRP 5 mm  
 GRP 5 mm with opening size (floor version C BASIC)

## Options

**MP** mounting plate  
 **FA/FS**  acrylic glass/  safety glass window

- SG** Burglary-resistant swing handle with profile cylinder to DIN 18252 (lockable) series 100, single door:  
 with /  without 3-point locking device
- C-VA** Vertical c-rails in stainless steel instead of anodized aluminium
- GO** Antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening (see data sheet Sd526-xe „Fastenings for BASIC floor versions“)
- WA** Wall fastening  inside/  outside
- SZ** Ground vault for installation in the ground

**All combinations are possible !**

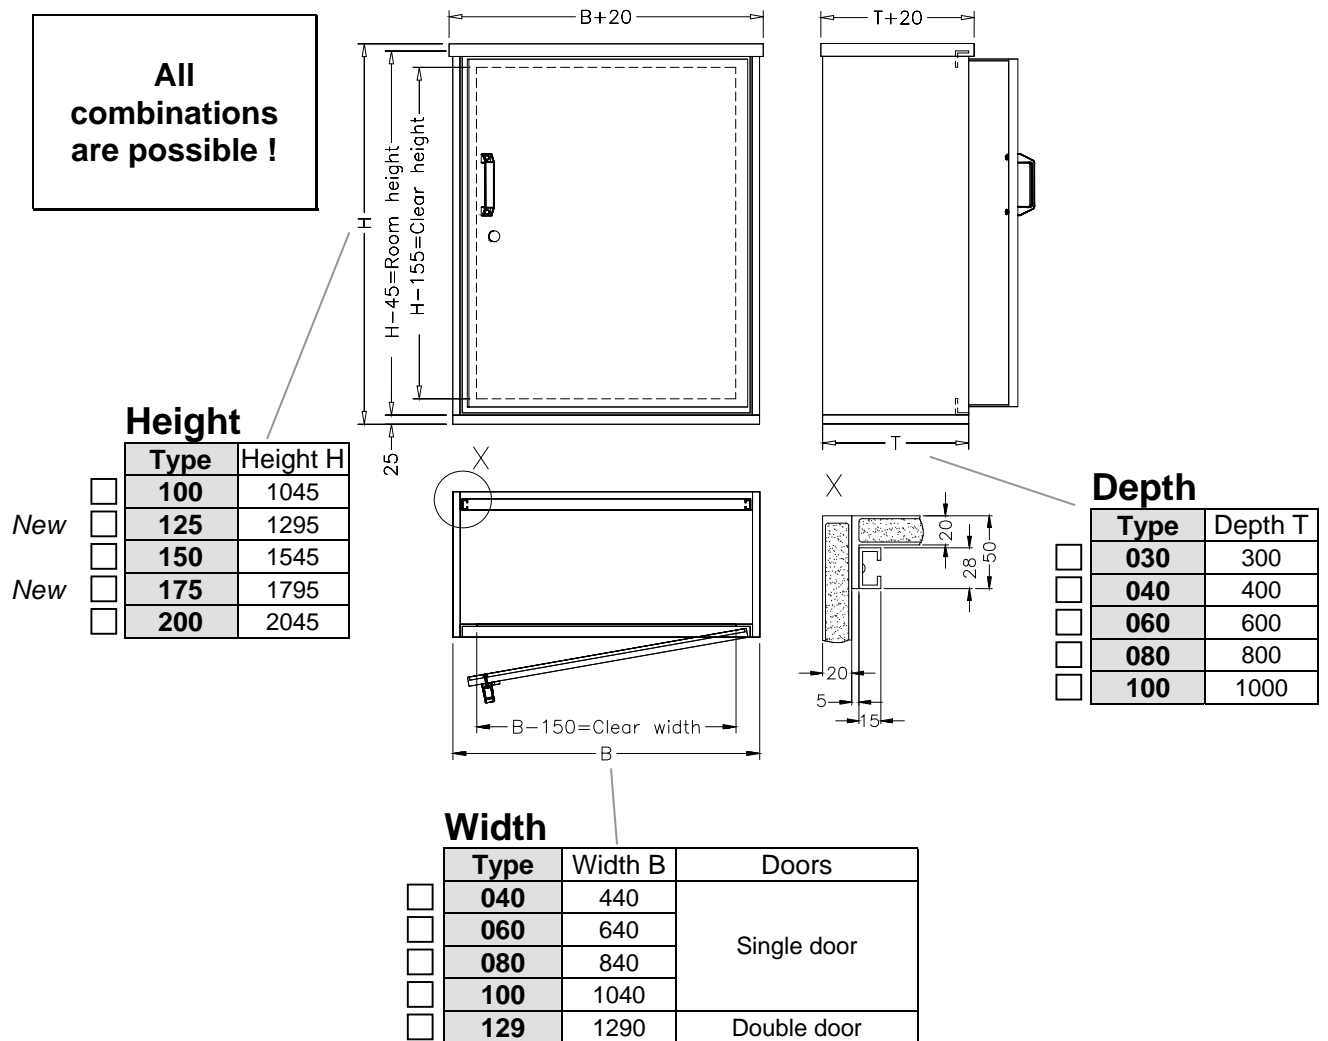

The cabinet designation is composed of the individual types, e.g.

**100.080.060**

Height. Width. Depth