


DIN 6796, Conical spring washer, 8 mm, SpSt, mechanical galvanized, Typ 1, 12 µm, Zn12M Typ1

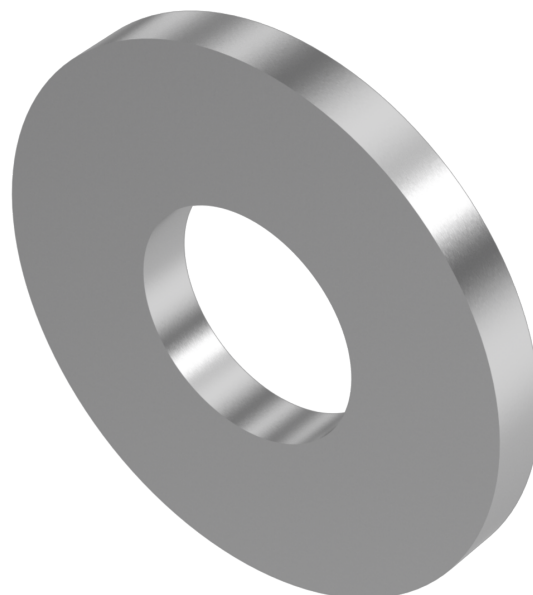

Article number
2067968

Weight in kg
0.003

Customs number
73182100

Material
Spring steel

Quality
SpSt

Coating
mechanical galvanized, Typ 1, 12 µm, Zn12M Typ1

Nominal size
8 mm



Product details

Conical spring washers for bolted connections.

Material	Spring steel
Geeignet für Schraubendurchmesser	8 mm
Diameter d1	8.4 mm
Diameter d2	18 mm
Norm	DIN 6796
Quality	SpSt
Coating	mechanical galvanized, Typ 1, 12 µm, Zn12M Typ1
Thickness s	2 mm
Nominal size	8 mm

Remarks

Attention: Possibility of hydrogen embrittlement acc. ISO 4042. For further questions, please contact us under: engineering@keller-kalmbach.com

Product variants

Coating	Detatone 9000, 240h	Geomet 321 A+VL	Geomet 500 B	HDG	Zinc-iron, black, 8 µm, ZnFe 8/Fn/ T2 µ0,12 - 0,18	Zn12 M Typ 2-C	Zn15 M TYP 2-Cn	mechanical galvanized, Typ 1, 12 µm, Zn12M Typ1	mechanical galvanized, Typ 1, 65 µm, Zn65M Typ1	pln	zinc flake, 480h, f lZn/n c/TL µ0,09 - 0,14	zinc flake, 720h, f lZn/n c	zinc flake, 720h, f lZn/n c/TL µ0,09 - 0,14	zinc-plated, thick layer, 5 µm, Zn5/Cn/T2 µ0,12 - 0,18
Nominal size (mm)														
2,5								•						
3								•		•		•		
4								•		•				
5								•		•	•			•
6							•	•		•				
8				•	•		•	•		•				
10				•		•	•	•		•				
12	•	•		•			•	•	•	•	•			
14								•		•		•		
16				•	•		•	•		•				
18								•		•				
20		•	•				•	•		•				
22										•				
24								•		•			•	
30								•		•				