


U.I. Lapp GmbH	PRODUCT INFORMATION	
	H05V-K	12.09.2012

Time-saving assembly



Application range

Internal wiring of devices
Protected installation in and on lighting equipments
Signal systems in and on plaster in tubes

Design

Fine-wire strand made of bare copper wires
Core insulation: Based on PVC

Product features

Flame-retardant according to IEC 60332-1-2
Spool: d1 = 18 mm; d2 = 200 mm; b = 85 mm

Remark

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.

Copper price basis: EUR 150/100kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges.

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Approvals:	HD 21/VDE 0281
Specific insulation resistance:	> 20 GOhm x cm
Conductor stranding:	Fine wire according to VDE 0295 Class 5/ IEC 60228 Class 5
Minimum bending radius:	At a cable temperature of 20°C ±10°C, according to HD 516 4 x outer diameter (OD) for normal use 2 x OD for cautions bending
Nominal voltage:	U ₀ /U: 300/500 V
Test voltage:	2000 V
Current rating:	VDE 0298 Part 4 HD 516/VDE 0298-300
Temperature range:	Fixed installation: -30°C to +80°C

Product Management	Document: LAPP_PRO168EN.pdf	1 / 5
--------------------	-----------------------------	-------

H05V-K

12.09.2012

Part number	Conductor cross-section (mm ²)	Outer diameter (mm)	Core colour	m/ring	m/spool	Copper index (kg/km)	Weight (kg/km)
4510001	0,5	2.5	Green/yellow	100		4.8	9
4510011	0,5	2.5	black	100		4.8	9
4510021	0,5	2.5	blue	100		4.8	9
4510141	0,5	2.5	Dark blue	100		4.8	9
4510031	0,5	2.5	brown	100		4.8	9
4510111	0,5	2.5	yellow	100		4.8	9
4510121	0,5	2.5	green	100		4.8	9
4510071	0,5	2.5	violet	100		4.8	9
4510081	0,5	2.5	Pink	100		4.8	9
4510091	0,5	2.5	orange	100		4.8	9
4510041	0,5	2.5	red	100		4.8	9
4510051	0,5	2.5	white	100		4.8	9
4510061	0,5	2.5	grey	100		4.8	9
4510161	0,5	2.5	ultra-marine blue	100		4.8	9
4510921	0,5	2.5	Dark blue/white	100		4.8	9
4510002	0,75	2.7	Green/yellow	100		7.2	12
4510012	0,75	2.7	black	100		7.2	12
4510022	0,75	2.7	blue	100		7.2	12
4510142	0,75	2.7	Dark blue	100		7.2	12
4510032	0,75	2.7	brown	100		7.2	12
4510112	0,75	2.7	yellow	100		7.2	12
4510122	0,75	2.7	green	100		7.2	12
4510072	0,75	2.7	violet	100		7.2	12
4510082	0,75	2.7	Pink	100		7.2	12
4510092	0,75	2.7	orange	100		7.2	12
4510042	0,75	2.7	red	100		7.2	12
4510052	0,75	2.7	white	100		7.2	12
4510062	0,75	2.7	grey	100		7.2	12
4510922	0,75	2.7	Dark blue/white	100		7.2	12
4510003	1	2.8	Green/yellow	100		9.6	15
4510013	1	2.8	black	100		9.6	15
4510023	1	2.8	blue	100		9.6	15
4510143	1	2.8	Dark blue	100		9.6	15
4510033	1	2.8	brown	100		9.6	15

H05V-K


12.09.2012



Part number	Conductor cross-section (mm ²)	Outer diameter (mm)	Core colour	m/ring	m/spool	Copper index (kg/km)	Weight (kg/km)
4510113	1	2.8	yellow	100		9.6	15
4510123	1	2.8	green	100		9.6	15
4510073	1	2.8	violet	100		9.6	15
4510083	1	2.8	Pink	100		9.6	15
4510093	1	2.8	orange	100		9.6	15
4510043	1	2.8	red	100		9.6	15
4510053	1	2.8	white	100		9.6	15
4510063	1	2.8	grey	100		9.6	15
4510163	1	2.8	ultra-marine blue	100		9.6	15
4510923	1	2.8	Dark blue/white	100		9.6	15
4510001S	0,5	2.5	Green/yellow		250	4.8	9
4510011S	0,5	2.5	black		250	4.8	9
4510021S	0,5	2.5	blue		250	4.8	9
4510141S	0,5	2.5	Dark blue		250	4.8	9
4510031S	0,5	2.5	brown		250	4.8	9
4510111S	0,5	2.5	yellow		250	4.8	9
4510121S	0,5	2.5	green		250	4.8	9
4510071S	0,5	2.5	violet		250	4.8	9
4510081S	0,5	2.5	Pink		250	4.8	9
4510091S	0,5	2.5	orange		250	4.8	9
4510101S	0,5	2.5	Transparent		250	4.8	9
4510041S	0,5	2.5	red		250	4.8	9
4510051S	0,5	2.5	white		250	4.8	9
4510061S	0,5	2.5	grey		250	4.8	9
4510161S	0,5	2.5	ultra-marine blue		250	4.8	9
4510002S	0,75	2.7	Green/yellow		250	7.2	12
4510012S	0,75	2.7	black		250	7.2	12
4510022S	0,75	2.7	blue		250	7.2	12
4510142S	0,75	2.7	Dark blue		250	7.2	12
4510032S	0,75	2.7	brown		250	7.2	12
4510112S	0,75	2.7	yellow		250	7.2	12
4510122S	0,75	2.7	green		250	7.2	12
4510072S	0,75	2.7	violet		250	7.2	12
4510082S	0,75	2.7	Pink		250	7.2	12

H05V-K

12.09.2012

Part number	Conductor cross-section (mm²)	Outer diameter (mm)	Core colour	m/ring	m/spool	Copper index (kg/km)	Weight (kg/km)
4510092S	0,75	2.7	orange		250	7.2	12
4510102S	0,75	2.7	Transparent		250	7.2	12
4510042S	0,75	2.7	red		250	7.2	12
4510052S	0,75	2.7	white		250	7.2	12
4510062S	0,75	2.7	grey		250	7.2	12
4510162S	0,75	2.7	ultra-marine blue		250	7.2	12
4510003S	1	2.8	Green/yellow		250	9.6	15
4510013S	1	2.8	black		250	9.6	15
4510023S	1	2.8	blue		250	9.6	15
4510143S	1	2.8	Dark blue		250	9.6	15
4510033S	1	2.8	brown		250	9.6	15
4510113S	1	2.8	yellow		250	9.6	15
4510123S	1	2.8	green		250	9.6	15
4510073S	1	2.8	violet		250	9.6	15
4510083S	1	2.8	Pink		250	9.6	15
4510103S	1	2.8	Transparent		250	9.6	15
4510043S	1	2.8	red		250	9.6	15
4510053S	1	2.8	white		250	9.6	15
4510063S	1	2.8	grey		250	9.6	15
4510163S	1	2.8	ultra-marine blue		250	9.6	15

U.I. Lapp GmbH	PRODUCT INFORMATION	 LAPP GROUP
	H05V-K	12.09.2012

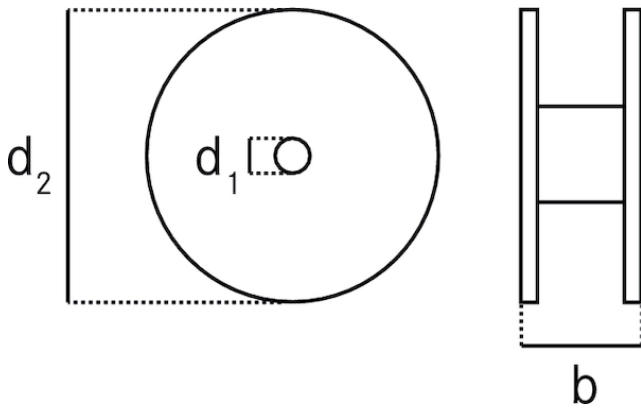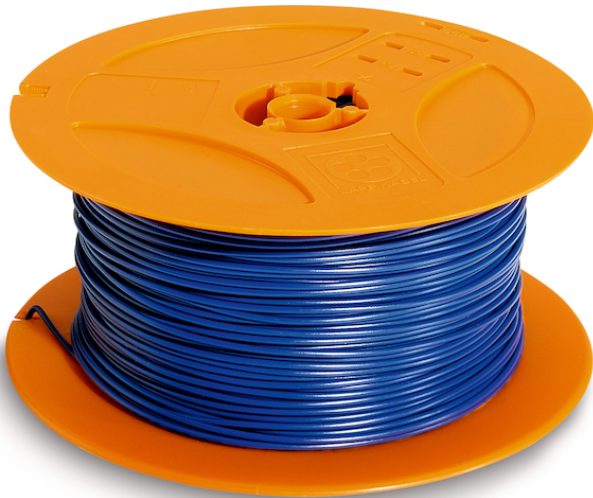

Product Management	Document: LAPP_PRO168EN.pdf	5 / 5
--------------------	-----------------------------	-------