

U.I. Lapp GmbH	PRODUCT INFORMATION	
	SKINDICHT® SVFK-M	12.09.2012

Economical type
Lateral sealing lips fit automatically around various cable dimensions
Cable-specific seal dimensions are no longer necessary
Tolerance
Large opening allows clamping of up to two flat cables



Application range

For inserting flat cables.
Conveyor systems
Pumps
Lifts
Control cabinet manufacturing

Design

Metric connection thread acc. to EN 50262

Note

Counter nut to be used: SKINTOP® GMP-GL-M
For suitable flat cables, refer to ÖLFLEX® LIFT F for indoor applications or ÖLFLEX® CRANE F for outdoor applications

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data


Caution:	The installation dimensions can be found in appendix T21
Material:	Body: Polyamide Special sealing insert: CR
Temperature range:	-30 °C to +80 °C




Product Management	Document: LAPP_PRO141167EN.pdf	1 / 3
--------------------	--------------------------------	-------



Part number	Article designation / size	Min./max. flat cable width	Min./max. cable thickness (mm)	SW1/SW2 mm	Overall length/ C (mm)	Thread length/ D (mm)	Pieces / PU
SKINDICHT® SVFK-M							
52107900	SVFK-M 25 x 1,5	- / 15	- - 5	27 / 23	41.0	11.0	25
52107901	SVFK-M 32 x 1,5	10 / 21	3 - 8	36 / 30	39.0	10.0	25
52107902	SVFK-M 40 x 1,5	16 / 28	4 - 11,5	42 / 40	44.0	11.0	25
52107903	SVFK-M 50 x 1,5	26 / 35	4 - 11,5	53 / 50	50,5	11.0	5
52107904	SVFK-M 50 x 1,5	30 / 40	5 - 15	60 / 55	53,5	11.0	5
52107905	SVFK-M 63 x 1,5	36 / 45	5 - 15	65 / 60	54,5	11.0	5

U.I. Lapp GmbH	PRODUCT INFORMATION	
	SKINDICHT® SVFK-M	12.09.2012

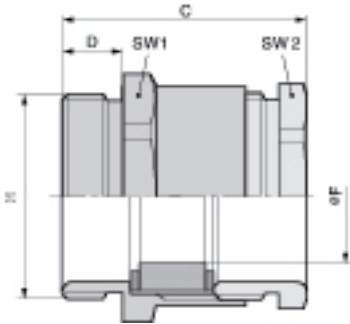

Product Management	Document: LAPP_PRO141167EN.pdf	3 / 3
--------------------	--------------------------------	-------