


TYPICAL CONFIGURATION

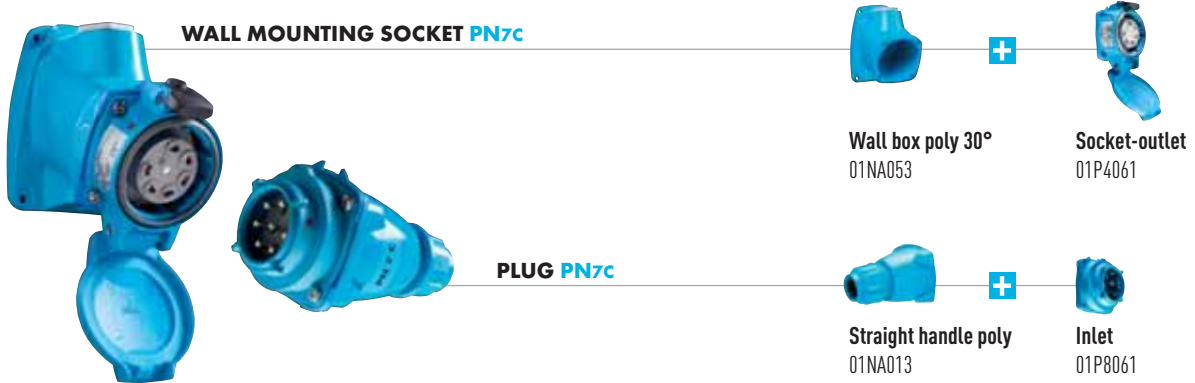

MAIN FEATURES

Rated current/contact (wiring according to standard)	25 A	Shock resistance (metal casing)	IK09
Σ of currents (contacts)	≤ 130 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	500 V	Flexible wiring (min-max)	1 - 4 mm ²
IP protection lid closed	IP66/IP67	Stranded wiring (min-max)	1 - 6 mm ²
IP protection connected plug	IP66/IP67	Wiring (terminals)	screw-type
Shock resistance (poly casing)	IK08	Keying positions	5

**SOCKET-
OUTLET** female
PN7c (16/25 A)
GRP



INLET male
PN7c (16/25 A)
GRP



U _{max}	Polarity	Part no.	Part no.
50 V	5P (25 A)	01P4050	01P8050
50 V	6P (16 A)	01P4060	01P8060
50 V	7P (16 A)	01P4070	01P8070
500 V	4P+E (25 A)	01P4041	01P8041
500 V	5P+E (25 A)	01P4051	01P8051
500 V	6P+E (16 A)	01P4061	01P8061

Note: When using two different voltages on the same site, thank you for contacting us.

**SOCKET-
OUTLET** female
PN7c (16/25 A)
METAL



INLET male
PN7c (16/25 A)
METAL



U _{max}	Polarity	Part no.	Part no.
50 V	5P (25 A)	09P4050	09P8050
50 V	6P (16 A)	09P4060	09P8060
50 V	7P (16 A)	09P4070	09P8070
415 V	4P+E (25 A)	09P4041	09P8041
415 V	5P+E (25 A)	09P4051	09P8051
415 V	6P+E (16 A)	09P4061	09P8061

BOXES

Cable gland not included



Wall box poly 30°



Wall box poly straight



Wall box metal straight



Wall box metal + inclined metal 45°



Wall box poly + inclined poly 70°

Entry	01NA053	01NA055	09NA055	09NA653	09NA653418	09NA653419	Not drilled and without cable gland Part no. 51AA058
M20	01NA053	01NA055	09NA055	09NA653	09NA653418	09NA653419	Not drilled and without cable gland
M25					09NA653418		Part no. 51AA058
M32					09NA653419		Part no. 51AA058

SLEEVES



Inclined poly 30°

611A057



Inclined metal 30°

09NA027



Inclined poly 70°

51AA757

HANDLES



Straight poly



Angled poly



Straight poly with poly cable gland



Straight metal with metal cable gland



Straight poly without cable gland with metric threaded entry

9-18 mm	01NA013	01NA313	5-12 mm	01NA753	7-13 mm	09NA963	M20	01NA253417
5-21 mm	611A413		8-18 mm	01NA25325P	8-16 mm	09NA95325M	M25	01NA253418
			14-25 mm	01NA25332P	16-24 mm	09NA95332M	M32	01NA253419



ACCESSORIES & OPTIONS

Locking with padlock (ø 4 mm) without shaft (padlocks not supplied)

Socket no. + 843



Screw locking imprint BTR 2,5

Socket no. + 22



Reversed interior and contacts (inlet cap is included)

Inlet no. + 001

Socket no. + 001



IP55 self-closing lid (Socket-outlet)

Replace P by S

Eg: 400 V 3P+N+E poly = 01S4017



Inlet cap

01NA126



Self-returning lid

Socket no. + R

180° opening lid

Socket no. + 10

180° opening and self-returning lid

Socket no. + 18