

## Data sheet REGplus IP20 E-DAT modul


Page 1/7

P/N  
1309107003-E  
EAN 4250184136569  
2021/04/27  
Version: AK

### Illustrations



Dimensional drawing

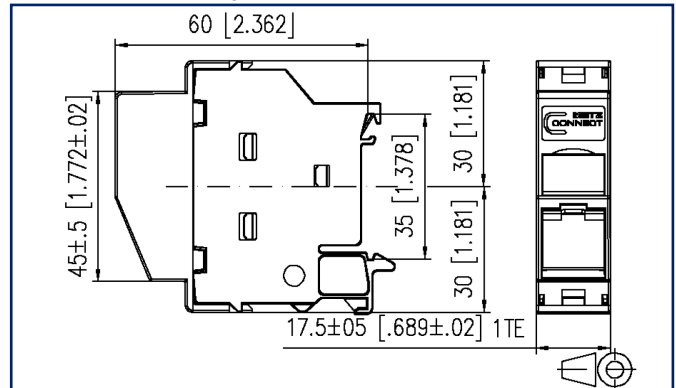

See enlarged drawings at the end of document

### Product specification

- termination unit for mounting on TH35 rails to DIN EN 60715 in electrical distribution panels for home and industrial installations
- equipped with individual E-DAT modul RJ45 module
- cable feed 45° from the top, plug direction 45° downwards
- component testing for Cat.6<sub>A</sub> to ISO/IEC 11801 Ed.2.2:2011-06, DIN EN 50173-1:2011-09, TIA/EIA-568-C.2 (2009-08) and IEC 60603-7-51 Ed.1 (12/2008), certified to GHMT
- compliance with class E to ISO/IEC 11801 Ed.2.2:2011-06, DIN EN 50173-1:2011-09
- tested: Link up to 500 MHz
- suitable for 10 GBit Ethernet (IEEE 802.3an), Remote Powering (PoE, PoE plus, UPoE and 4PPoE) and HDBaseT
- easy to install connection of 2 to 4 pair data lines AWG 26/1 - 22/1 and stranded wires with 7 copper conductors AWG 26/7 - 22/7 to BTR 8-fold insulation displacement connectors (IDC)
- marking of conductor assignment to T568A or T568B
- easy and fast insertion of wire pairs in E-DAT modul stuffer cap
- width of 1HP allows mounting up to 12 REG plus in standard electrical distribution panels
- when mounted as a device of protection class I, the equipotential bonding is realized directly over the top hat rail by means of an integrated equipotential plate. This has to be connected to the equipotential bonding of the building by means of a bonding terminal
- a cover protects the module against direct contact. If mounted in distributor panels with protective insulation, protection class II is guaranteed. In this case, it is necessary to remove the equipotential bonding spring.
- integrated dust protection cover (also colored)



# P | Cabling

Data sheet

Page 2/7

## REGplus IP20 E-DAT modul

P/N

1309107003-E

EAN 4250184136569

2021/04/27

Version: AK

### Technical Data

#### General Data

Fields of application	Office
Design	wall outlet
Mounting style	Standard rail TH35
Shielding	shielded
Transmission technology	Copper
Color	light gray
Dimensions	
Dimension (L x W x H)	60 mm x 17.5 mm x 60 mm
Dimension (L x W x H)	2.362 in. x 0.689 in. x 2.362 in.
Horizontal pitch	1HP
Labeling option	label window with identification label
Marking option	by dust protection

#### Transmission characteristics

Category (ISO)	6 <sub>A</sub>
Class (ISO/IEC)	E <sub>A</sub>
Category (TIA)	6A
Remote Powering	yes
PoE	IEEE 802.3af
PoE plus	IEEE 802.3at
UPoE	yes
4PPoE	IEEE 802.3bt
HDBaseT	yes
Transmission rate up to 10 GBit	IEEE 802.3an

#### Connections/interfaces

Connector technology interface 1	IDC-connection
Connector technology interface 2	RJ45-jack
Number of ports interface 2	1
Number of ports interface 2 equipped	1
Number of positions/contacts interface 1	8
Number of positions/contacts interface 2	8P/8C



# P | Cabling

Data sheet

Page 3/7

## REGplus IP20 E-DAT modul

P/N

1309107003-E

EAN 4250184136569

2021/04/27

Version: AK

### Technical Data

#### Connections/interfaces

Termination data, solid wire (min. - max.)

Conductor cross section, solid wire AWG 26/1 - AWG 22/1

Conductor cross section, solid wire 0.128 mm<sup>2</sup> - 0.324 mm<sup>2</sup>

Conductor diameter, solid wire (bare copper) 0.409 mm - 0.643 mm

Conductor diameter, solid wire (bare copper) 0.016 in. - 0.025 in.

Termination data, stranded wire (min. - max.)

Conductor cross section, stranded wire AWG 26/7 - AWG 22/7

Conductor cross section, stranded wire 0.141 mm<sup>2</sup> - 0.355 mm<sup>2</sup>

Conductor diameter, stranded wire (bare copper) 0.483 mm - 0.762 mm

Conductor diameter, stranded wire (bare copper) 0.019 in. - 0.03 in.

Cable sheath diameter (min. - max.)

Cable sheath diameter mm 5.5 mm - 10.00

Cable sheath diameter inch 0.197 in. - 0.394

Module plug-in direction 45° downwards

Cable access/outlet 45° from the top

#### Elektrische/ Optische Eigenschaften

Current carrying capacity max. 1 A

Contact resistance max. 20 mOhm

Insulation resistance min. 500 MOhm

Dielectric strength conductor-conductor (secondary) min. 1000 V DC

#### Mechanical data

Insertion and withdrawal force max. 30 N

Position/mounting of latch - standard installation position top

#### Materials and material properties

Material - Housing GD-Zn (zinc die-cast)

Material - Cover part(s) PA66

Material - Lower housing PA66

Material - Label window ABS, transparent

Material - Dust protection ABS

Material - Contact CuSn (tin bronze)

Material - Contact finish Ni + Au (nickel-gold)

Material - Contact carriers PA 6.6

Material - Finish Ni (nickel)

Material - Ground connection CuSn4

# P | Cabling

Data sheet

Page 4/7

## REGplus IP20 E-DAT modul

P/N

1309107003-E

EAN 4250184136569

2021/04/27

Version: AK

### Technical Data

#### Materials and material properties

RoHS	compliant
REACH - substance (SVHC)	none

#### Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 °C - 70 °C
Temperature - Storage °F	-40 °F - 158 °F
Temperature - Operating °C	-40 °C - 70 °C
Temperature - Operating °F	-40 °F - 158 °F
Particulate ingress	IP2X
Liquid ingress/immersion	IPX0
Rapid change of temperature	-40°C / -40°F - +70°C / 158°F / 25 cycles t=30 min
Electromagnetic measurement	E2

#### Certifications

GHMT Type Approval	Component
--------------------	-----------

#### The product meets the following standards

Generic cabling systems	
General requirements	ANSI/TIA-568
Connectors for electronic equipment	
Free and fixed connectors	DIN EN 60603-7-51:2011-01
Connectors for electronic equipment - Tests and measurements	
Test schedule for connectors	DIN-EN 60512-99-001, Pg. UEL1
Interference proof	
Immunity for industrial environments	DIN EN 61000-6-2:2006-03
Climate tests	IEC 60512-11

#### Classifications

ETIM 5.0	EC001024
ETIM 6.0	EC001024
ETIM 7.0	EC001024



# P | Cabling

Data sheet

Page 5/7

## REGplus IP20 E-DAT modul

P/N

1309107003-E

EAN 4250184136569

2021/04/27

Version: AK

### Technical Data

#### Packing details

Type of packaging	10 pc(s) / box
Packaging unit - Weight (gram)	697 g
Packaging unit - Weight (pound)	1.54 lb
Packaging dimension	235 mm x 165 mm x 135 mm
Packaging dimension	9.252 in. x 6.496 in. x 5.315 in.



# P | Cabling

Data sheet

Page 6/7

## REGplus IP20 E-DAT modul

P/N

1309107003-E

EAN 4250184136569

2021/04/27

Version: AK

### Accessories

P/N	Designation
816979-0103-I	Dust protection covers for Modul patch panels subway / REG gray
816979-0105-I	Dust protection covers for Modul patch panels subway / REG yellow
816979-0106-I	Dust protection covers for Modul patch panels subway / REG blue
816979-0107-I	Dust protection covers for Modul patch panels subway / REG green
816979-0108-I	Dust protection covers for Modul patch panels subway / REG red
899011-01	Label sheet for Modul patch panels / REG



# P | Cabling

Data sheet

**REGplus IP20 E-DAT modul**

Page 7/7

P/N

1309107003-E

EAN 4250184136569

2021/04/27

Version: AK

## Illustrations

Dimensional drawing

