



**Three-phase busbar link, Protected against accidental contact, short-circuit proof,  $U_e = 690\text{ V}$ ,  $I_u = 63\text{ A}$ , Circuit-breaker: 2, Unit width 45 mm, Type of electric connection: Fork**

**Part no.** B3.0/2-PKZ0  
**Catalog No.** 063961  
**Alternate Catalog No.** XTPAXCLKA2  
**EL-Nummer (Norway)** 4357208

## Delivery program

|                 |  |        |   |
|-----------------|--|--------|---|
| Product range   |  |        | Accessories   |
| Accessories     |  |        | Three-phase busbar link   |
|                 |  |        | For parallel power feed to several motor-protective circuit-breakers on terminals 1, 3, 5<br>Protected against accidental contact, short-circuit proof, $U_e = 690\text{ V}$ , $I_u = 63\text{ A}$<br>Can be extended by rotating by installation<br>For PKZM0-... or PKE12, PKE32 without side mounted auxiliary contacts or voltage releases<br>When mounted on the same DIN rail, PKE12/32 and PKZM0 cannot both be connected to a three-phase commoning link. |
| For use with    |  |        | PKZ0, PKE12, PKE32  |
| Circuit-breaker |  | Number | 2   |
| Length          |  | mm     | 90  |
| Unit width      |  | mm     | 45  |

## Technical data

### Main conducting paths

|                                       |           |      |       |
|---------------------------------------|-----------|------|-------|
| Rated impulse withstand voltage       | $U_{imp}$ | V AC | 6000  |
| Overvoltage category/pollution degree |           |      | III/3 |
| Rated operational voltage             | $U_e$     | V AC | 690   |
| Rated uninterrupted current           | $I_u$     | A    | 63    |

## Design verification as per IEC/EN 61439

|  |            |    |  |
|--|------------|----|--|
| Technical data for design verification   |            |    |  |
| Rated operational current for specified heat dissipation   | $I_n$      | A  | 63   |
| Heat dissipation per pole, current-dependent   | $P_{vid}$  | W  | 1  |
| Equipment heat dissipation, current-dependent  | $P_{vid}$  | W  | 3  |
| Static heat dissipation, non-current-dependent   | $P_{vs}$   | W  | 0  |
| Heat dissipation capacity  | $P_{diss}$ | W  | 0  |
| Operating ambient temperature min.   |            | °C | -25  |
| Operating ambient temperature max.   |            | °C | 55   |
| IEC/EN 61439 design verification   |            |    |  |
| 10.2 Strength of materials and parts   |            |    |  |
| 10.2.2 Corrosion resistance  |            |    | Meets the product standard's requirements.                         |
| 10.2.3.1 Verification of thermal stability of enclosures   |            |    |  |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |            |    | Meets the product standard's requirements.                         |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |            |    | Meets the product standard's requirements.                         |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |            |    | Meets the product standard's requirements.                         |
| 10.2.5 Lifting   |            |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact   |            |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions  |            |    | Meets the product standard's requirements.                         |
| 10.3 Degree of protection of ASSEMBLIES  |            |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances   |            |    | Meets the product standard's requirements.                         |
| 10.5 Protection against electric shock   |            |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components   |            |    | Does not apply, since the entire switchgear needs to be evaluated. |

|  |  |  |
|--|--|--|
| 10.7 Internal electrical circuits and connections        |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors                 |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties                               |  |  |
| 10.9.2 Power-frequency electric strength                 |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage                         |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise                                   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                               |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                      |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |


## Technical data ETIM 8.0

|   |                 |       |
|---|-----------------|-------|
| Low-voltage industrial components (EG000017) / Phase busbar (EC000215)  |                 |       |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Phase busbar (ec@ss10.0.1-27-37-13-06 [ACN992011]) |                 |       |
| Number of phases  |                 | 3     |
| Number of poles   |                 | 3     |
| Suitable for number of devices  |                 | 2     |
| Module width  | mm              | 45    |
| Cross section   | mm <sup>2</sup> | 0     |
| Length  | mm              | 90    |
| Width in number of modular spacings   |                 | 5     |
| Rated permanent current I <sub>u</sub>  | A               | 63    |
| Type of electric connection   |                 | Fork  |
| Insulated   |                 | Yes   |
| Rated surge voltage   | kV              | 6     |
| Conditioned rated short-circuit current I <sub>q</sub>  | kA              | 0     |
| Max. rated operation voltage U <sub>e</sub>   | V               | 690   |
| Rated short-time withstand current I <sub>cw</sub>  | kA              | 0     |
| Suitable for devices with N-conductor   |                 | No    |
| Suitable for devices with auxiliary switch  |                 | No    |
| Colour  |                 | Black |

## Approvals

|                                      |  |  |
|--------------------------------------|--|--|
| Product Standards                    |  | UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking |
| UL File No.                          |  | E36332   |
| UL Category Control No.              |  | NLRV   |
| CSA File No.                         |  | 98494  |
| CSA Class No.                        |  | 3211-06  |
| North America Certification          |  | UL listed, CSA certified                           |
| Specially designed for North America |  | No   |

## Dimensions

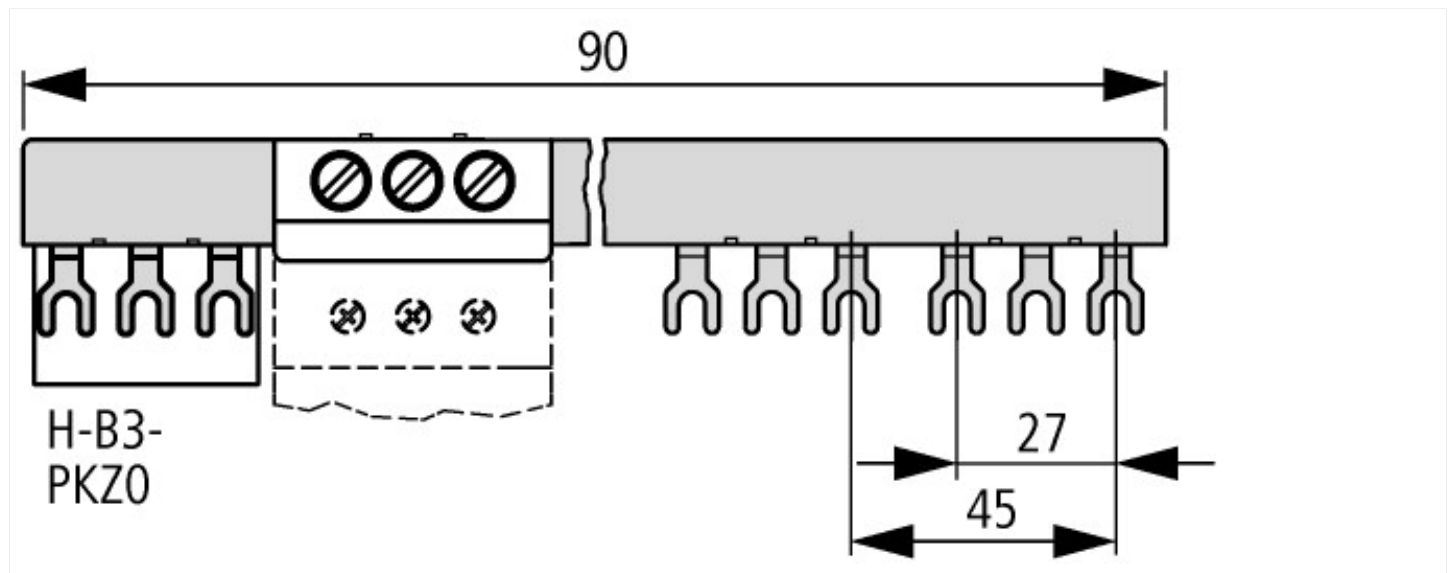

## Additional product information (links)

Motor starters and "Special Purpose Ratings" for the North American market

[http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct\\_3258146.pdf](http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf)

Busbar Component Adapters for modern Industrial control panels

[http://www.moeller.net/binary/ver\\_techpapers/ver960en.pdf](http://www.moeller.net/binary/ver_techpapers/ver960en.pdf)