



Three-phase busbar link, Circuit-breaker: 3, 165 mm

**Part no.** B3.0/3-PKZ4  
**Catalog No.** 220221  
**Alternate Catalog No.** XTPAXCLKA3D

**Delivery program**

Product range		Accessories
Accessories		Three-phase busbar link
		Protected against accidental contact, short-circuit proof, $U_g = 690\text{ V}$ , $I_u = 128\text{ A}$ For PKZM4 without side mounted auxiliary contact or voltage release
For use with		PKZ4 three-phase busbar link
Circuit-breaker	Number	3
Length	mm	165
Unit width	mm	55

**Technical data**

**Main conducting paths**

Rated impulse withstand voltage	$U_{imp}$	V AC	6000
Overvoltage category/pollution degree			III/3
Rated operational voltage	$U_e$	V AC	690
Rated uninterrupted current	$I_u$	A	128

**Design verification as per IEC/EN 61439**

Technical data for design verification			
Rated operational current for specified heat dissipation	$I_n$	A	128
Heat dissipation per pole, current-dependent	$P_{vid}$	W	2.6
Equipment heat dissipation, current-dependent	$P_{vid}$	W	7.8
Static heat dissipation, non-current-dependent	$P_{vs}$	W	0
Heat dissipation capacity	$P_{diss}$	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.

10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


## Technical data ETIM 8.0

Low-voltage industrial components (EG000017) / Phase busbar (EC000215)		
Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Phase busbar (ecl@ss10.0.1-27-37-13-06 [ACN992011])		
Number of phases		3
Number of poles		3
Suitable for number of devices		3
Module width	mm	55
Cross section	mm <sup>2</sup>	0
Length	mm	151
Width in number of modular spacings		9.17
Rated permanent current I <sub>u</sub>	A	128
Type of electric connection		Pin
Insulated		Yes
Rated surge voltage	kV	6
Conditioned rated short-circuit current I <sub>q</sub>	kA	0
Max. rated operation voltage U <sub>e</sub>	V	690
Rated short-time withstand current I <sub>cw</sub>	kA	0
Suitable for devices with N-conductor		No
Suitable for devices with auxiliary switch		No
Colour		Black

## Approvals

Product Standards		UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking
UL File No.		E36332
UL Category Control No.		NLRV
CSA File No.		165628
CSA Class No.		3211-06
North America Certification		UL listed, CSA certified
Specially designed for North America		No

## Dimensions

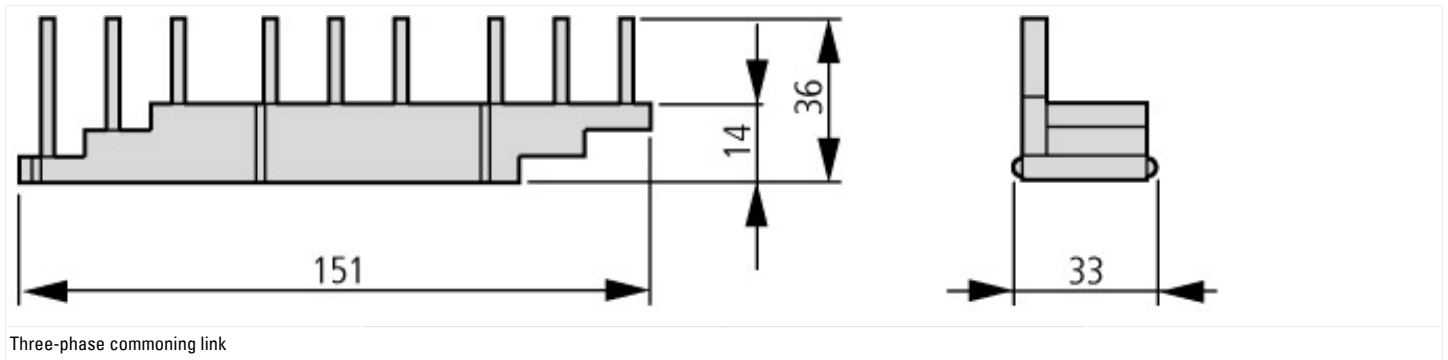

## Additional product information (links)

<b>IL03402003Z (AWA1210-1899) Three-phase commoning link, shroud for unused terminals</b>	
IL03402003Z (AWA1210-1899) Three-phase commoning link, shroud for unused terminals	<a href="https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402003Z2021_07.pdf">https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402003Z2021_07.pdf</a>
Motor starters and "Special Purpose Ratings" for the North American market	<a href="http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf">http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf</a>

