

Incoming terminal PKZM0

Part no.
Article no.

BK25/3-PKZ0
032720

Program

Product range		Accessories
Accessories		Incoming terminal
For use with		PKZM0 PKE

Notes

For three-phase commoning link, protected against accidental contact, $U_e = 690\text{ V}$, $I_u = 63\text{ A}$

For conductor cross-sections:

2.5 - 25 mm² stranded


2.5 - 16 mm² flexible with ferrules

AWG 14 - 6, for use on terminals 1, 3, 5

Approbationen

Product Standards
UL File No.
UL CCN
CSA File No.
CSA Class No.
NA Certification
Specially designed for NA



UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking
E36332
NLRV
12528
3211-05
UL Listed, CSA certified
No



Technical data according to ETIM 4.0

Suitable for			-
Max. conductor cross-section		mm ²	25
Width of terminal		mm	45
Busbar width		mm	0
Busbar thickness		mm	0
Suitable for flat cable connection			No
Suitable for round cable connection			YES
Suitable for sector cable connection			No
Max. rated operational current I _e		A	63

Dimensions

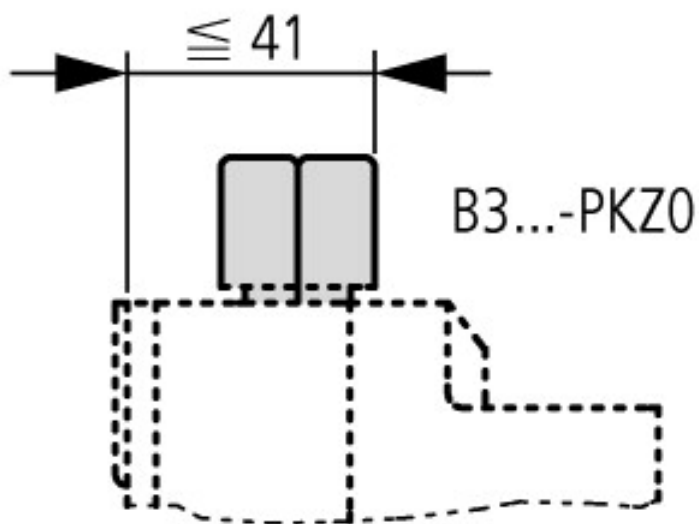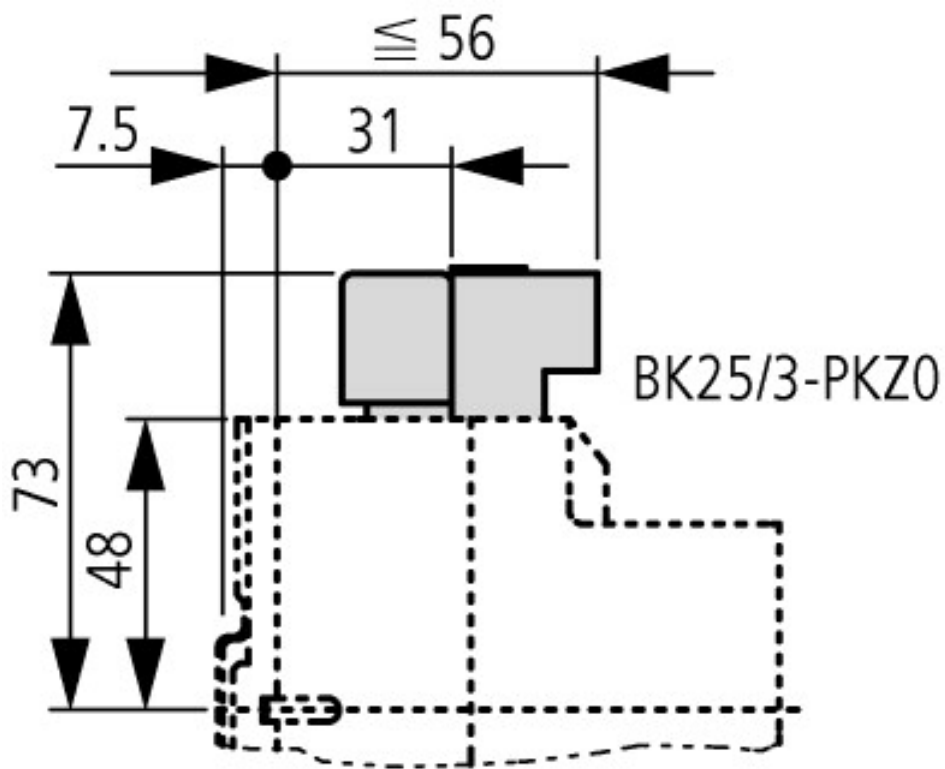

Additional product information (links)

[AWA1210-2295 \(IL03402013Z\) three-phase commoning link](#)

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/22950506.pdf