



**Contactors, 15kW/400V, DC-operated**

**Part no.**

**DILM32-10(RDC24)**

**Article no.**

**277274**



**Delivery programme**

Connection technique			Screw terminals
Actuating voltage			RDC 24: 24 – 27 V DC
Voltage AC/DC			DC operation
			3 pole
Rated operational current			
AC-3			
380 V 400 V	$I_e$	A	32
Max. rating for three-phase motors, 50 – 60 Hz			
AC-3			
220 V 230 V	$P$	kW	10
380 V 400 V	$P$	kW	15
660 V 690 V	$P$	kW	17
AC-4			
220 V 230 V	$P$	kW	4
380 V 400 V	$P$	kW	7
660 V 690 V	$P$	kW	10
Conventional free air thermal current $I_{th} = I_e$ AC-1 at 60 °C			
Open	$I_{th} = I_e$	A	40
Contacts			
N/O = Normally open			1 N/O
Contact sequence			
Can be combined with auxiliary contact			DILM32-XHI.. DILA-XHI(V).. DILM32-XHI11-S

**General**

Standards			IEC/EN 60947, VDE 0660, UL, CSA
Lifespan, mechanical			
AC operated	Operations	$\times 10^6$	10
DC operated	Operations	$\times 10^6$	10
Operating frequency, mechanical			
AC operated	Operations/h		5000
DC operated	Operations/h		5000
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclical, to IEC 60068-2-30
Ambient temperature		°C	
Open		°C	– 25 ... 60
Enclosed		°C	– 25 ... 40
Storage		°C	– 40 - 80
Mounting position, AC- and DC operated			

<b>Mechanical shock resistance (IEC/EN 60068-2-27)</b>			
Half-sinusoidal shock, 10 ms			
Main contacts			
N/O contact		g	10
Auxiliary contacts			
N/O contact		g	7
N/C contact		g	5
<b>Mechanical shock resistance (IEC/EN 60068-2-27) when tabletop-mounted</b>			
Half-sinusoidal shock, 10 ms			
Main contacts			
N/O contact		g	6.9
Auxiliary contacts			
N/O contact		g	5.3
N/C contact		g	3.5
Protection type			
			IP00
Protection against direct contact when actuated from front (IEC 536)			
			Finger- and back-of-hand proof
Weight			
AC operated		kg	0.42
DC operated		kg	0.48
Terminal capacity main cable			
Solid		mm <sup>2</sup>	1 × (0.75 – 16) 2 × (0.75 – 10)
Flexible with ferrule		mm <sup>2</sup>	1 × (0.75 – 16) 2 × (0.75 – 10)
Stranded		mm <sup>2</sup>	1 × 16
Solid or stranded		AWG	18 – 6
Main cable connection screw/bolt			
			M5
Tightening torque			
			Nm
			3
Terminal capacity control circuit cables			
Solid		mm <sup>2</sup>	1 × (0.75 – 4) 2 × (0.75 – 4)
Flexible with ferrule		mm <sup>2</sup>	1 × (0.75 – 1.5) 2 × (0.75 – 1.5)
Solid or stranded		AWG	18 – 14
Control circuit cable connection screw/bolt			
			M3.5
Tightening torque			
			Nm
			1.2
Tool			
Main cable			
Pozidriv screwdriver		Size	2
Standard screwdriver		mm	0.8 × 5.5 1 × 6
Control circuit cables			
Pozidriv screwdriver		Size	2
Standard screwdriver		mm	0.8 × 5.5 1 × 6
Terminal capacity control circuit cables			
Solid		mm <sup>2</sup>	1 × (0.75 – 2.5) 2 × (0.75 – 2.5)
Flexible		mm <sup>2</sup>	1 × (0.75 – 1.5) 2 × (0.75 – 1.5)
Flexible with ferrule		mm <sup>2</sup>	1 × (0.75 – 1.5) 2 × (0.75 – 1.5)
Solid or stranded		AWG	18 – 14
Tool			
Stripping length			
			mm
			10
Screwdriver blade width			
			mm
			3.5
<b>Main conducting paths</b>			
Rated impulse withstand voltage		$U_{imp}$	V AC
			8000

Overvoltage category/pollution degree			III/3
Rated insulation voltage	$U_i$	V AC	690
Rated operational voltage	$U_e$	V AC	690
Safe isolation to VDE 0106 Part 101 and Part 101/A1			
between coil and contacts		V AC	440
between the contacts		V AC	440
Making capacity (p.f. to IEC/EN 60947)			
	Up to 690 V	A	384
Breaking capacity			
230 V		A	320
380/400 V		A	320
500 V		A	320
660/690 V		A	180
Short-circuit rating			
Short-circuit protection maximum fuse			
Type "2" coordination			
400 V	gG/gL 500 V	A	63
690 V	gG/gL 690 V	A	35
Type "1" coordination			
400 V	gG/gL 500 V	A	125
690 V	gG/gL 690 V	A	63

## AC

AC-1 duty			
conv. therm. current 3 pole 50 – 60 Hz			
open			
at 40 °C	$I_{th}$	A	45
at 50 °C	$I_{th}$	A	43
at 55 °C	$I_{th}$	A	42
at 60 °C	$I_{th}$	A	40
enclosed	$I_{th}$	A	36
Conventional free air thermal current, 1 pole			
open	$I_{th}$	A	100
enclosed	$I_{th}$	A	90
AC-3 duty			
Rated operational current AC-3 open, 50 – 60 Hz, 3 pole	$I_e$		
230 V	$I_e$	A	32
240 V	$I_e$	A	32
380/400 V	$I_e$	A	32
415 V	$I_e$	A	32
440V	$I_e$	A	32
500 V	$I_e$	A	32
660/690 V	$I_e$	A	18
Motor rating	$P$	$P$	
230 V	$P$	kW	10
240V	$P$	kW	11
380/400 V	$P$	kW	15
415 V	$P$	kW	19
440 V	$P$	kW	20
500 V	$P$	kW	23
660/690 V	$P$	kW	17
AC-4 duty			
Rated operational current AC-4 open, 50 – 60 Hz, 3 pole	$I_e$		
230 V	$I_e$	A	15
240 V	$I_e$	A	15

380/400 V	$I_e$	A	15
415 V	$I_e$	A	15
440 V	$I_e$	A	15
500 V	$I_e$	A	15
660/690 V	$I_e$	A	12
Motor rating	$P$	$P$	
230 V	$P$	kW	4
240 V	$P$	kW	4.5
380/400 V	$P$	kW	7
415 V	$P$	kW	7.5
440 V	$P$	kW	8
500 V	$P$	kW	9
660/690 V	$P$	kW	10

## DC

Rated operational current, open			
DC-1 operation			
60 V	$I_e$	A	40
110 V	$I_e$	A	40
220 V	$I_e$	A	40
440 V	$I_e$	A	2.9
DC-3 operation			
60 V	$I_e$	A	40
110 V	$I_e$	A	40
220 V	$I_e$	A	25
440 V	$I_e$	A	0.6
DC-5 operation			
60 V	$I_e$	A	40
110 V	$I_e$	A	40
220 V	$I_e$	A	10
440 V	$I_e$	A	0.6

## Current heat loss (3 pole)

Current heat loss at $I_{th}$		W	12.1
Current heat loss at $I_e$ to AC-3/400 V		W	6.1
Impedance per pole		m $\Omega$	2

## Magnet systems

Voltage tolerance			
AC operated	Pick-up	$\times U_c$	0.8 ... 1.1
Drop-out voltage AC operated	Drop-out	$\times U_c$	0.3 ... 0.6
DC operated	Pick-up	$\times U_c$	0.7 ... 1.2
DC operated	Drop-out	$\times U_c$	0.15 ... 0.6
Power consumption of the coil in a cold state and $1.0 \times U_c$			
50 Hz	Pick-up	VA	52
50 Hz	Sealing	VA	7.1
50 Hz	Sealing	W	2.1
60 Hz	Pick-up	VA	67
60 Hz	Sealing	VA	8.7
60 Hz	Sealing	W	2.6
50/60 Hz	Pick-up	VA	62 58
50/60 Hz	Sealing	VA	9.1 6.5
50/60 Hz	Sealing	W	2.5 2
DC operated	Pick-up	W	12
DC operated	Sealing	W	0.5


Duty factor		% DF	100
Switching times at 100 % $U_c$ (approximate values)			
<b>Main contacts</b>			
AC operated			
Closing delay		ms	16 ... 22
Opening delay		ms	8 ... 14
DC operated			
Closing delay		ms	47
Opening delay		ms	30
Arcing time		ms	10
Lifespan, mechanical; Coil 50/60 Hz	at 50 Hz		Mechanical lifespan at 50 Hz approx. 30% lower than under "Technical data, general"

**Electromagnetic compatibility (EMC)**

Emitted interference			to EN 60947-1
Interference immunity			to EN 60947-1


**Notes**

**Notes** The following applies to magnet systems, voltage tolerance, pickup voltage DC-operated DILM17 – DILM32:  
RDC 24 ( $U_{min}$  24 V DC/ $U_{max}$  27 V DC)  
RDC 60 ( $U_{min}$  48 V DC/ $U_{max}$  60 V DC)  
RDC 130 ( $U_{min}$  110 V DC/ $U_{max}$  130 V DC)  
RDC 240 ( $U_{min}$  200 V DC/ $U_{max}$  240 V DC)  
Example:  
 $U_c = 0.7 \times U_{min} - 1.2 \times U_{max}$   
 $U_c = 0.7 \times 24 V - 1.2 \times 27 V DC$   
With voltage tolerance and DC operated power consumption the following applies: At least smoothed double-pulse bridge rectification or a three-phase current rectifier is necessary

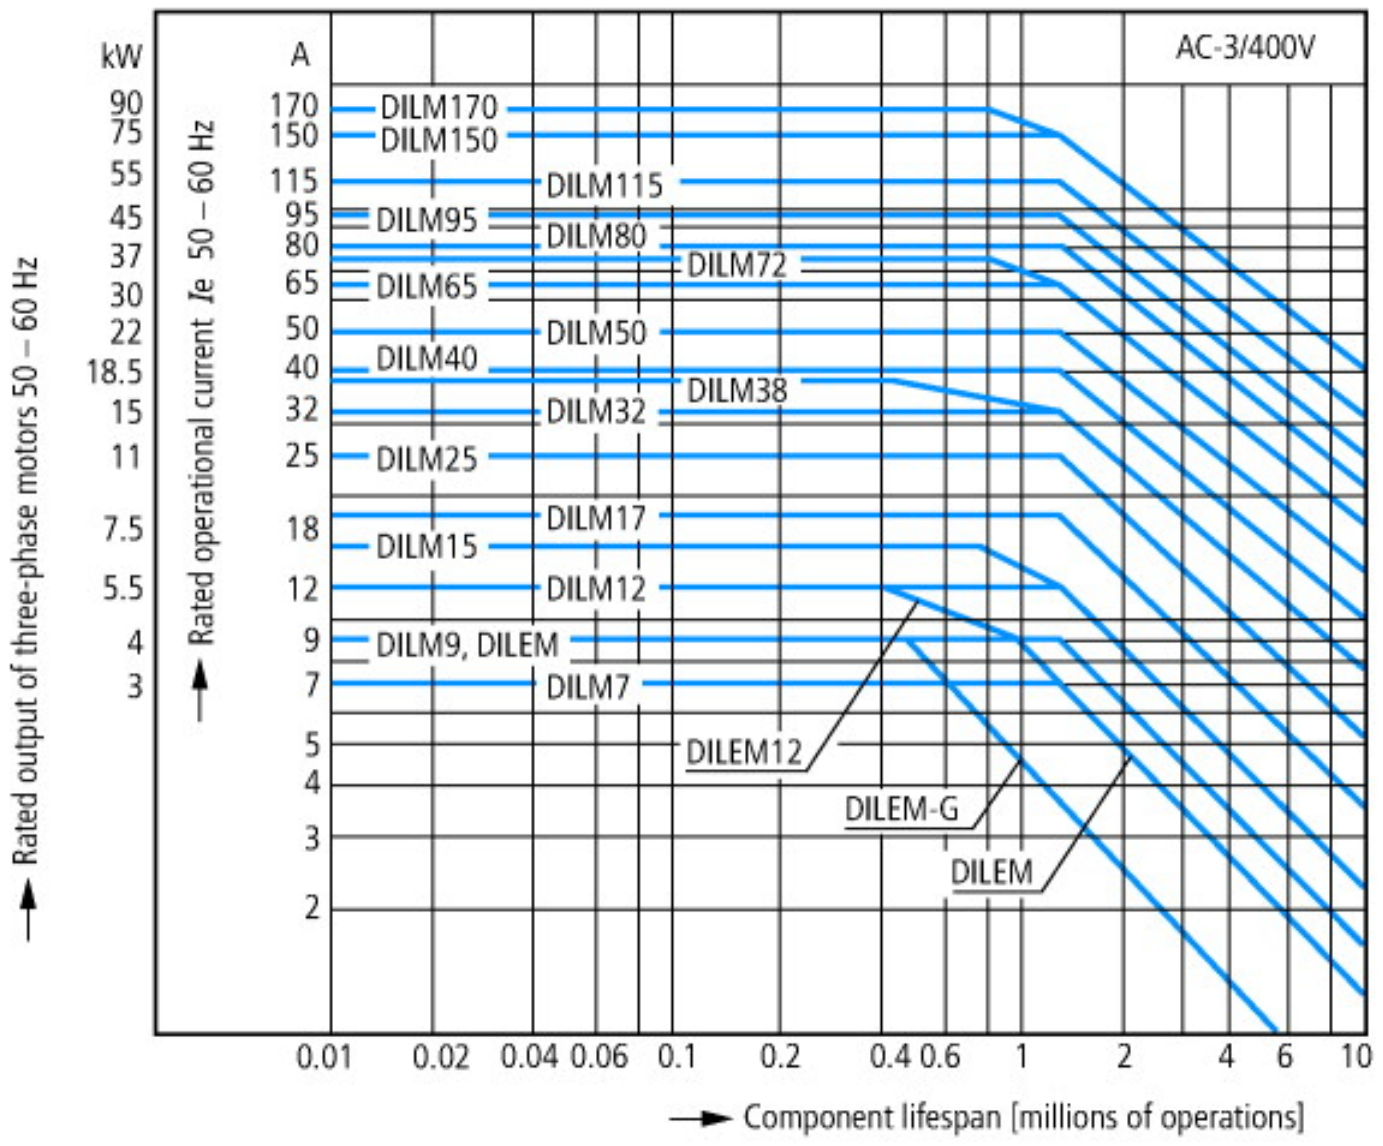



Squirrel-cage motor  
Operating characteristics


Starting: from rest  
 Stopping: after attaining full running speed  
 Electrical characteristics  
 Make: up to 6 × rated motor current  
 Break: up to 1 × rated motor current  
 Utilization category  
 100 % AC-3  
 Typical applications  
 Compressors  
 Lifts  
 Mixers  
 Pumps  
 Escalators  
 Agitators  
 Fans  
 Conveyor belts  
 Centrifuges  
 Hinged flaps  
 Bucket-elevators  
 Air conditioning system  
 General drives in manufacturing and processing machines

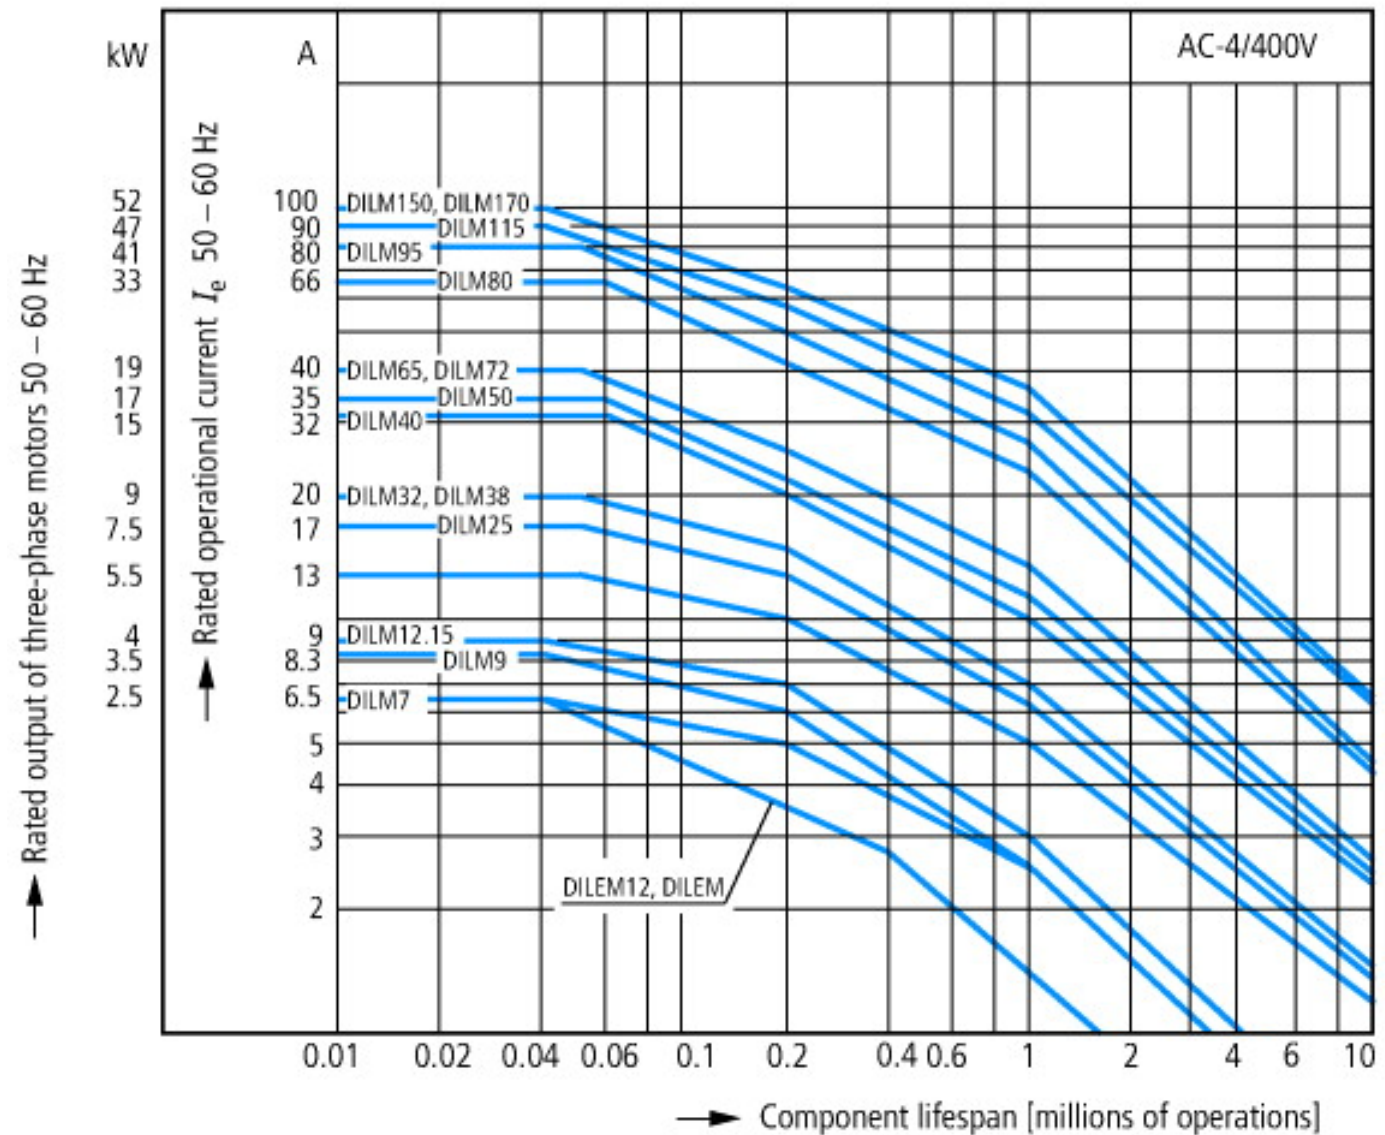

Extreme switching duty  
 Squirrel-cage motor  
 Operating characteristics  
 Inching, plugging, reversing  
 Electrical characteristics  
 Make: up to 6 × rated motor current  
 Break: up to 6 × rated motor current  
 Utilization category  
 100 % AC-4  
 Typical applications  
 Printing presses  
 Wire-drawing machines  
 Centrifuges  
 Special drives for manufacturing and processing machines

Dimensions

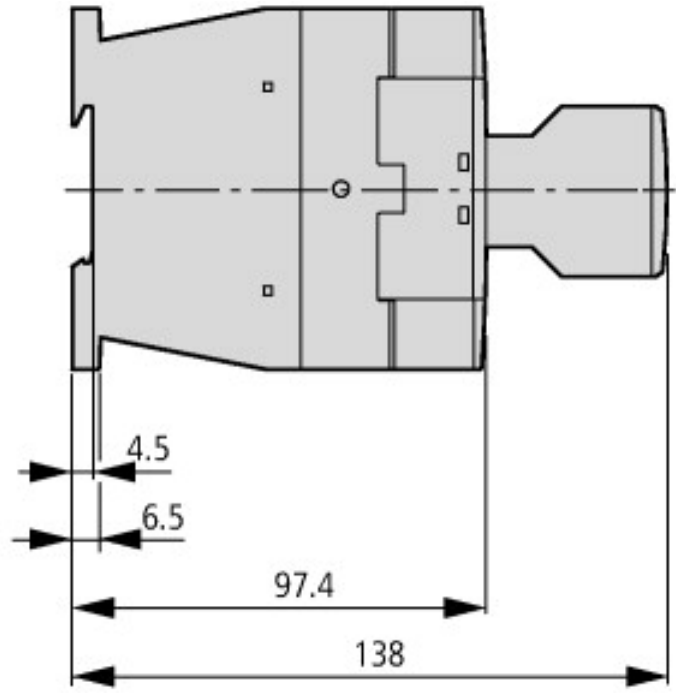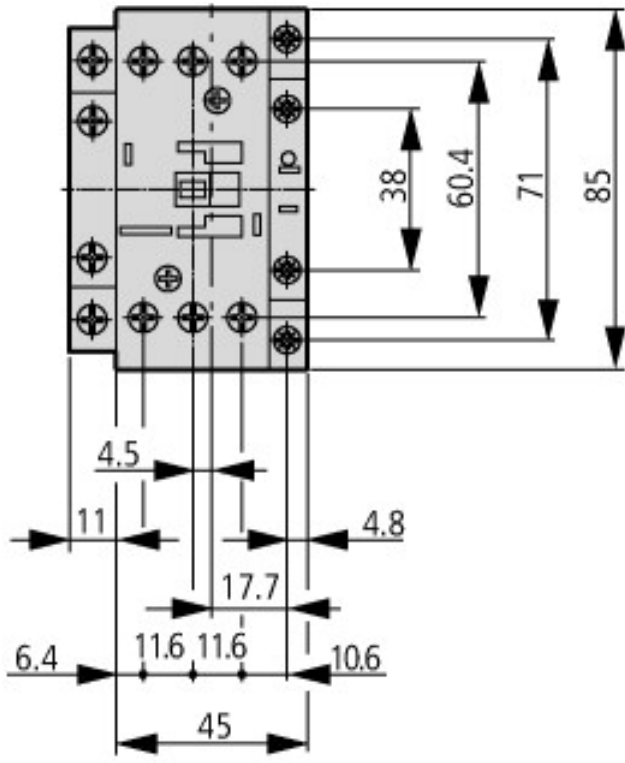

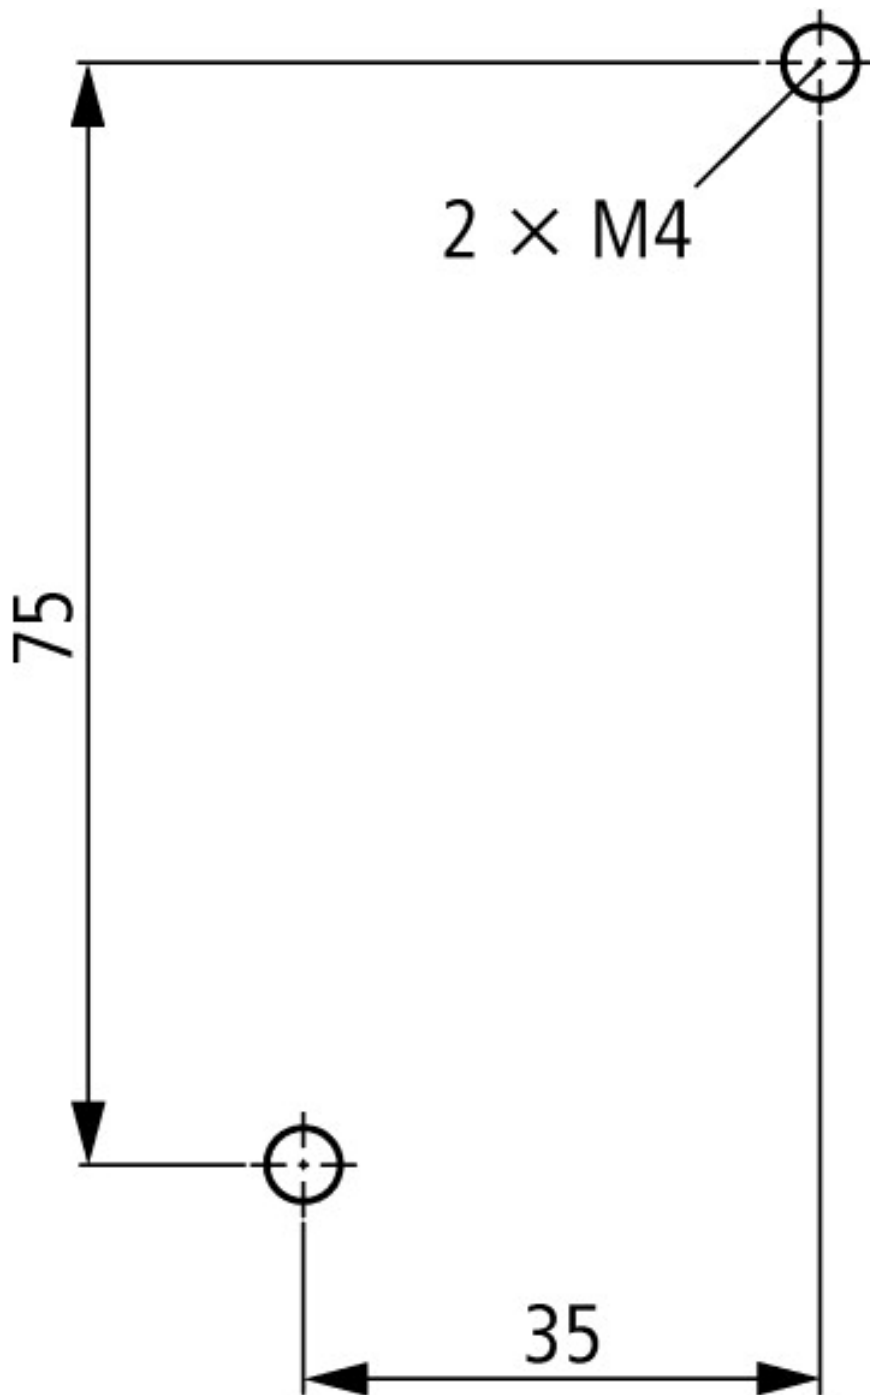

Lateral clearance to earthed parts: 6 mm

Contactor with auxiliary contact module

DILM17...DILM38  
DILMC17...DILMC32  
DILMF8...DILMF32

### Additional product information (links)

#### Installation instructions

AWA2100-2127 Contactors

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/21270608.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/21270608.pdf)