



Auxiliary contact, 1N/O+1N/C, for P1-P3

Part no. HI11-P1/P3E
Article no. 061813
Catalog No. SPX-HI11-P1-P3EQ

Delivery programme

Product range			Accessories
Basic function			Auxiliary contact
Part group reference			P1 P3
			Late-break switching-on behavior, early-make switching-off behavior The N/O is always connected as a load-shedding contact. For left and/or right side mounting
Contacts			1 N/O, 1 N/C
For use with			P1-.../E, .../EA..., .../EZ P3-.../E, .../EA
Contacts			1 N/O, 1 N/C
Rated uninterrupted current	I_u	A	10


Approvals

Product Standards	UL 508; CSA-C22.2 No. 14-05; IEC/EN 60947-5; CE marking
UL File No.	E36332
UL Category Control No.	NLRV
CSA File No.	12528
CSA Class No.	3211-05
North America Certification	UL listed, CSA certified

Technical data ETIM 5.0

Low-voltage industrial components (EG000017) / Auxiliary contact block (EC000041)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Auxiliary switch block (ecl@ss8-27-37-13-02 [AKN342009])			
Number of contacts as change-over contact			0
Number of contacts as normally open contact			1
Number of contacts as normally closed contact			1
Rated operation current I_e at AC-15, 230 V		A	6
Type of electric connection			Screw connection
Mounting method			-

Dimensions

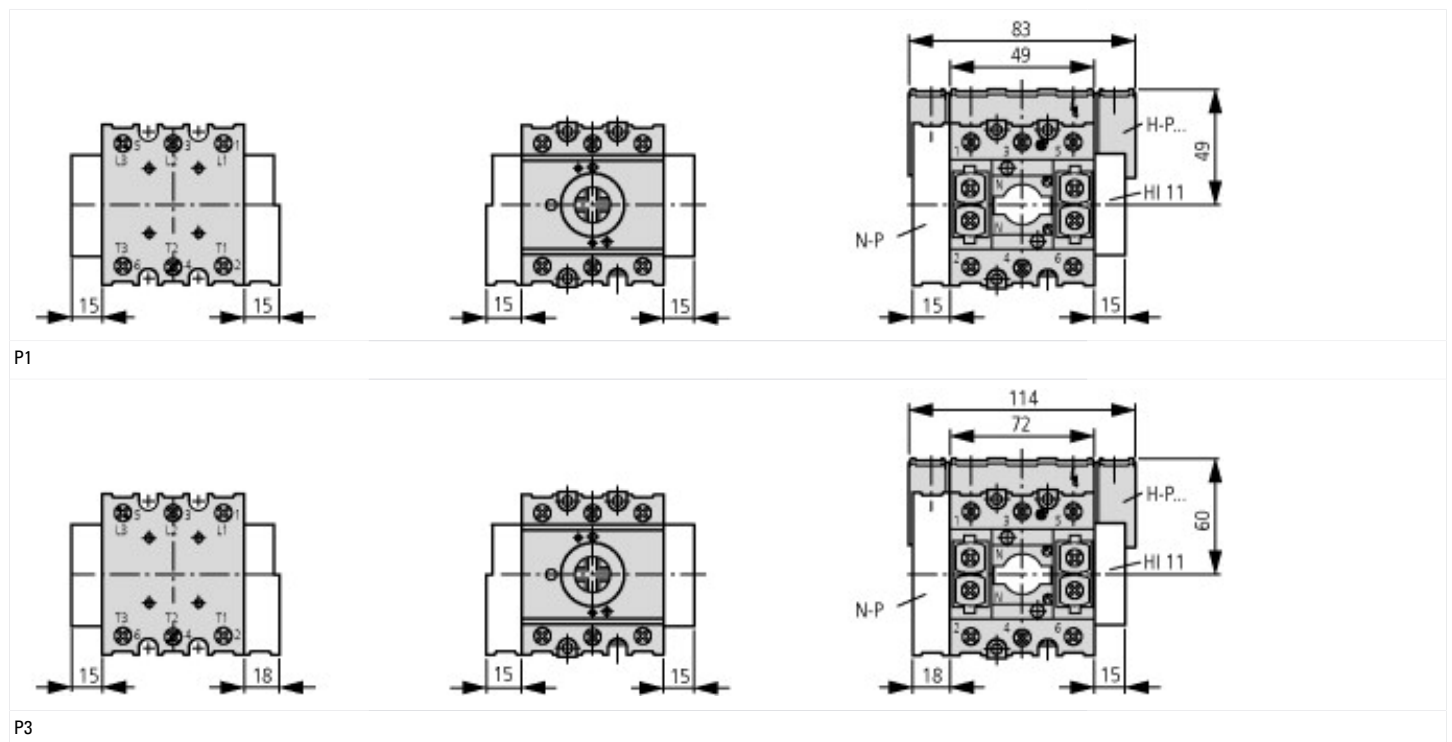

Additional product information (links)

Technical overview cam switch, switch-disconnector	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.2
System overview cam switch T	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.4
System overview switch-disconnector P	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.6
Key to part numbers Cam switch	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8
Key to part numbers Switch-disconnector	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8