

PR2-RSC3-LDP-24DC/4X21AU


Order No.: 2834724

The figure shows the 24 V DC version



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=2834724>

Preassembled relay modules with screw connection, consisting of: Relay socket, industrial relay with integrated LED, free-wheeling diode and engage/disengage manual actuate lever, and retaining bracket. Input voltage: 24 V DC, four PDTs with gold-plated contacts, 5 A

Commercial data	
EAN	4  046356 044554
Pack	5 Pcs.
Customs tariff	85364900
Product key	106301
Catalog page information	Page 78 (IF-2011)

Product notes

WEEE/RoHS-compliant since: 08/22/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
Coil side	
Nominal input voltage U_N	24 V DC
Nominal input current at U_{IN}	38 mA
Typical response time	13 ms

Typical release time	5 ms
Operating voltage display	Green LED
Protective circuit	Damping diode

Contact side

Contact type	Single contact, 4-PDT
Contact material	AgNi, hard gold-plated
Maximum switching voltage	250 V AC 125 V DC
Minimum switching voltage	1 V
Maximum inrush current	12 A (15 ms)
Min. switching current	1 mA
Limiting continuous current	5 A
Interrupting rating (ohmic load) max.	1250 VA

General data

Width	27 mm
Height	78.5 mm
Depth	86 mm
Test voltage relay winding/relay contact	2 kV (50 Hz, 1 min.)
Test voltage relay contact/relay contact	2 kV (50 Hz, 1 min.)
Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Operating mode	100% operating factor
Mechanical service life	5 x 10 ⁷ cycles
Standards/regulations	IEC 60664 EN 50178 IEC 62103
Pollution degree	2
Surge voltage category	II
Mounting position	Any
Assembly instructions	In rows with zero spacing

Connection data

Connection method	Screw connection
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	2.5 mm ²


Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	14
Stripping length	7 mm

Article Sets


Item	Designation	Description
Allgemein		
2833592	EL2-P35	Relay retaining bracket, with eject function and integrated equipment marking area (8 x 25 mm), to suit relay socket PR2, for 35 mm high industrial relay
2833576	PR2-BSC3/4X21	Relay socket PR2-B, for industrial relay REL-IR with 2 or 4 PDT, 1/3-level version, screw connections, connection facility for input/interference suppression modules, for mounting on NS 35/7.5
2834096	REL-IR/LDP- 24DC/4X21AU	Pluggable industrial relays with power contacts and additional hard gold plating, 4 PDT, test button, status LED, free-wheeling diode, mechanical switch position indicator, polarity A1+ , A2- , coil voltage: 24 V DC

Drawings


Diagram

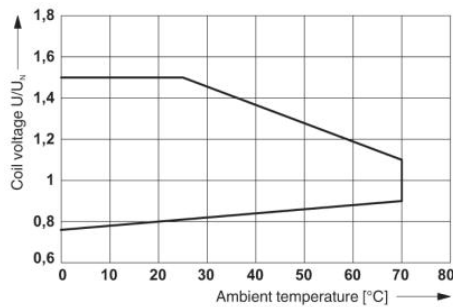


Operating voltage range of relay $T_u = T_{coil}$

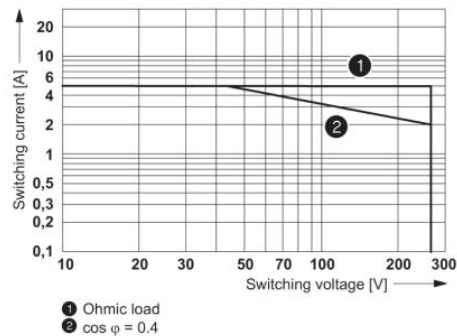

AC interrupting rating

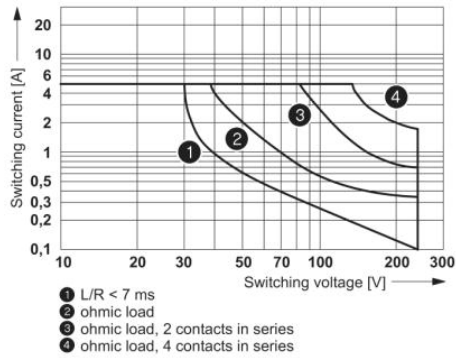


DC interrupting rating

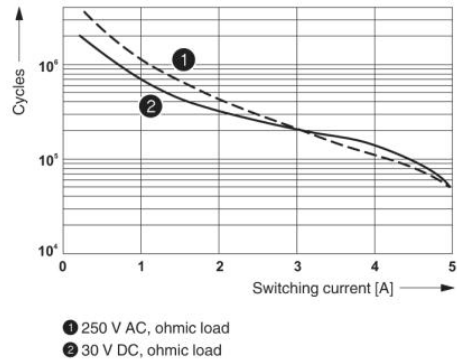

Electrical service life

Circuit diagram

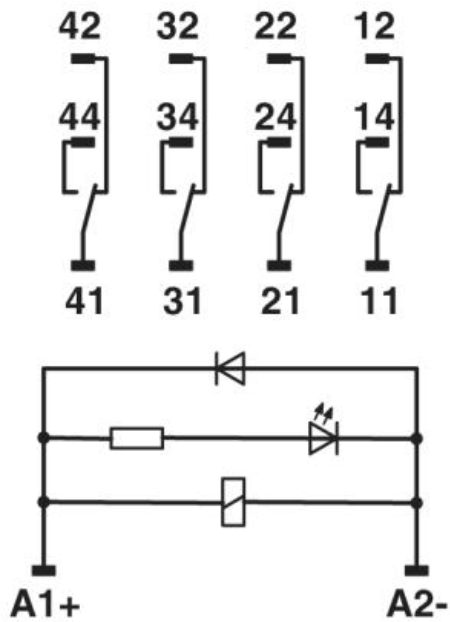

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2012 Phoenix Contact
Technical modifications reserved;