


REL-MR- 24DC/21HC/MS

Order No.: 2987888

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2987888>

Pluggable miniature relays, with power contact for high continuous current, 1 PDT, test button, mechanical switch position indicator, integrated LED and free-wheeling diode, input voltage 24 V AC

Commercial data	
GTIN (EAN)	
sales group	G084
Pack	10 pcs.
Customs tariff	85364190
Product key	106084
country of origin	CN
Catalog page information	Page 62 (IF-2011)

Product notesWEEE/RoHS-compliant since:
12/16/2008

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
Coil side	
Nominal input voltage U_N	24 V DC
Input voltage range in reference to U_N	(refer to the diagram)
Nominal input current at U_{IN}	18 mA
Typical response time	9 ms
Typical release time	6 ms

Contact side

Contact type	Single contact, 1-PDT
Contact material	AgNi
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	6 V AC/DC
Maximum inrush current	30 A (300 ms)
Min. switching current	100 mA
Limiting continuous current	16 A
Interrupting rating (ohmic load) max.	4000 VA (for 250 V AC)

General data

Width	12.7 mm
Height	29 mm
Depth	25 mm
Test voltage relay winding/relay contact	5 kV AC (50 Hz, 1 min.)
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Mechanical service life	5 x 10 ⁶ cycles
Standards/regulations	DIN EN 61810-1
	VDE 0435-201
	EN 50178
	IEC 62103

Certificates / Approvals



Certification



CUL, UL, VDE-PZI

Additional products

Item	Designation	Description
Relay base		
2833521	PR1-BSC3/2X21	Relay socket PR1..., for miniature power relay or miniature switching relay with 1 or 2 PDT or solid-state relay of same construction, 1/3 level design, screw connections, connection facility for input/interference suppression modules
2833534	PR1-BSP3/2X21	Relay socket PR1..., for miniature power relay or miniature switching relay with 1 or 2 PDT or solid-state relay of same construction, 1/3 level design, spring-cage connections, connection facility for input/interference suppression modules


Diagrams/Drawings

Diagram

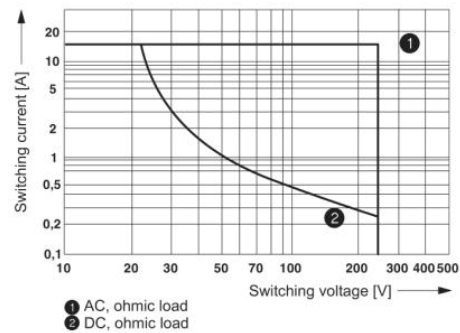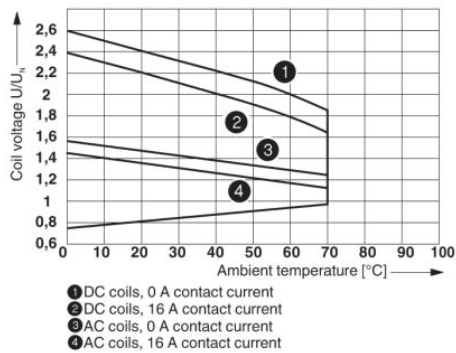


Interrupting rating

Operating voltage range

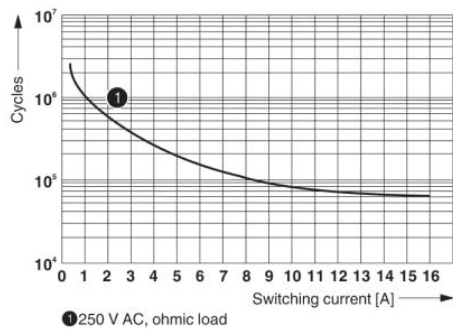

Electrical service life

Circuit diagram

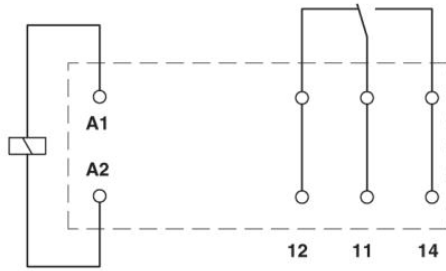

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2012 Phoenix Contact
Technical modifications reserved;