

## Feed-through terminal block - UT 2,5/1P - 3045017

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Feed-through terminal block, Connection method: Screw/plug-in connection, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type: NS 35/7,5, NS 35/15

### Why buy this product

- Terminal blocks that can be connected on both sides available
- Compatible with standard UT terminal blocks
- Uniform, touch-proof plug-in zone

### Key Commercial Data

Packing unit	50 STK
GTIN	
GTIN	4017918975357
Weight per Piece (excluding packing)	6.600 g
Weight per piece (including packing)	7.100 g
Custom tariff number	85369010
Country of origin	Germany

### Technical data

#### General

Number of levels	1
Number of connections	2
Potentials	1
Nominal cross section	2.5 mm <sup>2</sup>
Color	gray
Insulating material	PA
Flammability rating according to UL 94	V0
Rated surge voltage	6 kV
Degree of pollution	3

# Feed-through terminal block - UT 2,5/1P - 3045017

## Technical data

### General

Overvoltage category	III
Insulating material group	I
Maximum load current	24 A (with 4 mm <sup>2</sup> conductor cross section)
Nominal current I <sub>N</sub>	24 A
Nominal voltage U <sub>N</sub>	500 V
Open side panel	Yes
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Static insulating material application in cold	-60 °C
Behavior in fire for rail vehicles (DIN 5510-2)	Test passed
Flame test method (DIN EN 60695-11-10)	V0
Oxygen index (DIN EN ISO 4589-2)	>32 %
NF F16-101, NF F10-102 Class I	2
NF F16-101, NF F10-102 Class F	2
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3

### Dimensions

Width	5.2 mm
End cover width	2.2 mm
Length	49.1 mm
Height NS 35/7,5	47.5 mm
Height NS 35/15	55 mm

### Connection data

Connection method	Screw/plug-in connection
Connection in acc. with standard	IEC 61984
Conductor cross section solid min.	0.14 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section AWG min.	26
Conductor cross section AWG max.	12
Conductor cross section flexible min.	0.14 mm <sup>2</sup>
Conductor cross section flexible max.	4 mm <sup>2</sup>
Min. AWG conductor cross section, flexible	26
Max. AWG conductor cross section, flexible	12

## Feed-through terminal block - UT 2,5/1P - 3045017

### Technical data

#### Connection data

Conductor cross section flexible, with ferrule without plastic sleeve min.	0.14 mm <sup>2</sup>
Conductor cross section flexible, with ferrule without plastic sleeve max.	2.5 mm <sup>2</sup>
Conductor cross section flexible, with ferrule with plastic sleeve min.	0.14 mm <sup>2</sup>
Conductor cross section flexible, with ferrule with plastic sleeve max.	2.5 mm <sup>2</sup>
2 conductors with same cross section, solid min.	0.14 mm <sup>2</sup>
2 conductors with same cross section, solid max.	1.5 mm <sup>2</sup>
2 conductors with same cross section, stranded min.	0.14 mm <sup>2</sup>
2 conductors with same cross section, stranded max.	1.5 mm <sup>2</sup>
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm <sup>2</sup>
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	1.5 mm <sup>2</sup>
2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.	0.14 mm <sup>2</sup>
2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.	1.5 mm <sup>2</sup>
Stripping length	9 mm
Internal cylindrical gage	A3
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm

#### Standards and Regulations

Connection in acc. with standard	CSA
	IEC 61984
Flammability rating according to UL 94	V0

#### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


### Drawings

# Feed-through terminal block - UT 2,5/1P - 3045017

Circuit diagram




Diagram

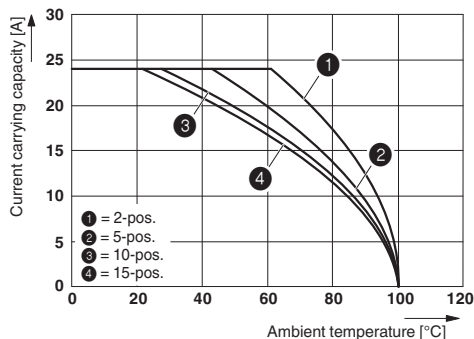

The figure shows the derating curve of the UT 2,5/1P... terminal block in connection with the UPBV 2,5 plug

Dimensional drawing



## Classifications

### eCl@ss

eCl@ss 4.0	27141117
eCl@ss 4.1	27141117
eCl@ss 5.0	27141120
eCl@ss 5.1	27141120
eCl@ss 6.0	27141120
eCl@ss 7.0	27141120
eCl@ss 8.0	27141120
eCl@ss 9.0	27141120

### ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC000897
ETIM 5.0	EC000897

### UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410

# Feed-through terminal block - UT 2,5/1P - 3045017

## Classifications

### UNSPSC

UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

## Approvals


### Approvals


#### Approvals


CSA / UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

#### Ex Approvals

## Approval details

CSA  <a href="http://www.csagroup.org/services/testing-and-certification/certified-product-listing/">http://www.csagroup.org/services/testing-and-certification/certified-product-listing/</a> 13631		
	B	C
mm <sup>2</sup> /AWG/kcmil	26-12	26-12
Nominal current IN	20 A	20 A
Nominal voltage UN	300 V	300 V

UL Recognized  <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> FILE E 60425	
mm <sup>2</sup> /AWG/kcmil	26-12
Nominal current IN	20 A
Nominal voltage UN	300 V

cUL Recognized  <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> FILE E 60425	
mm <sup>2</sup> /AWG/kcmil	26-12
Nominal current IN	20 A
Nominal voltage UN	300 V

EAC 7500651.22.01.00246
-------------------------

# Feed-through terminal block - UT 2,5/1P - 3045017

## Approvals

EAC EAC-Zulassung

cULus Recognized  <http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

## Accessories

### Accessories

#### Coding element

Coding star - PC - 3040588



Coding star, Length: 3 mm, Width: 3 mm, Height: 6 mm, Color: red

---

## DIN rail

DIN rail perforated - NS 35/ 7,5 PERF 2000MM - 0801733



DIN rail, material: steel galvanized and passivated with a thick layer, perforated, height 7.5 mm, width 35 mm, length: 2000 mm

---

DIN rail, unperforated - NS 35/ 7,5 UNPERF 2000MM - 0801681



DIN rail, material: Steel, unperforated, height 7.5 mm, width 35 mm, length: 2 m

---

DIN rail perforated - NS 35/ 7,5 WH PERF 2000MM - 1204119



DIN rail 35 mm (NS 35)

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

DIN rail - NS 35/ 7,5 WH UNPERF 2000MM - 1204122



DIN rail 35 mm (NS 35)

---

DIN rail, unperforated - NS 35/ 7,5 AL UNPERF 2000MM - 0801704



DIN rail, unperforated, Width: 35 mm, Height: 7.5 mm, Length: 2000 mm, Color: silver

---

DIN rail perforated - NS 35/ 7,5 ZN PERF 2000MM - 1206421



DIN rail, material: Galvanized, perforated, height 7.5 mm, width 35 mm, length: 2 m

---

DIN rail, unperforated - NS 35/ 7,5 ZN UNPERF 2000MM - 1206434



DIN rail, material: Galvanized, unperforated, height 7.5 mm, width 35 mm, length: 2 m

---

DIN rail, unperforated - NS 35/ 7,5 CU UNPERF 2000MM - 0801762



DIN rail, material: Copper, unperforated, height 7.5 mm, width 35 mm, length: 2 m

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

End cap - NS 35/ 7,5 CAP - 1206560

DIN rail end piece, for DIN rail NS 35/7.5



---

DIN rail perforated - NS 35/15 PERF 2000MM - 1201730



DIN rail, material: steel galvanized and passivated with a thick layer, perforated, height 15 mm, width 35 mm, length: 2000 mm

---

DIN rail, unperforated - NS 35/15 UNPERF 2000MM - 1201714



DIN rail, material: Steel, unperforated, height 15 mm, width 35 mm, length: 2 m

---

DIN rail perforated - NS 35/15 WH PERF 2000MM - 0806602



DIN rail 35 mm (NS 35)

---

DIN rail - NS 35/15 WH UNPERF 2000MM - 1204135



DIN rail 35 mm (NS 35)



## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

DIN rail, unperforated - NS 35/15 AL UNPERF 2000MM - 1201756



DIN rail, deep drawn, high profile, unperforated, 1.5 mm thick, material: aluminum, height 15 mm, width 35 mm, length 2000 mm

---

DIN rail perforated - NS 35/15 ZN PERF 2000MM - 1206599



DIN rail, material: Galvanized, perforated, height 15 mm, width 35 mm, length: 2 m

---

DIN rail, unperforated - NS 35/15 ZN UNPERF 2000MM - 1206586



DIN rail, material: Galvanized, unperforated, height 15 mm, width 35 mm, length: 2 m

---

DIN rail, unperforated - NS 35/15 CU UNPERF 2000MM - 1201895



DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m

---

End cap - NS 35/15 CAP - 1206573



DIN rail end piece, for DIN rail NS 35/15

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

DIN rail, unperforated - NS 35/15-2,3 UNPERF 2000MM - 1201798



DIN rail, material: Steel, unperforated, 2.3 mm thick, height 15 mm, width 35 mm, length: 2 m

---

### End block

End clamp - CLIPFIX 35 - 3022218



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

---

End clamp - CLIPFIX 35-5 - 3022276



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

---

End clamp - E/NS 35 N - 0800886



End clamp, width: 9.5 mm, color: gray

---

### End cover

End cover - D-UT 2,5/1P - 3047154



End cover, Length: 47.6 mm, Width: 2.2 mm, Height: 39.8 mm, Color: gray

---

### Flange

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Screw flange - UT 2,5/1P-F - 3060445



Screw flange, for screwing COMBI plugs, with the same structure and pitch as the relevant COMBI terminal blocks

---

### Front adapter

Front adapters - VIP-PA-PWR/2X10COMBI/ 0,5M/S7 - 2904713



VIP power cabling, universal front adapter for connecting all common 20-pos. SIMATIC S7-300 I/O modules, via two cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, Cable length: 0.5 m

---

Front adapters - VIP-PA-PWR/2X10COMBI/ 1,0M/S7 - 2904714



VIP power cabling, universal front adapter for connecting all common 20-pos. SIMATIC S7-300 I/O modules, via two cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, Cable length: 1 m

---

Front adapters - VIP-PA-PWR/2X10COMBI/ 1,5M/S7 - 2904715



VIP power cabling, universal front adapter for connecting all common 20-pos. SIMATIC S7-300 I/O modules, via two cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, Cable length: 1.5 m

---

Front adapters - VIP-PA-PWR/2X10COMBI/ 2,0M/S7 - 2904716



VIP power cabling, universal front adapter for connecting all common 20-pos. SIMATIC S7-300 I/O modules, via two cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, Cable length: 2 m

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

#### Front adapters - VIP-PA-PWR/2X10COMBI/ 2,5M/S7 - 2904717



VIP power cabling, universal front adapter for connecting all common 20-pos. SIMATIC S7-300 I/O modules, via two cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, Cable length: 2.5 m

---

#### Front adapters - VIP-PA-PWR/2X10COMBI/ 3,0M/S7 - 2904718



VIP power cabling, universal front adapter for connecting all common 20-pos. SIMATIC S7-300 I/O modules, via two cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, Cable length: 3 m

---

#### Front adapters - VIP-PA-PWR/2X10COMBI/10,0M/S7 - 2904723



VIP power cabling, universal front adapter for connecting all common 20-pos. SIMATIC S7-300 I/O modules, via two cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, Cable length: 10 m

---

#### Front adapters - VIP-PA-PWR/4X10COMBI/ 0,5M/S7 - 2904702



VIP power cabling, universal front adapter for connecting all common 40-pos. SIMATIC S7-300 I/O modules, via four cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, Cable length: 0.5 m

---

#### Front adapters - VIP-PA-PWR/4X10COMBI/ 1,0M/S7 - 2904703



VIP power cabling, universal front adapter for connecting all common 40-pos. SIMATIC S7-300 I/O modules, via four cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, Cable length: 1 m

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Front adapters - VIP-PA-PWR/4X10COMBI/ 1,5M/S7 - 2904704



VIP power cabling, universal front adapter for connecting all common 40-pos. SIMATIC S7-300 I/O modules, via four cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, Cable length: 1.5 m

---

Front adapters - VIP-PA-PWR/4X10COMBI/ 2,0M/S7 - 2904705



VIP power cabling, universal front adapter for connecting all common 40-pos. SIMATIC S7-300 I/O modules, via four cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, Cable length: 2 m

---

Front adapters - VIP-PA-PWR/4X10COMBI/ 2,5M/S7 - 2904706



VIP power cabling, universal front adapter for connecting all common 40-pos. SIMATIC S7-300 I/O modules, via four cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, Cable length: 2.5 m

---

Front adapters - VIP-PA-PWR/4X10COMBI/ 3,0M/S7 - 2904707



VIP power cabling, universal front adapter for connecting all common 40-pos. SIMATIC S7-300 I/O modules, via four cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, Cable length: 3 m

---

Front adapters - VIP-PA-PWR/4X10COMBI/10,0M/S7 - 2904712



VIP power cabling, universal front adapter for connecting all common 40-pos. SIMATIC S7-300 I/O modules, via four cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, Cable length: 10 m

---

### Insulating sleeve

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Insulating sleeve - MPS-IH WH - 0201663



Insulating sleeve, Color: white

---

Insulating sleeve - MPS-IH RD - 0201676



Insulating sleeve, Color: red

---

Insulating sleeve - MPS-IH BU - 0201689



Insulating sleeve, Color: blue

---

Insulating sleeve - MPS-IH YE - 0201692



Insulating sleeve, Color: yellow

---

Insulating sleeve - MPS-IH GN - 0201702



Insulating sleeve, Color: green

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Insulating sleeve - MPS-IH GY - 0201728



Insulating sleeve, Color: gray

---

Insulating sleeve - MPS-IH BK - 0201731



Insulating sleeve, Color: black

---

### Jumper

Plug-in bridge - FBS 2-5 - 3030161



Plug-in bridge, Pitch: 5.2 mm, Length: 22.7 mm, Width: 9 mm, Number of positions: 2, Color: red

---

Plug-in bridge - FBS 3-5 - 3030174



Plug-in bridge, Pitch: 5.2 mm, Length: 22.7 mm, Width: 14.2 mm, Number of positions: 3, Color: red

---

Plug-in bridge - FBS 4-5 - 3030187



Plug-in bridge, Pitch: 5.2 mm, Length: 22.7 mm, Width: 19.4 mm, Number of positions: 4, Color: red

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Plug-in bridge - FBS 5-5 - 3030190



Plug-in bridge, Pitch: 5.2 mm, Length: 22.7 mm, Width: 24.6 mm, Number of positions: 5, Color: red

---

Plug-in bridge - FBS 10-5 - 3030213



Plug-in bridge, Pitch: 5.2 mm, Length: 22.7 mm, Width: 50.6 mm, Number of positions: 10, Color: red

---

Plug-in bridge - FBS 20-5 - 3030226



Plug-in bridge, Pitch: 5.2 mm, Number of positions: 20, Color: red

---

Plug-in bridge - FBS 50-5 - 3038930



Plug-in bridge, Pitch: 5.2 mm, Number of positions: 50, Color: red

---

Plug-in bridge - FBSR 2-5 - 3033702



Plug-in bridge, Pitch: 5.2 mm, Number of positions: 2, Color: red

---



## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Plug-in bridge - FBSR 3-5 - 3001591



Plug-in bridge, Pitch: 5.2 mm, Number of positions: 3, Color: red

---

Plug-in bridge - FBSR 4-5 - 3001592



Plug-in bridge, Pitch: 5.2 mm, Number of positions: 4, Color: red

---

Plug-in bridge - FBSR 5-5 - 3001593



Plug-in bridge, Pitch: 5.2 mm, Number of positions: 5, Color: red

---

Plug-in bridge - FBSR 10-5 - 3033710



Plug-in bridge, Pitch: 5.2 mm, Number of positions: 10, Color: red

---

### Labeled terminal marker

Zack marker strip - ZB 5 CUS - 0824962



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 5.15 x 10.5 mm

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

#### Zack marker strip - ZB 5,LGS:FORTL.ZAHLEN - 1050017



Zack marker strip, Strip, white, labeled, Printed horizontally: Consecutive numbers 1 - 10, 11 - 20, etc. up to 491 - 500, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 5.15 x 10.5 mm

---

#### Zack marker strip - ZB 5,QR:FORTL.ZAHLEN - 1050020



Zack marker strip, Strip, white, labeled, can be labeled with: Plotter, Printed vertically: Consecutive numbers 1 - 10, 11 - 20, etc. up to 491 - 500, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 5.15 x 10.5 mm

---

#### Zack marker strip - ZB 5,LGS:GLEICHE ZAHLEN - 1050033



Zack marker strip, Strip, white, labeled, can be labeled with: Plotter, Printed horizontally: Identical numbers 1 or 2, etc. up to 100, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 5.15 x 10.5 mm

---

#### Marker for terminal blocks - ZB 5,LGS:L1-N,PE - 1050415



Marker for terminal blocks, Strip, white, labeled, Horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 5.15 x 10.5 mm

---

#### Marker for terminal blocks - UC-TM 5 CUS - 0824581



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 10.5 x 4.6 mm

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Marker for terminal blocks - UCT-TM 5 CUS - 0829595



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, Mounting type: Snap into tall marker groove, Lettering field: 4.6 x 10.5 mm

---

### Marker pen

Marker pen - X-PEN 0,35 - 0811228



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

---

### Partition plate

Partition plate - ATP-UT - 3047167



Partition plate, Length: 50 mm, Width: 2.2 mm, Height: 48 mm, Color: gray

---

Spacer plate - DP PS-5 - 3036725



Spacer plate, Length: 22.4 mm, Width: 5.2 mm, Height: 29 mm, Number of positions: 1, Color: red

---

### Reducing bridge

Reducing bridge - RB UT 10-(2,5/4) - 3047060



Reducing bridge, Pitch: 9.5 mm, Number of positions: 2, Color: red

---

### Screwdriver tools

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Screwdriver - SZS 0,6X3,5 - 1205053



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

### Terminal marking

Zack marker strip - ZB 5 :UNBEDRUCKT - 1050004



Zack marker strip, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 5.1 x 10.5 mm

---

Marker for terminal blocks - UC-TM 5 - 0818108



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK CLED, BLUEMARK LED, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 10.5 x 4.6 mm

---

Marker for terminal blocks - UCT-TM 5 - 0828734



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: THERMOMARK CARD, BLUEMARK CLED, BLUEMARK LED, TOPMARK LASER, THERMOMARK PRIME, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 4.6 x 10.5 mm

---

### Test plug terminal block

Test plugs - MPS-MT - 0201744



Test plugs, with solder connection up to 1 mm<sup>2</sup> conductor cross section, Color: silver

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Test plugs - PS-5 - 3030983



Test plugs, Color: red

---

Test plugs - PS-5/2,3MM RD - 3038723



Test plugs, Color: red

---

Test socket

Test adapter - PAI-4-FIX-5/6 BU - 3035975



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

Test adapter - PAI-4-FIX-5/6 OG - 3035974



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

Test adapter - PAI-4-FIX-5/6 YE - 3035977



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Test adapter - PAI-4-FIX-5/6 RD - 3035976



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

Test adapter - PAI-4-FIX-5/6 GN - 3035978



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

Test adapter - PAI-4-FIX-5/6 BK - 3035980



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

Test adapter - PAI-4-FIX-5/6 GY - 3035982



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

Test adapter - PAI-4-FIX-5/6 VT - 3035979



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Test adapter - PAI-4-FIX-5/6 BN - 3035981



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

Test adapter - PAI-4-FIX-5/6 WH - 3035983



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

Test adapter - PAI-4-N GY - 3032871



4 mm test adapter, for terminal blocks with 5.2 mm, 6.2 mm and 8.2 mm pitch

---

### Additional products

Plug - SP 2,5/ 1 - 3040258



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: gray

---

Plug - SP 2,5/ 2 - 3040261



Plug, Connection method: Spring-cage connection, Number of positions: 2, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 10.4 mm, Height: 39 mm, Color: gray

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Plug - SP 2,5/ 3 - 3040274



Plug, Connection method: Spring-cage connection, Number of positions: 3, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 15.6 mm, Height: 39 mm, Color: gray

---

Plug - SP 2,5/ 4 - 3040287



Plug, Connection method: Spring-cage connection, Number of positions: 4, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 20.8 mm, Height: 39 mm, Color: gray

---

Plug - SP 2,5/ 5 - 3040290



Plug, Connection method: Spring-cage connection, Number of positions: 5, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 26 mm, Height: 39 mm, Color: gray

---

Plug - SP 2,5/ 6 - 3040300



Plug, Connection method: Spring-cage connection, Number of positions: 6, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 31.2 mm, Height: 39 mm, Color: gray

---

Plug - SP 2,5/ 7 - 3040313



Plug, Connection method: Spring-cage connection, Number of positions: 7, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 36.4 mm, Height: 39 mm, Color: gray

---



## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Plug - SP 2,5/ 8 - 3040326



Plug, Connection method: Spring-cage connection, Number of positions: 8, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 41.6 mm, Height: 39 mm, Color: gray

---

Plug - SP 2,5/ 9 - 3040339



Plug, Connection method: Spring-cage connection, Number of positions: 9, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 46.8 mm, Height: 39 mm, Color: gray

---

Plug - SP 2,5/10 - 3040342



Plug, Connection method: Spring-cage connection, Number of positions: 10, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 52 mm, Height: 39 mm, Color: gray

---

Plug - SP 2,5/11 - 3040355



Plug, Connection method: Spring-cage connection, Number of positions: 11, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 57.2 mm, Height: 39 mm, Color: gray

---

Plug - SP 2,5/12 - 3040368



Plug, Connection method: Spring-cage connection, Number of positions: 12, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 62.4 mm, Height: 39 mm, Color: gray

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

#### Plug - SP 2,5/13 - 3040371



Plug, Connection method: Spring-cage connection, Number of positions: 13, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 67.6 mm, Height: 39 mm, Color: gray

---

#### Plug - SP 2,5/14 - 3040384



Plug, Connection method: Spring-cage connection, Number of positions: 14, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 72.8 mm, Height: 39 mm, Color: gray

---

#### Plug - SP 2,5/15 - 3040397



Plug, Connection method: Spring-cage connection, Number of positions: 15, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 78 mm, Height: 39 mm, Color: gray

---

#### Plug - SP 2,5/ 1 BU - 3040698



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: blue

---

#### Plug - SP 2,5/ 1 GNYE - 3040708



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: green-yellow

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Plug - SPB 2,5/ 1 - 3040106



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: gray

---

Plug - SPB 2,5/ 2 - 3040119



Plug, Connection method: Spring-cage connection, Number of positions: 2, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 10.4 mm, Height: 39 mm, Color: gray

---

Plug - SPB 2,5/ 3 - 3040122



Plug, Connection method: Spring-cage connection, Number of positions: 3, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 15.6 mm, Height: 39 mm, Color: gray

---

Plug - SPB 2,5/ 4 - 3040135



Plug, Connection method: Spring-cage connection, Number of positions: 4, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 20.8 mm, Height: 39 mm, Color: gray

---

Plug - SPB 2,5/ 5 - 3040143



Plug, Connection method: Spring-cage connection, Number of positions: 5, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 26 mm, Height: 39 mm, Color: gray

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Plug - SPB 2,5/ 6 - 3040151



Plug, Connection method: Spring-cage connection, Number of positions: 6, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 31.2 mm, Height: 39 mm, Color: gray

---

Plug - SPB 2,5/ 7 - 3040164



Plug, Connection method: Spring-cage connection, Number of positions: 7, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 36.4 mm, Height: 39 mm, Color: gray

---

Plug - SPB 2,5/ 8 - 3040177



Plug, Connection method: Spring-cage connection, Number of positions: 8, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 41.6 mm, Height: 39 mm, Color: gray

---

Plug - SPB 2,5/ 9 - 3040180



Plug, Connection method: Spring-cage connection, Number of positions: 9, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 46.8 mm, Height: 39 mm, Color: gray

---

Plug - SPB 2,5/10 - 3040193



Plug, Connection method: Spring-cage connection, Number of positions: 10, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 52 mm, Height: 39 mm, Color: gray

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Plug - SPB 2,5/11 - 3040203



Plug, Connection method: Spring-cage connection, Number of positions: 11, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 57.2 mm, Height: 39 mm, Color: gray

---

Plug - SPB 2,5/12 - 3040216



Plug, Connection method: Spring-cage connection, Number of positions: 12, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 62.4 mm, Height: 39 mm, Color: gray

---

Plug - SPB 2,5/13 - 3040229



Plug, Connection method: Spring-cage connection, Number of positions: 13, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 67.6 mm, Height: 39 mm, Color: gray

---

Plug - SPB 2,5/14 - 3040232



Plug, Connection method: Spring-cage connection, Number of positions: 14, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 72.8 mm, Height: 39 mm, Color: gray

---

Plug - SPB 2,5/15 - 3040245



Plug, Connection method: Spring-cage connection, Number of positions: 15, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 78 mm, Height: 39 mm, Color: gray

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Plug - SPB 2,5/ 1 BU - 3040724



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: blue

---

Plug - SPB 2,5/ 1 GNYE - 3040711



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: green-yellow

---

Plug - UPBV 2,5/ 1 - 3045145



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: gray

---

Plug - UPBV 2,5/ 2 - 3045402



Plug, Connection method: Screw connection, Number of positions: 2, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 10.4 mm, Height: 47 mm, Color: gray

---

Plug - UPBV 2,5/ 3 - 3045415



Plug, Connection method: Screw connection, Number of positions: 3, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 15.6 mm, Height: 47 mm, Color: gray

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Plug - UPBV 2,5/ 4 - 3045428



Plug, Connection method: Screw connection, Number of positions: 4, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 20.8 mm, Height: 47 mm, Color: gray

---

Plug - UPBV 2,5/ 5 - 3045431



Plug, Connection method: Screw connection, Number of positions: 5, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 26 mm, Height: 47 mm, Color: gray

---

Plug - UPBV 2,5/ 6 - 3045444



Plug, Connection method: Screw connection, Number of positions: 6, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 31.2 mm, Height: 47 mm, Color: gray

---

Plug - UPBV 2,5/ 7 - 3045457



Plug, Connection method: Screw connection, Number of positions: 7, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 36.4 mm, Height: 47 mm, Color: gray

---

Plug - UPBV 2,5/ 8 - 3045460



Plug, Connection method: Screw connection, Number of positions: 8, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 41.6 mm, Height: 47 mm, Color: gray

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

#### Plug - UPBV 2,5/ 9 - 3045473



Plug, Connection method: Screw connection, Number of positions: 9, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 46.8 mm, Height: 47 mm, Color: gray

---

#### Plug - UPBV 2,5/10 - 3045499



Plug, Connection method: Screw connection, Number of positions: 10, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 52 mm, Height: 47 mm, Color: gray

---

#### Plug - UPBV 2,5/11 - 3045509



Plug, Connection method: Screw connection, Number of positions: 11, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 57.2 mm, Height: 47 mm, Color: gray

---

#### Plug - UPBV 2,5/12 - 3045512



Plug, Connection method: Screw connection, Number of positions: 12, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 62.4 mm, Height: 47 mm, Color: gray

---

#### Plug - UPBV 2,5/13 - 3045525



Plug, Connection method: Screw connection, Number of positions: 13, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 67.6 mm, Height: 47 mm, Color: gray

---



## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Plug - UPBV 2,5/14 - 3045538



Plug, Connection method: Screw connection, Number of positions: 14, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 72.8 mm, Height: 47 mm, Color: gray

---

Plug - UPBV 2,5/15 - 3045541



Plug, Connection method: Screw connection, Number of positions: 15, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 78 mm, Height: 47 mm, Color: gray

---

Plug - UPBV 2,5/ 1 BU - 3045240



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: blue

---

Plug - UPBV 2,5/ 1 GNYE - 3045253



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: green-yellow

---

Plug - UPBV 2,5/ 1-L - 3045318



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: gray

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Plug - UPBV 2,5/ 1-L BU - 3045321



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: blue

---

Plug - UPBV 2,5/ 1-L GNYE - 3045334



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: green-yellow

---

Plug - UPBV 2,5/ 1-M - 3045347



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: gray

---

Plug - UPBV 2,5/ 1-M BU - 3045350



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: blue

---

Plug - UPBV 2,5/ 1-M GNYE - 3045363



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: green-yellow

---

## Feed-through terminal block - UT 2,5/1P - 3045017

### Accessories

Plug - UPBV 2,5/ 1-R - 3045376



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: gray

---

Plug - UPBV 2,5/ 1-R BU - 3045389



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: blue

---

Plug - UPBV 2,5/ 1-R GNYE - 3045392



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: green-yellow

---

---