


P1: M-139  
 P2: M-139  
 P3: M-483

RE:1 2002.10.03

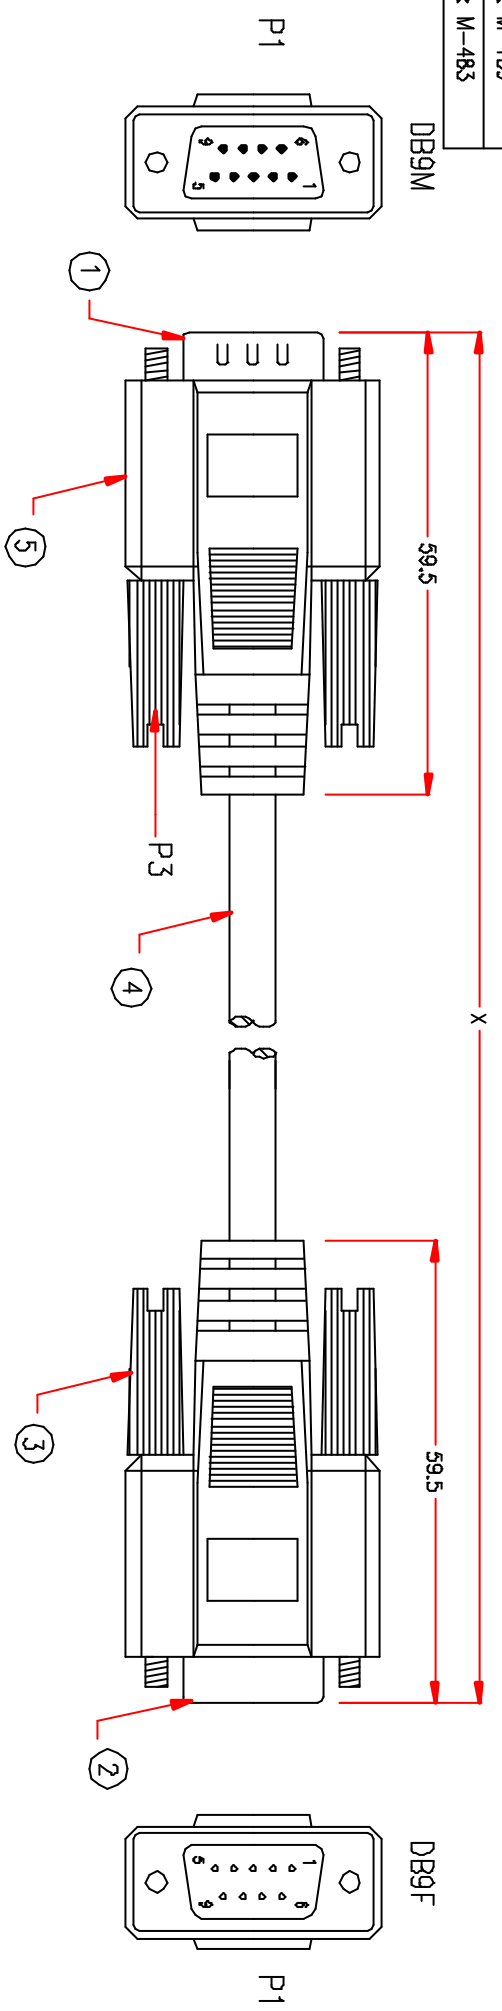

1006	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
SHIELD	SHIELD

X	MM
1	1000
2	2000
3	3000
5	5000
10	10000

No.	DESCRIPTION	QTY	Supplier
5	MOLDED PVC BEIGE		M304
4	NON UL 9C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0, JACKET BEIGE		M304
3	MOLDED THUMBSCREW #4-40, BEIGE	4	M95
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR	1	M108
1	DB9 MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR	1	M108

<b>PART NO. 1006-2M</b>		Revision:	
APPROVED			
CHECKED	<b>JOAN</b>		
DRAWING	<b>JASON</b>	ITEM NO.	<b>EK131.X</b>

**ELEKTRONIK**

Cable Length  
 Unless Other Spec.  
 Tolerances:  
 0 ~0.2M ±0.01M  
 0.2~1.0M ±0.02M  
 1.1 ~1.5M ±0.025M  
 1.5~2.1M ±0.03M  
 2.1M ↓ ±0.04M