




MINI GC 15M-M

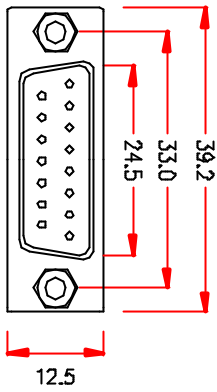

SPECIFICATION:

1. VOLTAGE RATING: 300V AC(rms).
2. CURRENT RATING: 5 AMP CONTINUOUS
3. DIELECTRIC STRENGTH 1000VAC
4. CONTACT RESISTANCE: 10 M Ohm min
5. INSULATION RESISTANCE: 5000 M Ohm min
6. DURABILITY: 30 CYCLES FOR GOLD FLASH
150 CYCLES FOR 15 μ " COLD PLATED
7. CORROSION RESISTANCE: MEET M-STD-202F METHOD
101 CONITION BSALT WATER
SPRAY OR GOLD PLATED OVER 15 μ "
8. MATING FORCE INSERTION FORCE: 0Z-16 OZ
AVERAGE 150 GRAM
EXTRACTION FORCE: 1KG MIN

PART NO. 0021		Revision:	
APPROVED			
CHECKED	JOAN		
DRAWING	CAT		
	ITEM NO.	EB412	
Cable Length		Tolerances:	
Unless Other Spec.			
0	$\pm 0.2M$	$\pm 0.01M$	
0.21~1.0M	$\pm 0.02M$	$\pm 0.02M$	
1.1 ~1.5M	$\pm 0.025M$	$\pm 0.03M$	
1.51~2.1M	$\pm 0.03M$	$\pm 0.04M$	
2.1M	$\pm 0.04M$		