
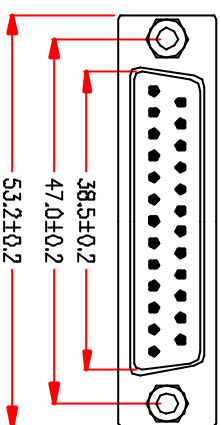
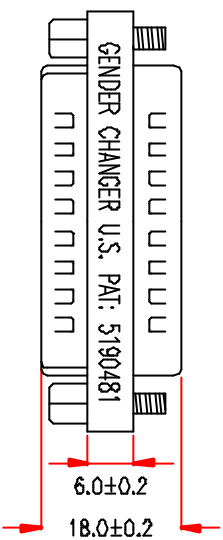


MINI GC 25M-M



SPECIFICATION:

1. VOLTAGE RATING: 300V AC(rms).
2. CURRENT RATING: 5 AMP CONTINUOUS
3. DIELECTRIC STRENGTH 1000VAC
4. CONTACT RESISTANCE: 10 m Ohm min
5. INSULATION RESISTANCE: 5000 M Ohm min
6. DURABILITY: 30 CYCLEES FOR GOLD FLASH
150 CYCLES FOR 15u" GOLD PLATED
7. CORROSION RESISATANCE: MEET M-STD-202F METHOD
101 CONITION BSALT WATER
SPRAY OR GOLD PLATED OVER 15u"
AVERAGE 150 GRAM
EXTRACTION FORCE: 1KG MIN
- 8.MATING FORCE INSERTION FORCE: 02-16 OZ

PART NO. 0027		Revision:	
APPROVED			
CHECKED	JOAN		
DRAWING	Cat		
	ITEM NO.	EB414	
Cable Length		Unless Other Spec.	
Tolerances:			
0 ~0.2M	±0.01M		
0.2~1.0M	±0.02M		
1.1 ~1.5M	±0.025M		
1.5~2.1M	±0.03M		
2.1M ↓	±0.04M		