


Rittal – The System.

Faster – better – everywhere.



KX 1585.000

Bus enclosures KX

State: 20/11/2023 (Source: rittal.com/com-en)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



KX 1585.000 - Bus enclosures KX Stainless steel

The stainless steel bus enclosure KX offers excellent accessibility with 180° hinges as standard, plus a high protection category of IP 66.

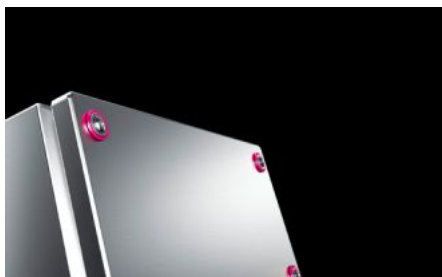

Features

Model No.	KX 1585.000
Product description	The stainless steel bus enclosure KX offers excellent accessibility with 180° hinges as standard, plus a high protection category of IP66.
Material	Enclosure: Stainless steel 1.4301 (AISI 304) Cover: Stainless steel 1.4301 (AISI 304), all-round foamed-in PU seal Hinges: Die-cast zinc
Surface finish	Enclosure and cover: Brushed, grain 180 180° hinges: chrome-plated
Supply includes	Enclosure with cover 180° hinges Quick-release fastener including plastic bushes
Protection category NEMA	NEMA 1, 3R, 4, 4X, 12
Protection category to IEC 60 529	IP 66
Type rating to UL 50E	Type 1, 3R, 4, 4X, 12
Dimensions	Width: 400 mm Height: 200 mm Depth: 120 mm
Material thickness - cover	1.25 mm
Material thickness - enclosure	1.25 mm
Basic material	Stainless steel 1.4301 (AISI 304)

Features

Packs of	1 pc(s).
Weight/pack	3.92 kg
Customs tariff number	94032080
EAN	4028177919112
ETIM 7.0	EC000261
ECLASS 8.0	27180101

Tender text

Enclosure (bus enclosure, stainless steel)

Enclosure with cover:

Stable stainless steel design,
body folded from a single piece and welded,
with protection channel all-round cover opening,
rear panel with knockouts, lid hinged at bottom,
with all-round foamed-in PU seal,
with PE conductor connection in the enclosure,
earthing in the cover via bolt,
with quick-release fastener.

QR code:

QR code printed on body, cover and rating plate
for clear identification and easy retrieval of relevant
product information and documentation,
and for clear traceability of the individual parts.

Accessories: Mounting plate, top hat rail,
wall mounting bracket,
mounting claw for second mounting level.

Material:

Enclosure, cover: Stainless steel 1.4301 (AISI 304)

Hinges: Die-cast zinc

Enclosure and cover surface finish:

Brushed, grain size 180

Protection category to IEC 60 529: IP 66

Protection category to UL 508A: Type 4X

Dimensions (W x H x D): 400x200x120 mm