

Rittal – The System.

Faster – better – everywhere.

Cable gland HD – HD 2410.000

Date : Mar 22, 2016

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Cable gland HD – HD 2410.000

created : 22.03.2016 on www.rittal.com/com-en

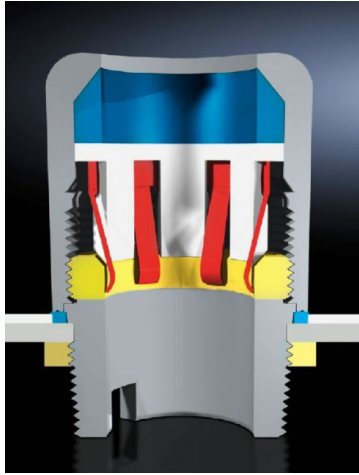



Product description

| | |
|--|---|
| Benefits: | Smooth, solid exterior surfaces effectively prevent the depositing of harmful micro-organisms. Much easier, and therefore cheaper to clean compared with conventional cable glands. |
| Applications: | Manufacturer Clean room technology (e.g. pharmaceuticals) Biotechnology Chemical industry |
| Material: | Cap nut: Stainless steel 1.4305 (AISI 303) Seal: Conforms to FDA 21 CFR 177.2600 |
| Protection category IP to IEC 60 529: | IP 68 (5 bar, 30 min) |
| Protection category IP to DIN 40 050-9: | IP 69K |
| Packs of: | 5 pc(s). |
| EAN: | 4028177022447 |
| Customs tariff number: | 73181900 |
| eCl@ss 5.1: | 27180102 |
| eCl@ss 7.0: | 27189265 |
| ETIM 6.0: | EC000441 |


Product features

| | |
|--------------------------------------|-----------------------------------|
| Design: | Standard version |
| Ambient temperature range: | -20°C...+100°C |
| Thread: | M12 x 1.5 |
| Operating temperature (max.): | 100 °C |
| Cable entry: | For cable diameter: 3 mm - 6.5 mm |
| Weight/pack: | 0.12 kg |

Approvals

| | |
|----------------------|---|
| Certificates: |  DGUV (DE) |
| Declarations: |  Manufacturer's declaration (DE) |

Downloads

| | |
|-----------------------|---|
| Documentation: |  Info sheet (PT, ZH, CS, FR, JP, RU, ES, DE, FI, KO, SV, NO, NL, VI, EN, HU, PL, IT, DA) |
| CAD drawings: | Request |