

# Rittal – The System.

Faster – better – everywhere.

## Cable gland HD – HD 2410.020

Date : Mar 22, 2016

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# Cable gland HD – HD 2410.020

created : 22.03.2016 on [www.rittal.com/com-en](http://www.rittal.com/com-en)

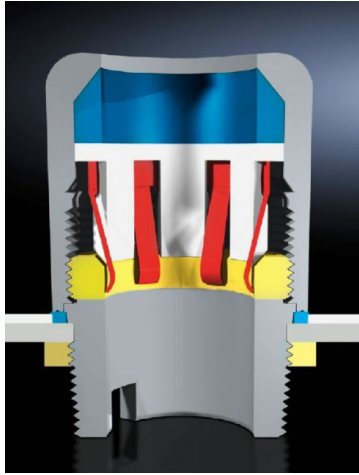



## Product description

|  |   |
|--|---|
| <b>Benefits:</b>                                   | Smooth, solid exterior surfaces effectively prevent the depositing of harmful micro-organisms. Much easier, and therefore cheaper to clean compared with conventional cable glands. |
| <b>Applications:</b>                               | Manufacturer<br>Clean room technology (e.g. pharmaceuticals)<br>Biotechnology<br>Chemical industry  |
| <b>Material:</b>                                   | Cap nut: Stainless steel 1.4305 (AISI 303)<br>Seal: Conforms to FDA 21 CFR 177.2600   |
| <b>Protection category<br/>IP to IEC 60 529:</b>   | IP 68 (5 bar, 30 min)   |
| <b>Protection category<br/>IP to DIN 40 050-9:</b> | IP 69K  |
| <b>Packs of:</b>                                   | 5 pc(s).  |
| <b>EAN:</b>  | 4028177162204   |
| <b>Customs tariff<br/>number:</b>                  | 73181900  |
| <b>eCl@ss 5.1:</b>                                 | 27180102  |
| <b>eCl@ss 7.0:</b>                                 | 27189265  |
| <b>ETIM 6.0:</b>                                   | EC000441  |


## Product features

|                                      |                                  |
|--------------------------------------|----------------------------------|
| <b>Design:</b>                       | Standard version                 |
| <b>Ambient temperature range:</b>    | -20°C...+100°C                   |
| <b>Thread:</b>                       | M20 x 1.5                        |
| <b>Operating temperature (max.):</b> | 100 °C                           |
| <b>Cable entry:</b>                  | For cable diameter: 6 mm - 12 mm |
| <b>Weight/pack:</b>                  | 0.35 kg                          |

## Approvals

|                      |   |
|----------------------|---|
| <b>Certificates:</b> |  <a href="#">DGUV (DE)</a>                       |
| <b>Declarations:</b> |  <a href="#">Manufacturer's declaration (DE)</a> |

## Downloads

|                       |   |
|-----------------------|---|
| <b>Documentation:</b> |  <a href="#">Info sheet (PT, ZH, CS, FR, JP, RU, ES, DE, FI, KO, SV, NO, NL, VI, EN, HU, PL, IT, DA)</a> |
| <b>CAD drawings:</b>  | Request   |