

Rittal – The System.

Faster – better – everywhere.

Cable gland HD – HD 2410.030

Date : Mar 22, 2016

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Cable gland HD – HD 2410.030

created : 22.03.2016 on www.rittal.com/com-en

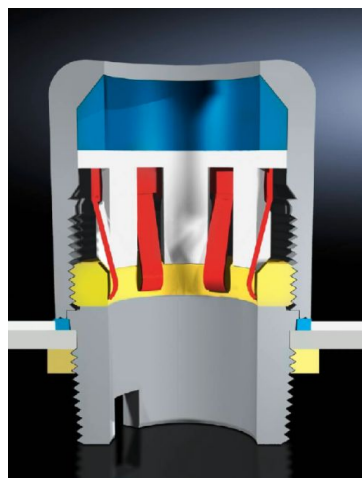

Product description

Benefits: Smooth, solid exterior surfaces effectively prevent the depositing of harmful micro-organisms. Much easier, and therefore cheaper to clean compared with conventional cable glands.

Applications: Manufacturer
Clean room technology (e.g. pharmaceuticals)
Biotechnology
Chemical industry

Material: Cap nut: Stainless steel 1.4305 (AISI 303)
Seal: Conforms to FDA 21 CFR 177.2600

**Protection category
IP to IEC 60 529:** IP 68 (5 bar, 30 min)

**Protection category
IP to DIN 40 050-9:** IP 69K

Packs of: 5 pc(s).

EAN: 4028177552135

**Customs tariff
number:** 73181900

eCl@ss 5.1: 27180102



eCl@ss 7.0: 27189265

ETIM 6.0: EC000441


Product features

Design:	Standard version
Ambient temperature range:	-20°C...+100°C
Thread:	M25 x 1.5
Operating temperature (max.):	100 °C
Cable entry:	For cable diameter: 11 mm - 17 mm
Weight/pack:	0.58 kg

Approvals

Certificates:	 DGUV (DE)
Declarations:	 Manufacturer's declaration (DE)

Downloads

Documentation:	 Info sheet (PT, ZH, CS, FR, JP, RU, ES, DE, FI, KO, SV, NO, NL, VI, EN, HU, PL, IT, DA)
CAD drawings:	Request