

Rittal – The System.

Faster – better – everywhere.

Conductor connection clamp – SV 3451.500

Date : Jan 12, 2022

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Conductor connection clamp – SV 3451.500

created: 12.01.2022 build on www.rittal.com/uk-en

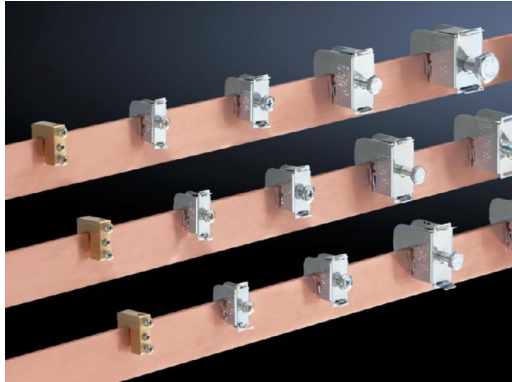

Product description

Description: For connecting round conductors and laminated copper bars.

Material: Sheet steel

Surface finish: Zinc-plated, passivated

Note: Wire end ferrules should be used with fine wire conductors

Product description

To fit busbars: Cross-section (thickness): 5 mm

Clamping area for laminated copper bars: Width: 8 mm
Height: 8 mm

Connection for round conductor cross-sections: 2,5 mm² - 16 mm²

Packs of: 15 pc(s).

Weight/pack: 0.42 kg

Copper weight (kg per piece): 0

EAN: 4028177042681

Customs tariff number: 85369010

ETIM 7.0:	EC000001
ETIM 6.0:	EC000001
eCl@ss 8.0/8.1:	27141146
eCl@ss 6.0/6.1:	27141146
Product description:	SV Conductor connection clamp, 2,5-16 mm ² , clamping area WH: 8x8 mm, for bar thickness 5 mm
Approvals	
Approvals:	C-UR UR
Certificates:	EAC
Declarations:	Declaration of conformity