

Rittal – The System.

Faster – better – everywhere.

► Utility lectern for TS, SE, CM, PC – PS 4638.800

Date : Nov 6, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Utility lectern for VX, TS, SE, CM, PC – PS 4638.800

created: 06.11.2018 on www.rittal.com/com-en

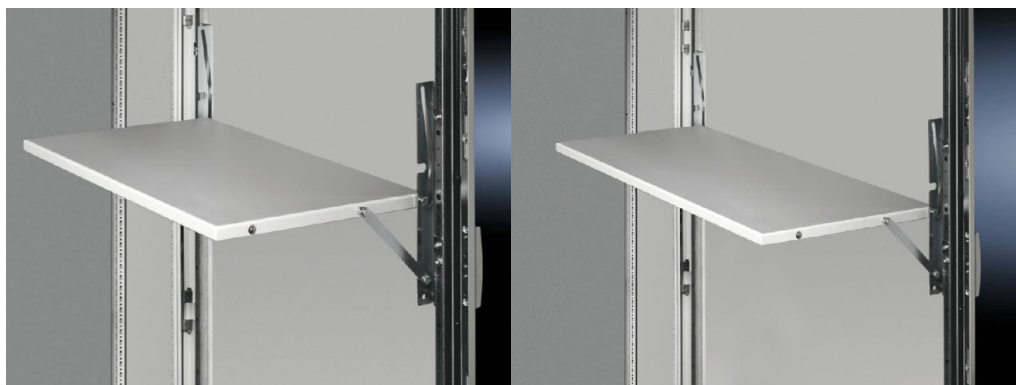

Product description

Description: For programming units etc. When required for servicing, it folds down quickly with a maximum support area, and after use can be stowed between the tubular door frames in a space-saving design.

Material: Sheet steel

Colour: RAL 7035

Product features

To fit: Enclosure type: VX
Enclosure type: TS 8
Enclosure type: SE
Enclosure type: CM
Enclosure type: PC

Installation options: On the tubular door frame
For external mounting on surfaces.

To fit door width: 800 mm

Support area: Width: 613 mm
Depth: 400 mm

Load capacity: Max. 300 N

Packs of: 1 pc(s).

Weight/pack: 3.8 kg

EAN:	4028177107519
Customs tariff number:	94039010
ETIM 6.0:	EC000784
ETIM 5.0:	EC000784
eCl@ss 8.0/8.1:	27180504
eCl@ss 7.0/7.1:	27182290
eCl@ss 6.0/6.1:	27182290
eCl@ss 5.1/5.1.4:	27189201
Product description (long):	PS Utility lectern, for TS, SE, CM, PC, for door width 800 mm