

# Rittal – The System.

Faster – better – everywhere.

## ► Mounting frame, 482.6 mm (19") for TS, TS IT – DK 5501.292

Date : Jan 20, 2019

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE



SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# Mounting frame, 482.6 mm (19") for TS, TS IT – DK 5501.292

created: 20.01.2019 on [www.rittal.com/com-en](http://www.rittal.com/com-en)

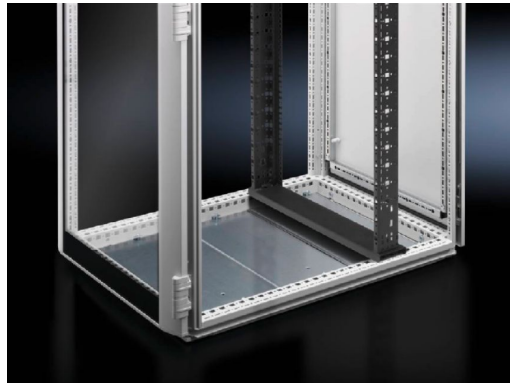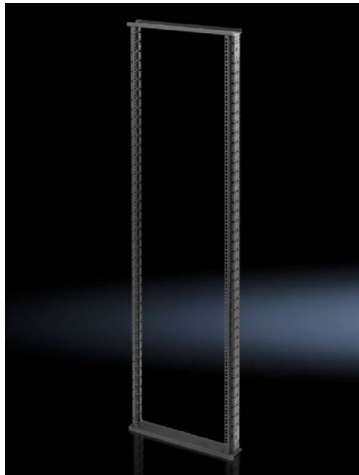

## Product description

**Description:** Firmly linked 482.6mm (19") mounting frame for integration of a 482.6 mm (19") mounting level within a TS frame structure. Profiles analogous to TS IT for complete system compatibility, incl. tool-free assembly. Depth-variable mounting between the roof and base frames. Individual height units bi-directionally numbered. Mounting frame at the front, prepared for the integration of cable management and Dynamic Rack Control (RFID), mounting frame at the rear for space-saving integration of the PDU busbar, in the Zero-U space on both sides.

**Material:** Sheet steel

**Surface finish:** Primed

**Colour:** RAL 9005

**Supply includes:** Assembly parts

**Note:** The outer mounting level of the enclosure frame is left free for other installed equipment. All-round compartmentalisation with air baffle plates is supported.

## Product features

**To fit:** Enclosure type: TS  
Enclosure type: TS IT  
Width: 800 mm  
Height: 2200 mm

**Mounting position:** Front

**Units:** 47 U

<b>Load capacity:</b>	Up to 10,000 N static load, with even load distribution on two 482.6 mm (19") mounting frames, fully configured.
<b>Weight/pack:</b>	16.6 kg
<b>ETIM 5.0:</b>	EC002620
<b>eCl@ss 8.0/8.1:</b>	27189261
<b>eCl@ss 6.0/6.1:</b>	27180907
<b>Product description:</b>	DK Mounting frame, 482.6 mm (19"), For WxH: 800x2200 mm, At the front, RAL 9005