

Rittal – The System.

Faster – better – everywhere.

► Mounting frame, 482.6 mm (19") for TS, TS IT – DK 5501.295

Date : Jan 20, 2019

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Mounting frame, 482.6 mm (19") for TS, TS IT – DK 5501.295

created: 20.01.2019 on www.rittal.com/com-en

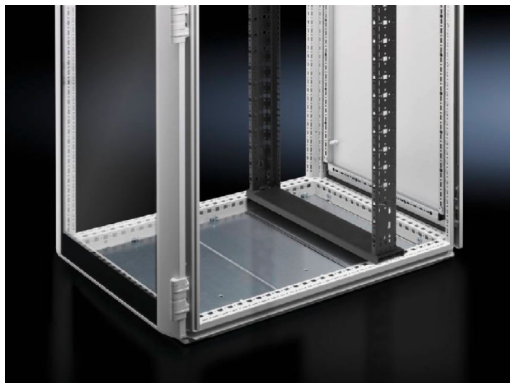

Product description

Description: Firmly linked 482.6mm (19") mounting frame for integration of a 482.6 mm (19") mounting level within a TS frame structure. Profiles analogous to TS IT for complete system compatibility, incl. tool-free assembly. Depth-variable mounting between the roof and base frames. Individual height units bi-directionally numbered. Mounting frame at the front, prepared for the integration of cable management and Dynamic Rack Control (RFID), mounting frame at the rear for space-saving integration of the PDU busbar, in the Zero-U space on both sides.

Material: Sheet steel

Surface finish: Primed

Colour: RAL 9005

Supply includes: Assembly parts

Note: The outer mounting level of the enclosure frame is left free for other installed equipment. All-round compartmentalisation with air baffle plates is supported.

Product features

To fit: Enclosure type: TS
Enclosure type: TS IT
Width: 800 mm
Height: 2200 mm

Mounting position: Rear

Units: 47 U

Load capacity:	Up to 10,000 N static load, with even load distribution on two 482.6 mm (19") mounting frames, fully configured.
Weight/pack:	17.95 kg
ETIM 5.0:	EC002620
eCl@ss 8.0/8.1:	27189261
eCl@ss 6.0/6.1:	27180907
Product description:	DK Mounting frame, 482.6 mm (19"), For WxH: 800x2200 mm, Rear, RAL 9005