

# Rittal – The System.

Faster – better – everywhere.

## ▶ TS punched section with mounting flange, 23 x 73 mm – TS 8612.560

Date : Apr 13, 2015

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# TS punched section with mounting flange, 23 x 73 mm – TS 8612.560

created : 13.04.2015 on [www.rittal.com/com-en](http://www.rittal.com/com-en)

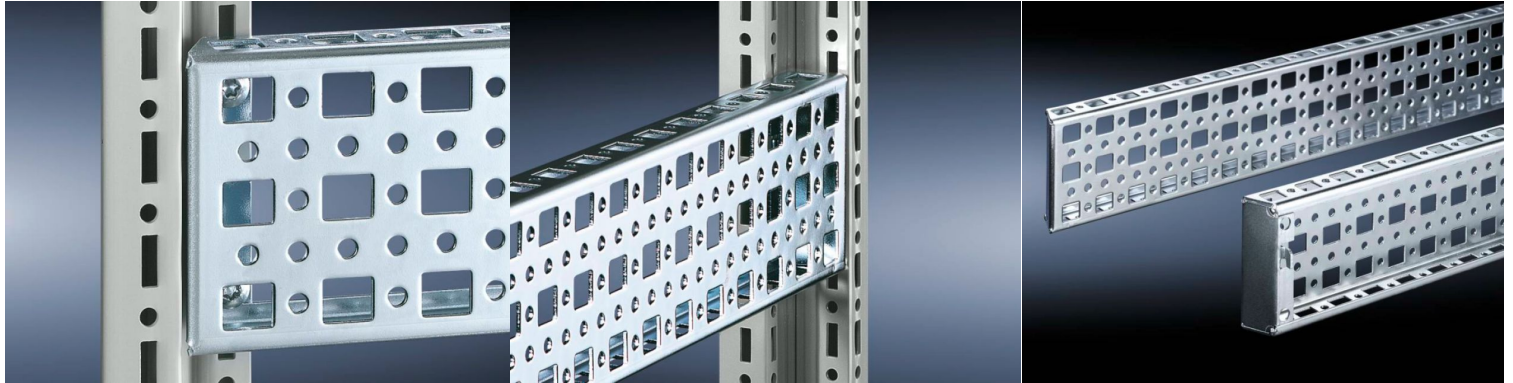

## Product description

**Description:** The alternative to the TS punched section with mounting flange 17 x 73 mm, with punchings for captive nuts/threaded blocks instead of the slotted holes top and bottom. Simply locate and secure.

**Material:** Sheet steel

**Surface finish:** Zinc-plated

**Supply includes:** Assembly screws

**Packs of:** 4 pc(s).

**EAN:** 4028177237391

**Customs tariff number:** 73269098

**eCl@ss 5.1:** 27189250

**eCl@ss 7.0:** 23159101

## Product features

**Design:** For the inner mounting level

**To fit:** Width/depth: 600 mm

---

<b>Installation options:</b>	On the vertical TS, SE enclosure section
------------------------------	--

---

<b>Weight/PU:</b>	2.76 kg
-------------------	---------

---

## Downloads

---

<b>Data sheets:</b>	 <a href="#">Technical details</a> EN
---------------------	---

---

<b>CAD drawings:</b>	Request
----------------------	---------

---